

# Legato® Interlocking Concrete Blocks



Class A1 fire resistant in accordance with clause 4.3.4.4 of EN 13369.

Elite are proud to present the ultimate interlocking block - Legato®, the name coming from the Italian for 'tied together'.

Elite are the only company in Europe to manufacture interlocking blocks using high strength (50N/mm<sup>2</sup>) concrete. This allows our Legato® blocks to exhibit extreme levels of durability, combined with the flexibility of having their own cast-in lifting pin. As each standard block will build 1.28m<sup>2</sup> of wall, they provide an incredibly quick solution in a wide variety of applications.

These include...

## **Support walls for roof structures**

## **Cofferdams**

## **Bay walls**

for materials such as...

- Aggregates
- Salt
- Light scrap metals
- Wood chip
- Tyres
- White goods
- RDF waste
- Black bag waste
- Bales etc...


## **Push Walls**

## **Grain storage**

## **Earth retention Etc etc...**

In addition, because the blocks do not contain anything other than high quality, locally sourced aggregates and Portland Cement, you can be assured that your investment will last a lifetime.

See reverse for the full range and specifications.

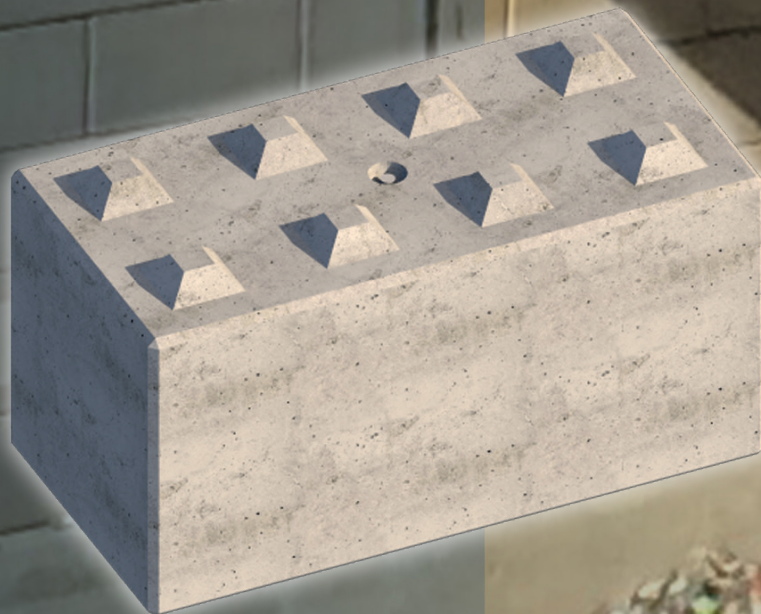

For more information on Elite quality concrete products  
phone 01952 588 885 or browse [www.eliteprecast.co.uk](http://www.eliteprecast.co.uk)



# Legato® Interlocking Concrete Blocks

## Legato® interlocking block range

Our Legato® blocks come in various sizes – including flat top versions – the standard block is an **LG8 1600mm x 800mm x 800mm** (highlighted in the table opposite) and weighs in at 2400 kgs.


As each Legato® block has its own lifting pin cast into it – you can easily change the way in which they are configured without the need for specialist lifting equipment or grabs.

Durability, strength and availability are the key features of these blocks and a next-day nationwide service means that you are never more than 24 hours away from taking delivery.

**Important note:** Prior to lifting older / pre-used blocks check the lifting pin for wear / corrosion and check the block for cracks. If the block is cracked or the pin is worn it could fail when being lifted.

**Additional Notes:** Wind loading can affect the stability of single skin, stand-alone Legato block walls above 4.8m high. If in doubt get it checked by a qualified structural engineer. Direct impact between mobile plant and the block walls is unnecessary and should be avoided as in extreme cases this could dislodge blocks from the wall. If you identify a particular risk then strapping the top layers can help to mitigate the risk.

Legato® Block Code	L x W x H mm	Weight
LG1	400 x 800 x 800	590kg
LG2	400 x 800 x 800	600kg
LG3	800 x 800 x 800	1180kg
LG4	800 x 800 x 800	1200kg
LG5	1200 x 800 x 800	1775kg
LG6	1200 x 800 x 800	1800kg
LG7	1600 x 800 x 800	2365kg
<b>LG8</b>	<b>1600 x 800 x 800</b>	<b>2400kg</b>
LG9	1600 x 800 x 800	1765kg
LG10	1600 x 800 x 800	1800kg
LG SPREADER	1600 x 800 x 800	1800kg
LG BENDI	1590 x 800 x 800	2240kg

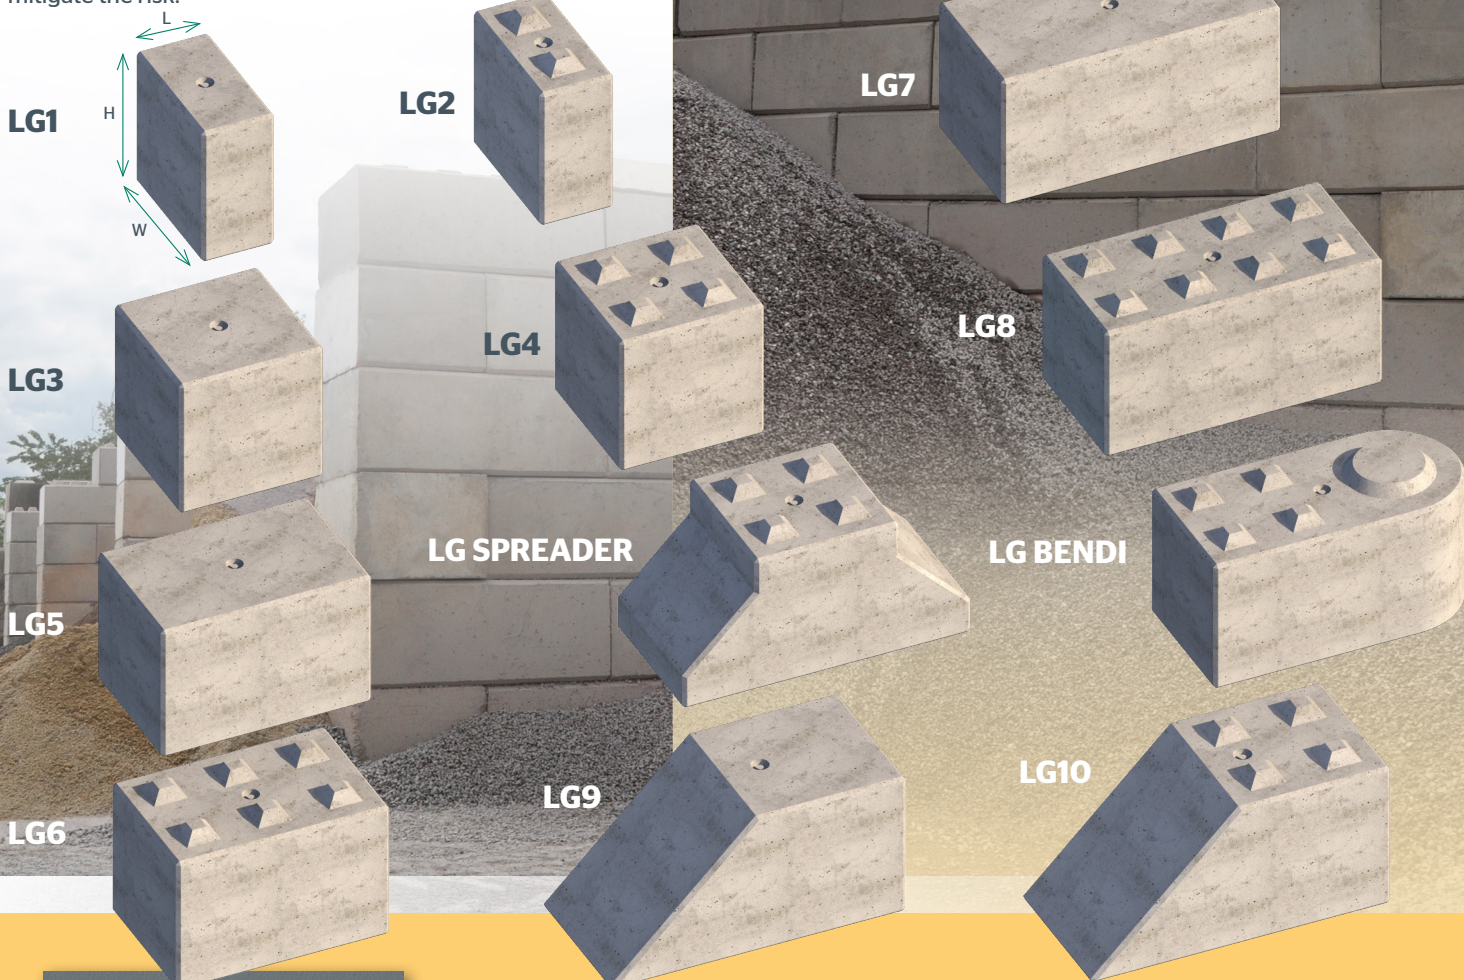

**ELITE**  
PRECAST CONCRETE

Elite Precast Concrete Limited  
Halesfield 9, Telford, Shropshire TF7 4QW  
Tel: 01952 588885 Fax: 01952 582011  
[www.eliteprecast.co.uk](http://www.eliteprecast.co.uk)

**Important note:**  
It is the customer's responsibility to ensure appropriate structural checks are carried out before any precast concrete products are installed.