



CIVILS AND
GROUNDWORKS

timloc
building products

CIVILS AND GROUNDWORKS

Timloc Building Products is one of the UK's leading manufacturers of building products for the residential market. Based in Howden, East Yorkshire, we design, manufacture and supply building product solutions from ground level right up to the roof ridge. Trust Timloc to deliver with our unrivalled NEXT DAY delivery service with a low carriage paid order value of just £100 to branch or £150 direct to site.

We have a wide range of products to suit groundwork requirements, from telescopic underfloor ventilation to top hat gas barriers.

timloc
building products

SALES

EMAIL: SALES@TIMLOC.CO.UK

TEL: 01405 765 567

TECHNICAL

EMAIL: TECHNICAL@TIMLOC.CO.UK

TEL: 01405 782 769



Visit the Timloc website for product information, data sheets, technical support and more:

WWW.TIMLOC.CO.UK

WHY **TRUST TIMLOC** WITH THE FULL PACKAGE?

- Easy to handle, flexible, durable and puncture resistant products
- Preformed mouldings eliminate the need for onsite fabrication and prevent errors from poor workmanship

- Time saving installation process
- Variable depths available for bespoke floor constructions
- Full itemised scheduling service available

Timloc Building Products is a **carbon neutral manufacturer**

At Timloc, we manufacture and supply sustainable building products designed to be integrated into the fabric of a building from ground level right up to the roof ridge. 75% of the products we manufacture are made from recycled materials and all of our products are made to last.




OUR JOURNEY TO **CARBON NEUTRALITY**

In 2021, Timloc became the **first building products manufacturer in the UK to achieve a carbon neutral status** after implementing various green initiatives to reduce and offset our carbon emissions to zero. 100% of our electricity is now generated from renewable energy sources, electric cars have been added to our fleet, and we have invested heavily in energy-efficient machinery, all of which contribute to our carbon neutral status.

Approximately 70% of our packaging is produced from recycled materials and **100% of our packaging is recyclable**.

All Timloc products experience a rigorous testing process prior to launch to ensure we only supply the highest quality products to market. The recycled materials we use originate from a variety of sources including plastic bottles, plastic trays and plastic car parts, such as bumpers and dashboards. The raw material produced as a result of the recycling process is robust, versatile, and environmentally friendly.

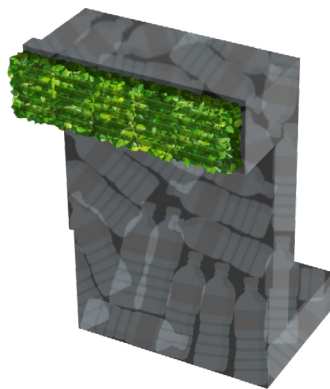

Trust Timloc to know the score...

100%

of our

Waste
is diverted from
landfill

Electricity
is generated from
renewable energy

Packaging
is recyclable



TELESCOPIC UNDERFLOOR VENTILATION



1201 TELESCOPIC UNDERFLOOR VENTILATOR

Adjustable ventilator providing ventilation beneath suspended ground floors up to 5 brick courses.

Product Code	Pack Quantity	Lead Time
1201	20	Next Working Day


1201XL

TELESCOPIC UNDERFLOOR VENTILATOR


Adjustable ventilator providing ventilation beneath suspended ground floors between 5-7 brick courses.

Product Code	Pack Quantity	Lead Time
1201XL	10	Next Working Day

Free airflow of 8000mm² per unit (6500mm² through 1201AB)



Vermin grille
incorporated

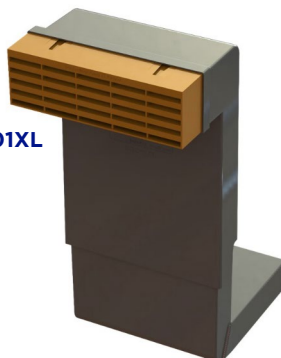

1201XL



1201AB

1201AB PLASTIC AIRBRICK

Airbrick ventilator for use with cavity sleeves and the 1201 and 1201XL telescopic underfloor ventilators.


Product Code	Pack Quantity	Lead Time
1201AB	20	Next Working Day

Colour code required at end of product code. Available in:


BB: Blue Black, BL: Black, BR: Brown, BU: Buff, CL: Clear, GR: Grey, TE: Terracotta & WH: White

TYPICAL DETAIL


Section drawing of a typical wall detail.

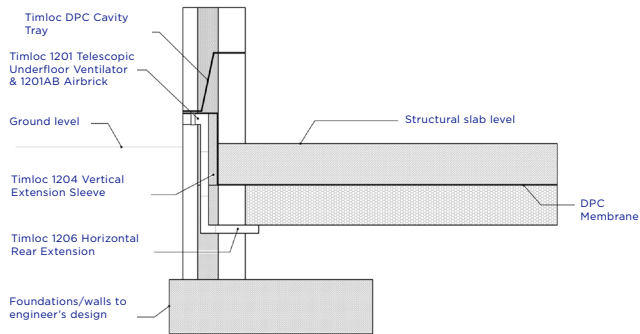

1201 EXTENSION ACCESSORIES

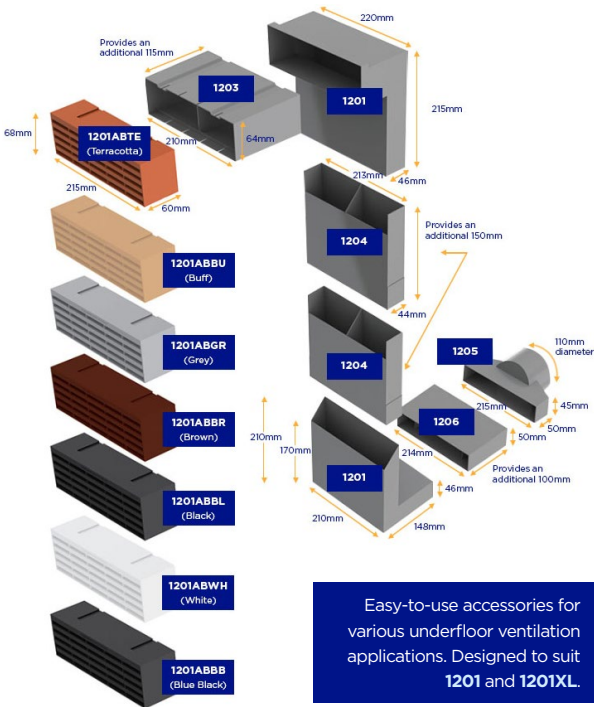

Easy-to-use accessories for various underfloor ventilation applications. Designed to suit 1201 and 1201XL.




1203
Horizontal Front Extension



1204
Vertical Extension Sleeve




1205
Duct Adapter



1206
Horizontal Rear Extension

Product Code	Pack Quantity	Lead Time
1203	20	Next Working Day
1204	20	Next Working Day
1205	1	Next Working Day
1206	1	Next Working Day

WALL WEEPS

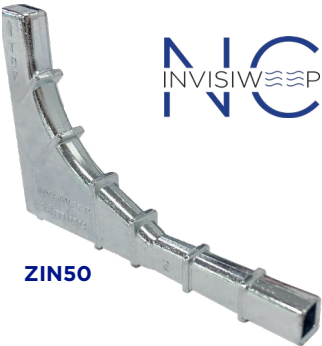

INVISIWEEP

INVISIWEEP NC WALL WEEP

- A1 non-combustible wall weep suitable for use in:
- High rise buildings above 18 metres as Regulation 7 (2) & Building Regulation approved document B.
 - High rise buildings above 11 metres as Building (Scotland) technical handbook 2019: domestic & non-domestic.

Product Code	Pack Quantity	Lead Time
ZIN50	50	Next Working Day



INVISIWEEP WALL WEEP

The almost-invisible, multi-function wall weep for discharging water from external walls.

Product Code	Pack Quantity	Lead Time
IW50	50	Next Working Day
IW200	200	Next Working Day



Colour code required at end of product code. Available in:
BB: Blue Black, **BL:** Black, **BR:** Brown, **BU:** Buff, **CL:** Clear, **GR:** Grey,
TE: Terracotta & **WH:** White




500mm extension
 piece available
 Code: **IW500EX**



1143

50mm extension
 piece available
 Code: **1144**



1143 CAVITY WALL WEEP VENT

Multi-function 1143 cavity wall weep designed for cavity ventilation and reliable discharge of water from inside cavity walls


Product Code	Pack Quantity	Lead Time
1143	50	Next Working Day

Colour code required at end of product code. Available in:
BB: Blue Black, **BL:** Black, **BR:** Brown, **BU:** Buff, **CL:** Clear, **GR:** Grey,
TE: Terracotta & **WH:** White

TOP HATS & ACCESSORIES

TOP HATS

For sealing to a gas barrier and at the intersection of pipe projections. Available in sizes 55mm to 160mm.

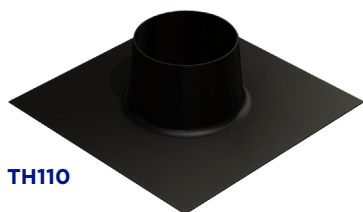


TH110

Product Code	Pack Quantity	Lead Time
TH055	1	3-5 Working Days
TH082	1	3-5 Working Days
TH110	1	Next Working Day
TH135	1	3-5 Working Days
TH160	1	3-5 Working Days

FLEXIBLE TOP HATS


Flexible enough to fit around difficult applications and are ideal for use in tight situations where a pipe is close to a wall. Available in sizes 110mm and 135mm.

Product Code	Pack Quantity	Lead Time
77110	1	Next Working Day
77135	1	Next Working Day

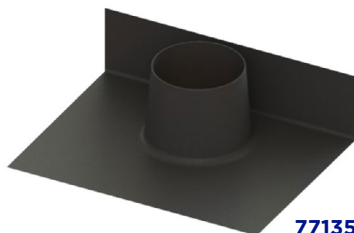

77135


77120

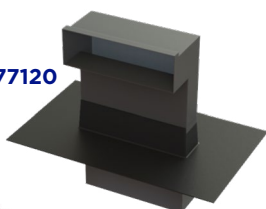

1201 TELEVENT TOP HATS

For sealing telescopic underfloor vent where gas protection is required. Designed for use with 1201 and 1201XL. TST01 for use when telescopic under floor vents need to pass through a perimeter cavity and still maintain gas tight integrity.

Product Code	Pack Quantity	Lead Time
77120	1	Next Working Day
TST01	1	3-5 Working Days



TST01

ACCESSORIES



JCLIP6

Product Code	Pack Quantity	To Suit	Lead Time
JCLIP5	1	TH055	Next Working Day
JCLIP6	1	TH082 & TH110	Next Working Day
JCLIP7	1	TH135 & TH160	Next Working Day
GTAPE01	1	Various	Next Working Day
GTAPE02	1	Various	Next Working Day

GAS BARRIER & DAMP PROOF MEMBRANE

CAVITY TRAY SYSTEMS & ACCESSORIES




RSUMP01

RADON SUMP

Prefabricated sumps are required when a sub floor depressurisation is required under full radon protection. The sump is installed beneath the floor slab in non suspended floor applications and vented to atmosphere via a connecting 110mm drainage pipe to an external source and capped off with proprietary products i.e. airbrick & telescopic under floor vent.

Product Code	Pack Quantity	Lead Time
RSUMP01	1	Next Working Day

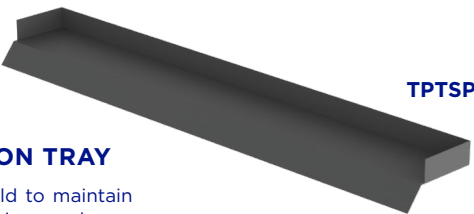


TPTSP

THRESHOLD INTERNAL PROTECTION TRAY

For detailing rebated areas inside door threshold to maintain water and gas tight integrity without having to trim membrane to fit. Available in Standard (TPT01) and Special (TPTSP) forms.


Product Code	Pack Quantity	Lead Time
TPT01	1	3-5 Working Days
TPTSP	1	3-5 Working Days

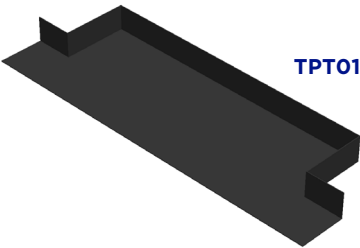

TPT01

PERIMETER CAVITY TRAYS

To be installed continuously around the external perimeter of a building to allow the membrane to be laid at a later stage and so prevent damage as building work proceeds. Supplied in 2.5m lengths.

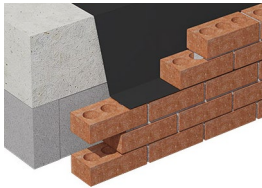

Product Description	Lead Time	50mm Code	75mm Code	100mm Code
Perimeter Cavity Tray 150mm Rise	3-5 Working Days	5101	5102	5103
Perimeter Cavity Tray 225mm Rise	3-5 Working Days	5104	5105	5106



5116

CORNER CAVITY TRAYS

Manufactured from heavy duty 2mm polyethylene.

Product Description	Lead Time	50mm Code	75mm Code	100mm Code
External 90° Corner Tray 150mm Rise	3-5 Working Days	5110	5112	5114
Internal 90° Corner Tray 150mm Rise	3-5 Working Days	5111	5113	5115
External 90° Corner Tray 225mm Rise	3-5 Working Days	5116	5118	5120
Internal 90° Corner Tray 225mm Rise	3-5 Working Days	5117	5119	5121
Slab Perimeter 90° Corner Tray 225mm Rise	3-5 Working Days	5123		



5123



5135


STOPENDS

Suitable if breaks appear in the natural run of the cavity tray system. Manufactured from heavy duty 2mm PP.

Product Description	Lead Time	50mm Code	75mm Code	100mm Code
Stop End Right Hand 150mm Rise	3-5 Working Days	5130	5132	5134
Stop End Left Hand 150mm Rise	3-5 Working Days	5131	5133	5135
Stop End Right Hand 225mm Rise	3-5 Working Days	5136	5138	5140
Stop End Left Hand 225mm Rise	3-5 Working Days	5137	5139	5141

CHANGE OF LEVEL UNITS

Available in the PCT (Perimeter Cavity Tray) range and manufactured from heavy duty 2mm PP. Suitable if breaks appear in the natural run of the cavity tray system, and available in cavity size and rise options with 75, 150 and 225mm steps.



Product Description	Lead Time	50mm Code	75mm Code	100mm Code
Change of Level 75mm Step 150mm Rise	3-5 Working Days	9060	9063	9066
Change of Level 150mm Step 150mm Rise	3-5 Working Days	9061	9064	9067
Change of Level 225mm Step 150mm Rise	3-5 Working Days	9062	9065	9068
Change of Level 75mm Step 225mm Rise	3-5 Working Days	9070	9073	9076
Change of Level 150mm Step 225mm Rise	3-5 Working Days	9071	9074	9077
Change of Level 225mm Step 225mm Rise	3-5 Working Days	9072	9075	9078

DAMP PROOF COURSING

ACCESSORIES

STOPENDS

For sealing off the ends of the cavity tray at its start and finish.




9015

Product Description	Lead Time	50mm Code	75mm Code	100mm Code
Stop End Unit RH - Full Height 150mm Rise	3-5 Working Days	9010	9012	9014
Stop End Unit LH - Full Height 150mm Rise	3-5 Working Days	9011	9013	9015
Stop End Unit RH - 75mm Height (Sloping) 150mm Rise	3-5 Working Days	9045	9047	9049
Stop End Unit LH - 75mm Height (Sloping) 150mm Rise	3-5 Working Days	9046	9048	9050
Stop End Unit Multi - 75mm Height 150mm Rise	3-5 Working Days	9024	9024	9024
Stop End Unit RH - Full Height 225mm Rise	3-5 Working Days	9018	9020	9022
Stop End Unit LH - Full Height 225mm Rise	3-5 Working Days	9019	9021	9023
Stop End Unit RH - 75mm Height (Sloping) 225mm Rise	3-5 Working Days	9051	9053	9055
Stop End Unit LH - 75mm Height (Sloping) 225mm Rise	3-5 Working Days	9052	9054	9056
Stop End Unit Multi - 75mm Height 225mm Rise	3-5 Working Days	9024	9024	9024

UNIVERSAL 90° CORNER UNIT

For use where a cavity tray must turn the corner of a building.

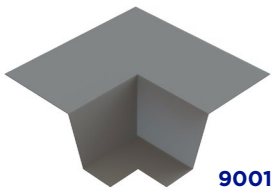

9001

Product Description	Lead Time	50mm Code	75mm Code	100mm Code
Corner Unit 150mm Rise	3-5 Working Days	9001	9002	9003
Corner Unit 225mm Rise	3-5 Working Days	9004	9005	9006


JOINT SUPPORTS

For fitting below lapped joints in the DPC to provide support and allow the jointing tape to be sealed correctly.



9028

Product Description	Lead Time	50mm Code	75mm Code	100mm Code
Joint Supports 150mm Rise	3-5 Working Days	9026	9027	9028
Joint Supports 225mm Rise	3-5 Working Days	9030	9031	9032



9060

CHANGE OF LEVEL UNITS

For use where the cavity tray steps up or down along its run.

Product Description	Lead Time	50mm Code	75mm Code	100mm Code
Change of Level 75mm Step 150mm Rise	3-5 Working Days	9060	9063	9066
Change of Level 150mm Step 150mm Rise	3-5 Working Days	9061	9064	9067
Change of Level 225mm Step 150mm Rise	3-5 Working Days	9062	9065	9068
Change of Level 75mm Step 225mm Rise	3-5 Working Days	9070	9073	9076
Change of Level 150mm Step 225mm Rise	3-5 Working Days	9071	9074	9077
Change of Level 225mm Step 225mm Rise	3-5 Working Days	9072	9075	9078

PRODUCT CODES

Product Code	Description	Pack Quantity	Lead Time	Page No.
1201	Telescopic Underfloor Vent 3-5 Courses	20	Next working day	4
1201XL	Telescopic Underfloor Vent 5-7 Courses	10	Next working day	4
1201ABBB	1201AB Plastic Airbrick - Blue Black	20	Next working day	4
1201ABBL	1201AB Plastic Airbrick - Black	20	Next working day	4
1201ABBR	1201AB Plastic Airbrick - Brown	20	Next working day	4
1201ABBU	1201AB Plastic Airbrick - Buff	20	Next working day	4
1201ABGR	1201AB Plastic Airbrick - Grey	20	Next working day	4
1201ABTE	1201AB Plastic Airbrick - Terracotta	20	Next working day	4
1201ABWH	1201AB Plastic Airbrick - White	20	Next working day	4
1203	Horizontal Front Extension	20	Next working day	5
1204	Vertical Extension Sleeve	20	Next working day	5
1205	Duct Adapter	1	Next working day	5
1206	Horizontal Rear Extension	1	Next working day	5
ZIN50	Invisiweep NC Non-Combustible Wall Weep	50	Next working day	6
IW50	Invisiweep Wall Weep - Blue Black	50	Next working day	6
IW50	Invisiweep Wall Weep - Black	50	Next working day	6
IW50	Invisiweep Wall Weep - Brown	50	Next working day	6
IW50	Invisiweep Wall Weep - Buff	50	Next working day	6
IW50	Invisiweep Wall Weep - Clear	50	Next working day	6
IW50	Invisiweep Wall Weep - Grey	50	Next working day	6
IW50	Invisiweep Wall Weep - Terracotta	50	Next working day	6
IW50	Invisiweep Wall Weep - White	50	Next working day	6
IW200	Invisiweep Wall Weep - Blue Black	200	Next working day	6
IW200	Invisiweep Wall Weep - Black	200	Next working day	6
IW200	Invisiweep Wall Weep - Brown	200	Next working day	6
IW200	Invisiweep Wall Weep - Buff	200	Next working day	6
IW200	Invisiweep Wall Weep - Clear	200	Next working day	6
IW200	Invisiweep Wall Weep - Grey	200	Next working day	6
IW200	Invisiweep Wall Weep - Terracotta	200	Next working day	6
IW200	Invisiweep Wall Weep - White	200	Next working day	6
1143	Cavity Wall Weep - Blue Black	50	Next working day	6
1143	Cavity Wall Weep - Black	50	Next working day	6
1143	Cavity Wall Weep - Brown	50	Next working day	6
1143	Cavity Wall Weep - Buff	50	Next working day	6
1143	Cavity Wall Weep - Clear	50	Next working day	6
1143	Cavity Wall Weep - Grey	50	Next working day	6
1143	Cavity Wall Weep - Terracotta	50	Next working day	6
1143	Cavity Wall Weep - White	50	Next working day	6
TH055	Rigid Top Hat - 55mm Diameter	1	3-5 working days	7
TH082	Rigid Top Hat - 82mm Diameter	1	3-5 working days	7
TH110	Rigid Top Hat - 110mm Diameter	1	Next working day	7
TH135	Rigid Top Hat - 135mm Diameter	1	3-5 working days	7
TH160	Rigid Top Hat - 160mm Diameter	1	3-5 working days	7
77110	Flexible Top Hat - 110mm Diameter	1	Next working day	7
77135	Flexible Top Hat - 135mm Diameter	1	Next working day	7
77120	Rigid Top Hat for 1201	1	Next working day	7
TST01	Gas Sleeve Tray for 1201	1	Next working day	7
JCLIP5	Jubilee Clip for TH055 & TH082	1	Next working day	7
JCLIP6	Jubilee Clip for TH110	1	Next working day	7
JCLIP7	Jubilee Clip for TH135 & TH160	1	Next working day	7
GTAPE01	Gastite Sealing Tape 15m x 100mm	1	Next working day	7
GTAPE02	Plastic Girth Tape 75m x 50mm	1	Next working day	7

Product Code	Description	Pack Quantity	Lead Time	Page No.
RSUMP01	Radon Sump	1	Next working day	8
TPT01	Threshold Internal Protection Tray	1	3-5 working days	8
TPTSP	Threshold Internal Protection Tray Special	1	3-5 working days	8
5101	Perimeter Cavity Tray 150mm Rise 50mm Width	1	3-5 working days	9
5102	Perimeter Cavity Tray 150mm Rise 75mm Width	1	3-5 working days	9
5103	Perimeter Cavity Tray 150mm Rise 100mm Width	1	3-5 working days	9
5104	Perimeter Cavity Tray 225mm Rise 50mm Width	1	3-5 working days	9
5105	Perimeter Cavity Tray 225mm Rise 75mm Width	1	3-5 working days	9
5106	Perimeter Cavity Tray 225mm Rise 100mm Width	1	3-5 working days	9
5110	External 90° Corner Tray 150mm Rise 50mm Width	1	3-5 working days	9
5112	External 90° Corner Tray 150mm Rise 75mm Width	1	3-5 working days	9
5114	External 90° Corner Tray 150mm Rise 100mm Width	1	3-5 working days	9
5111	Internal 90° Corner Tray 150mm Rise 50mm Width	1	3-5 working days	9
5113	Internal 90° Corner Tray 150mm Rise 75mm Width	1	3-5 working days	9
5115	Internal 90° Corner Tray 150mm Rise 100mm Width	1	3-5 working days	9
5116	External 90° Corner Tray 225mm Rise 50mm Width	1	3-5 working days	9
5118	External 90° Corner Tray 225mm Rise 75mm Width	1	3-5 working days	9
5120	External 90° Corner Tray 225mm Rise 100mm Width	1	3-5 working days	9
5117	Internal 90° Corner Tray 225mm Rise 50mm Width	1	3-5 working days	9
5119	Internal 90° Corner Tray 225mm Rise 75mm Width	1	3-5 working days	9
5121	Internal 90° Corner Tray 225mm Rise 100mm Width	1	3-5 working days	9
5123	Slab Perimeter 90° Corner Tray 225mm Rise	1	3-5 working days	9
5130	Stop End Right Hand 150mm Rise 50mm Width	1	3-5 working days	9
5132	Stop End Right Hand 150mm Rise 75mm Width	1	3-5 working days	9
5134	Stop End Right Hand 150mm Rise 100mm Width	1	3-5 working days	9
5131	Stop End Left Hand 150mm Rise 50mm Width	1	3-5 working days	9
5133	Stop End Left Hand 150mm Rise 75mm Width	1	3-5 working days	9
5135	Stop End Left Hand 150mm Rise 100mm Width	1	3-5 working days	9
5136	Stop End Right Hand 225mm Rise 50mm Width	1	3-5 working days	9
5138	Stop End Right Hand 225mm Rise 75mm Width	1	3-5 working days	9
5140	Stop End Right Hand 225mm Rise 100mm Width	1	3-5 working days	9
5137	Stop End Left Hand 225mm Rise 50mm Width	1	3-5 working days	9
5139	Stop End Left Hand 225mm Rise 75mm Width	1	3-5 working days	9
5141	Stop End Left Hand 225mm Rise 100mm Width	1	3-5 working days	9
9060	Change of Level 75mm 150mm Rise 50mm Width	1	3-5 working days	10
9063	Change of Level 75mm 150mm Rise 75mm Width	1	3-5 working days	10
9066	Change of Level 75mm 150mm Rise 100mm Width	1	3-5 working days	10
9061	Change of Level 150mm 150mm Rise 50mm Width	1	3-5 working days	10
9064	Change of Level 150mm 150mm Rise 75mm Width	1	3-5 working days	10
9067	Change of Level 150mm 150mm Rise 100mm Width	1	3-5 working days	10
9062	Change of Level 225mm 150mm Rise 50mm Width	1	3-5 working days	10
9065	Change of Level 225mm 150mm Rise 75mm Width	1	3-5 working days	10
9068	Change of Level 225mm 150mm Rise 100mm Width	1	3-5 working days	10
9070	Change of Level 75mm 225mm Rise 50mm Width	1	3-5 working days	10
9073	Change of Level 75mm 225mm Rise 75mm Width	1	3-5 working days	10
9076	Change of Level 75mm 225mm Rise 100mm Width	1	3-5 working days	10
9071	Change of Level 150mm 225mm Rise 50mm Width	1	3-5 working days	10
9074	Change of Level 150mm 225mm Rise 75mm Width	1	3-5 working days	10
9077	Change of Level 150mm 225mm Rise 100mm Width	1	3-5 working days	10
9072	Change of Level 225mm 225mm Rise 50mm Width	1	3-5 working days	10
9075	Change of Level 225mm 225mm Rise 75mm Width	1	3-5 working days	10
9078	Change of Level 225mm 225mm Rise 100mm Width	1	3-5 working days	10

Product Code	Description	Pack Quantity	Lead Time	Page No.
9010	Stop End Unit RH - Full Height 150mm Rise 50mm Width	1	3-5 working days	11
9012	Stop End Unit LH - Full Height 150mm Rise 50mm Width	1	3-5 working days	11
9014	Stop End Unit RH - Full Height 150mm Rise 75mm Width	1	3-5 working days	11
9011	Stop End Unit LH - Full Height 150mm Rise 75mm Width	1	3-5 working days	11
9013	Stop End Unit RH - Full Height 150mm Rise 100mm Width	1	3-5 working days	11
9015	Stop End Unit LH - Full Height 150mm Rise 100mm Width	1	3-5 working days	11
9045	Stop End Unit RH - 75mm Height (Sloping) 150mm Rise 50mm Width	1	3-5 working days	11
9047	Stop End Unit RH - 75mm Height (Sloping) 150mm Rise 75mm Width	1	3-5 working days	11
9049	Stop End Unit RH - 75mm Height (Sloping) 150mm Rise 100mm Width	1	3-5 working days	11
9046	Stop End Unit LH - 75mm Height (Sloping) 150mm Rise 50mm Width	1	3-5 working days	11
9048	Stop End Unit LH - 75mm Height (Sloping) 150mm Rise 75mm Width	1	3-5 working days	11
9050	Stop End Unit LH - 75mm Height (Sloping) 150mm Rise 100mm Width	1	3-5 working days	11
9024	Stop End Unit Multi - 75mm Height 150mm Rise	1	3-5 working days	11
9018	Stop End Unit RH - Full Height 225mm Rise 50mm Width	1	3-5 working days	11
9020	Stop End Unit RH - Full Height 225mm Rise 75mm Width	1	3-5 working days	11
9022	Stop End Unit RH - Full Height 225mm Rise 100mm Width	1	3-5 working days	11
9019	Stop End Unit LH - Full Height 225mm Rise 50mm Width	1	3-5 working days	11
9021	Stop End Unit LH - Full Height 225mm Rise 75mm Width	1	3-5 working days	11
9023	Stop End Unit LH - Full Height 225mm Rise 100mm Width	1	3-5 working days	11
9051	Stop End Unit RH - 75mm Height (Sloping) 225mm Rise 50mm Width	1	3-5 working days	11
9053	Stop End Unit RH - 75mm Height (Sloping) 225mm Rise 75mm Width	1	3-5 working days	11
9055	Stop End Unit RH - 75mm Height (Sloping) 225mm Rise 100mm Width	1	3-5 working days	11
9052	Stop End Unit LH - 75mm Height (Sloping) 225mm Rise 50mm Width	1	3-5 working days	11
9054	Stop End Unit LH - 75mm Height (Sloping) 225mm Rise 75mm Width	1	3-5 working days	11
9056	Stop End Unit LH - 75mm Height (Sloping) 225mm Rise 100mm Width	1	3-5 working days	11
9001	Universal 90° Corner Unit 150mm Rise 50mm Width	1	3-5 working days	11
9002	Universal 90° Corner Unit 150mm Rise 75mm Width	1	3-5 working days	11
9003	Universal 90° Corner Unit 150mm Rise 100mm Width	1	3-5 working days	11
9004	Universal 90° Corner Unit 225mm Rise 50mm Width	1	3-5 working days	11
9005	Universal 90° Corner Unit 225mm Rise 75mm Width	1	3-5 working days	11
9006	Universal 90° Corner Unit 225mm Rise 100mm Width	1	3-5 working days	11
9026	Joint Supports 150mm Rise 50mm Width	1	3-5 working days	12
9027	Joint Supports 150mm Rise 75mm Width	1	3-5 working days	12
9028	Joint Supports 150mm Rise 100mm Width	1	3-5 working days	12
9030	Joint Supports 225mm Rise 50mm Width	1	3-5 working days	12
9031	Joint Supports 225mm Rise 75mm Width	1	3-5 working days	12
9032	Joint Supports 225mm Rise 100mm Width	1	3-5 working days	12

LOW **CARRIAGE PAID** ORDER VALUES



£100
TO BRANCH

£150
TO SITE

CIVILS AND GROUNDWORKS

timloc
building products



Sales | Phone: **01405 765 567** Email: sales@timloc.co.uk Web: www.timloc.co.uk

Technical | Phone: **01405 782 769** Email: technical@timloc.co.uk Web: www.timloc.co.uk

Timloc Building Products | Timloc House, Ozone Park, Howden, East Yorkshire DN14 7SD
Civils & Groundworks - Edition 1