

Product Range

> Top 37



Insect



Disabled Access



Fire




Smoke



Light



Acoustic

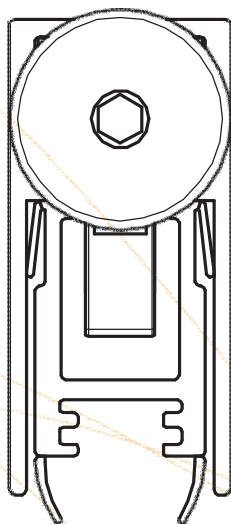

> Top 37

37dB
rated

APPLICATION: Pedestrian doorsets, single and double leaf configurations.

LENGTHS: 330 - 430 - 530 - 630 - 730 - 830 - 930
1030 - 1130 mm.

TRIMMING LENGTHS: 100 mm side opposite plunger.

FIXING TYPE: With preassembled self-tapping screws.

PLUNGER AND ADJUSTMENT TYPE:

- 1 Self-directing articulated metal plunger with nylon cap, adjustable with a 3 mm Allen wrench.
- 2 Nylon plunger for lock side operation, adjustable with a 3 mm Allen wrench.
- 3 Square section nylon plunger, adjustable with a 3 mm Allen wrench.
- 4 Steel plunger, adjustable with crosshead screwdriver, slotted screwdriver, and 6 mm spanner.

TECHNICAL CHARACTERISTICS:

- > Structural internal profile in self-extinguishing co-extruded PVC.
- > Graduated scissor action (seal drops on hinge side before lock side).
- > 14 mm maximum drop.
- > Galvanised steel fat springs and actuators in PA reinforced with 20% glassfibre.
- > External profile in 6060 T6 aluminium alloy.
- > Mechanism removable from hinge side after fixing.
- > Tested to 200,000 cycles.

