


Fixed Post 750mm Above Ground 48mm-90mm Diameter Galvanised with Plastic Cap






The Galvanised midl steel range of 750mm tall fixed posts are suitable for a range of applications. The round posts are available in 48mm, 60mm, 76mm and 90mm diameter tube.

The Fixed Post is available with extended legs for casting into concrete or a flange plate for bolting down and comes complete with a reflective Autopa logo.

Removable and colour coated versions also available.

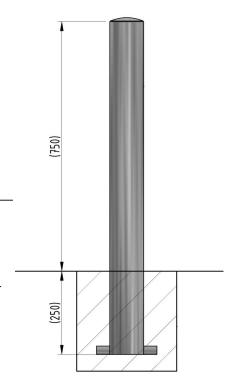

Part Number	Diameter and Fixing Detail
138 100 501	48mm (Concrete In)
138 100 401	48mm (Bolt Down)
138 100 205	60mm (Concrete In)
138 100 201	60mm (Bolt Down)
138 100 881	76mm (Concrete In)
138 100 885	76mm (Bolt Down)
138 100 351	90mm (Concrete In)
138 100 371	90mm (Bolt Down)
138 100 994	M12 Expanding Bolt (3 required per post)
138 100 993	M12 Foundation Bolt (3 required per post)
138 100 995	M12 Rawl Bolt (3 required per post)

Product details

- 750mm tall
- Cast in posts 250mm below ground

- · Colour coated options available extra
- · Reflective bands available

Installation & use

Bolt down Fixed Posts require bolting down to a suitable concrete surface (no less then 400mm3).

48mm- 114mm three M12 bolts, 139mm - 193mm four M16 bolts.

Concrete In Fixed Posts are supplied with welded fixing spikes to ensure firm ground anchorage.

Concrete In Fixed Posts require an excavated hole (no less than least 300mm deep) for installation.

This product is guaranteed for 12 months (if installed and used correctly).

www.autopa.co.uk

+44 (0)1788 550556



