


Fixed Post 750mm Above Ground 60mm - 114mm Diameter Stainless Steel

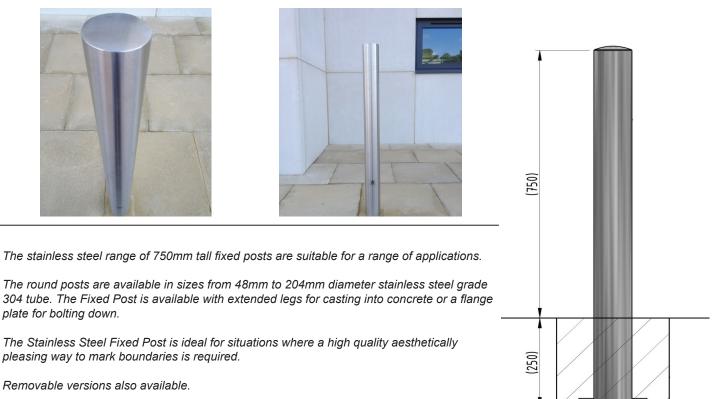

Part Number	Diameter and Fixing Detail
138 000 105	48mm (Concrete In)
138 000 101	48mm (Bolt Down)
138 000 115	60mm (Concrete In)
138 000 117	60mm (Bolt Down)
138 000 120	76mm (Concrete In)
138 000 121	76mm (Bolt Down)
138 000 125	89mm (Concrete In)
138 000 126	89mm (Bolt Down)
138 000 130	101mm (Concrete In)
138 000 131	101mm (Bolt Down)
138 000 135	114mm (Concrete In)
138 000 137	114mm (Bolt Down)

Product details

- 750mm tall
- Cast in posts 250mm below ground
- Reflective bands available

- Grade 316 versions available
- Larger diameter versions available

Installation & use

Bolt down Fixed Posts require bolting down to a suitable concrete surface (no less then 400mm3). 48mm - 114mm three M12 bolts, 139mm - 193mm three M16 bolts. Concrete In Fixed Posts are supplied with welded fixing spikes to ensure firm ground anchorage. Concrete In Fixed Posts require an excavated hole (no less than 300mm deep) for installing. This product is guaranteed for 12 months (if installed and used correctly).





bsi. 9001 Quality Management ISO 14001 Brwironmental Management Diso OHSAS 18001 Occupational Management

AUTOPA Limited Cottage Leap, Rugby, Warwickshire CV21 3XP

FM 31071 EMS 503166 OHS 55210