


Plain Square Bollard 1000mm Above Ground 50mm² - 100mm² Stainless Steel





AUTOPA's range of Plain Square Stainless Steel Bollards offers a simple and cost effective means of establishing control over parking and access. Plain Square Stainless Steel Bollards are ideal for use around pedestrian precincts, pavements, play and parking areas, as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders.

The complete range of Plain Square Stainless Steel Bollards are available in diameters from 50mm² to 150mm² in Grade 304 or Grade 316 and are available with extended legs for casting into concrete or with a flange plate for bolting down.

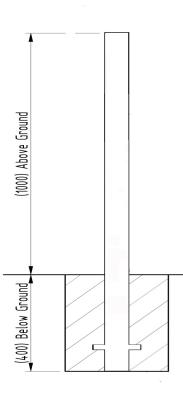

Colour coated and removable versions are also available.

Part Number	<u>Description</u>	Weight (kg)
138 125	50mm x 50mm (Concrete In)	kg
138 125	50mm x 50mm (Bolt Down)	kg
138 125	60mm x 60mm (Concrete In)	kg
138 125	60mm x 60mm (Bolt Down)	kg
138 125	70mm x 70mm (Concrete In)	kg
138 125	70mm x 70mm (Bolt Down)	kg
138 125 080	80mm x 80mm (Concrete In)	7.2kg
138 125	80mm x 80mm (Bolt Down)	kg
138 125	90mm x 90mm (Concrete In)	kg
138 125	90mm x 90mm (Bolt Down)	kg
138 125 100	100mm x 100mm (Concrete In)	9.0kg
138 125 096	100mm x 100mm (Bolt Down)	7.0kg

Product details

- 1000mm tall
- Concrete In bollards 400mm below ground

- Supplied with welded flat steel cap
- Reflective bands available

Installation & use

Concrete in bollards require an excavated hole (no less than 400mm3) for installation. Bolt down bollards require bolting to a suitable concrete surface (no less then 400mm3) by means of four M12 stainless steel bolts. AUTOPA recommends that bollards are placed no further than 1,200mm apart to ensure that no vehicle may pass between them. This product is guaranteed for 12 months (if installed and used correctly).





+44 (0)1788 550556