

# Schlüter®-KERDI-SHOWER-LT / -LTS

## Drainage

Sloped trays for linear drainage

# 8.8

Product data sheet


### Application and function

**Schlüter-KERDI-SHOWER-LT** is a sloped tray made of compression-resistant expanded polystyrene (EPS). It was developed for use with the matching linear drainage system Schlüter-KERDI-LINE (see product data sheet 8.7). The Schlüter-KERDI waterproofing membrane is laminated directly onto the shower tray, which has a sufficient surface slope. The sloped tray version without KERDI waterproofing is suitable for use as a sloped insulation board below screeds - preferably below Schlüter-BEKOTEC screed. The component is shipped as a folded unit for easier transport.

A sloped board is installed on both sides of a centrally/intermediate positioned linear drain or on one side of a linear drain positioned against the wall. For this purpose, a levelling layer made of screed or bound fill must be created on a load-bearing substrate in advance. The assembly height of the levelling layer has to match the corresponding shower board.

The installation of Schlüter-KERDI-LINE-V for vertical drainage enables low assembly heights from 24 mm.


Individual dimensions can be created by cutting the sloped board with a utility knife, using the pre-marked cutting grooves. Depending on the situation at the construction site, the sloped tray can be used with the corresponding, load-bearing substrates (e.g. wooden floors, vertical drain, mortar substrate etc.).

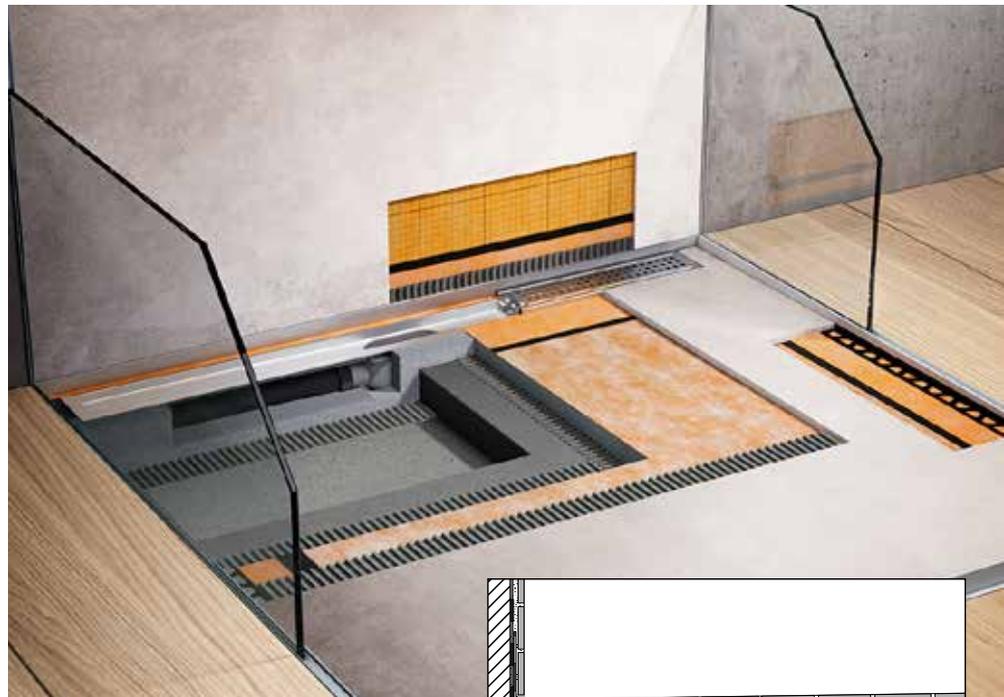


**The available base dimensions include:**  
(drainage is always situated on the first-listed side)

- 100 x 100 cm - wall installation
- 122 x 122 cm - wall installation
- 139.5 x 139.5 cm - wall installation
- 91.5 x 139.5 cm - wall installation
- 91.5 x 183 cm - wall installation
- 96.5 x 193 cm - wall installation
- 136.5 x 200 cm - wall installation
- 193 x 96.5 cm - wall installation


- 100 x 100 cm - intermediate installation
- 122 x 122 cm - intermediate installation
- 139.5 x 139.5 cm - intermediate installation

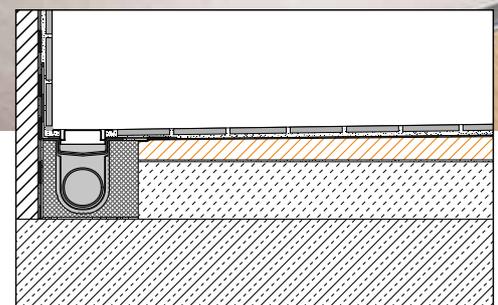


Schlüter®-KERDI-SHOWER-LTS with Schlüter®-KERDI-LINE-H, wall installation

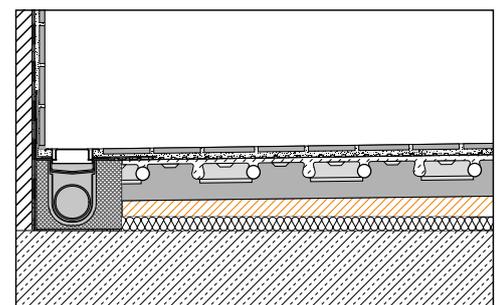


Alternative: Heatable BEKOTEC screed on Schlüter®-KERDI-SHOWER-BLS with Schlüter®-KERDI-LINE-H 50, wall installation

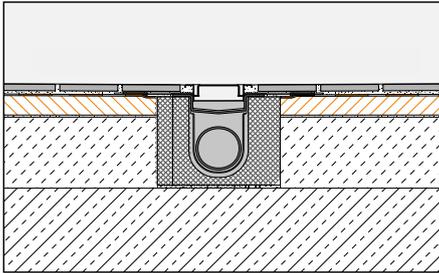


Schlüter®-KERDI-SHOWER-LT with  
Schlüter®-KERDI-LINE-H, intermediate installation

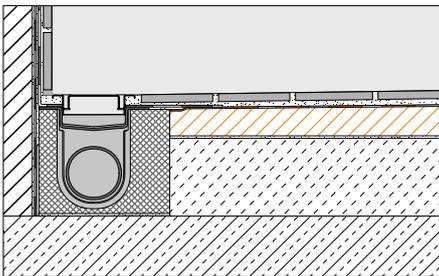


Schlüter®-KERDI-SHOWER-LTS with  
Schlüter®-KERDI-LINE-H, wall installation

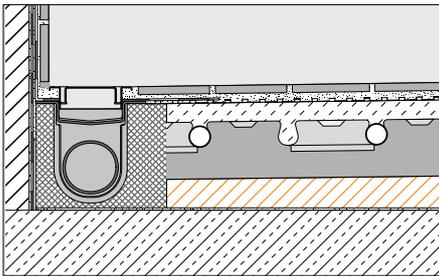

Schlüter®-KERDI-SHOWER-BSLs with  
Schlüter®-KERDI-LINE-H 40, wall installation

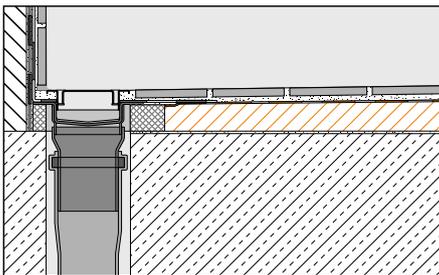

Schlüter®-KERDI-SHOWER-LTS with  
Schlüter®-KERDI-LINE-V 50 GSE, wall installation

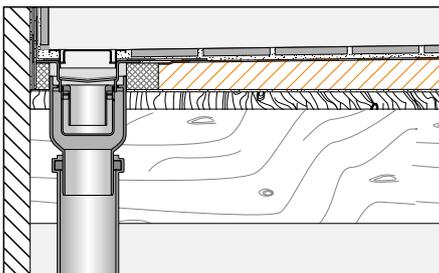

Schlüter®-KERDI-SHOWER-LTS with  
Schlüter®-KERDI-LINE-V 50 GE,  
wooden substrate - wall installation

## Material

Sloped tray made of compression-resistant expanded polystyrene (EPS). The Schlüter-KERDI waterproofing membrane is laminated on the surface of the sloped tray (except Schlüter-KERDI-SHOWER-BSL and -BSLS).

Schlüter-KERDI is a waterproofing membrane made of soft polyethylene with a special fleece fabric surface for effective anchoring in tile adhesive and other covering materials.

## Material properties and areas of application:

Schlüter-KERDI-SHOWER-L assemblies, in conjunction with the linear drainage KERDI-LINE, are classified as K3 according to BS EN 1253, Gullies for buildings. This class refers to areas without vehicle traffic, e.g. wetrooms in apartments, nursing homes, hotels, schools, and public wash-room and shower facilities. The floor area can withstand normal foot traffic, regardless of the tile dimensions. An additional load distribution layer or larger tile formats should be installed if higher traffic loads, e.g. from wheelchair use, are expected. The suitability of KERDI-SHOWER-L must be verified based on the anticipated chemical, mechanical and/or other stresses.

## Installation

For further details see product data sheet 8.7 Schlüter-KERDI-LINE.

1. To install KERDI-LINE-H with a horizontal drain and odour trap, start by precisely fitting the channel support and channel body. The components can be adhered with thin-bed tile adhesive, provided the substrate is level and height-adjusted.
2. Properly install the levelling layer (compressive strength  $\geq 0.5 \text{ N/mm}^2$ ) on the weight-bearing substrate. Make sure that the upper edge of the levelling layer is situated approx. 24 mm below the linear drainage. The levelling layer must be situated approx. 15 mm below the linear drainage with the installation of KSLT 1365/2000S.

If impact sound insulation is required, install suitable impact sound insulation underneath the levelling layer and KERDI-LINE-H (e.g. KERDI-LINE-SR) together with the corresponding edge strips.

3. To install the vertical linear drainage KERDI-LINE-V, adhere the sloped tray directly on a suitable substrate at the appropriate height.
4. Notch the sloped tray at the pre-marked cutting grooves with a utility knife, depending on the selected dimension of KERDI-LINE. Then embed the sloped tray fully in thin-bed tile adhesive to be flush with the KERDI-LINE channel support. Slide the small groove of the adjoining sloped tray surface laterally below the flange.
5. Now attach the KERDI collar that is pre-adhered at the linear drainage to the adjoining waterproofing of the sloped tray, using the sealing adhesive Schlüter-KERDI-COLL-L.
6. Tiles can be installed in the thin-bed method as soon the bonded waterproofing assembly has been completed (see also product data sheets 8.1 Schlüter-KERDI and 8.4 Schlüter-KERDI-COLL-L). No curing time is required.
7. To install the tiles, apply the dry setting thin-bed tile adhesive directly on the KERDI waterproofing membrane and then fully embed the tiles in the adhesive.

**Note:** Only system-certified thin-bed tile adhesives approved for KERDI may be used in areas where KERDI waterproofing assemblies must meet the requirements of national technical approval (abP) or CE conformity. Please contact us for further information about such adhesives.



8. Other coverings such as coatings, vinyl and similar materials can be installed in principle, but are not described in further detail here and may require additional clarification. Our Technical Department will be pleased to offer recommendations on request.

The sloped KERDI-SHOWER-BSL / -BSLS tray can also be used for sloped insulation. For this purpose, adjust it to the height of the adjoining insulation and apply the screed on top. We recommend installing a BEKOTEC screed, which is available in unheated versions or as the heated assembly BEKOTEC-THERM. If applicable, the shower area may have to be separated from the adjoining areas with an expansion joint.





**Product overview:**


**Wall installation**

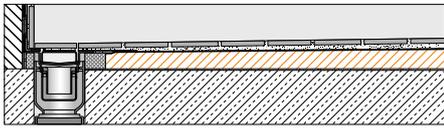

Schlüter®-KERDI-SHOWER-LTS, square BOARD

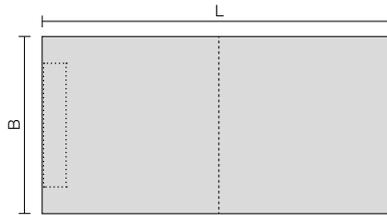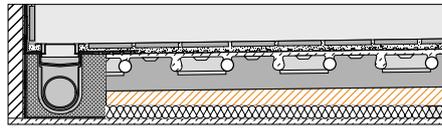

Schlüter®-KERDI-SHOWER-LTS, drain on the short side




Schlüter®-KERDI-SHOWER-LTS, drain on the long side

**Schlüter®-KERDI-SHOWER-LTS**

Assembly: sloped tray coated with Schlüter-KERDI, square


| L x B = cm    | H = mm |
|---------------|--------|
| 100 x 100     | 42     |
| 122 x 122     | 46     |
| 139.5 x 139.5 | 50     |

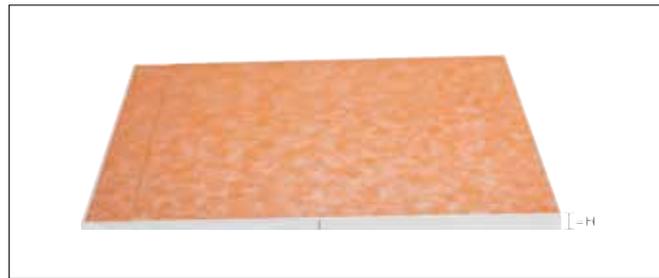

**Schlüter®-KERDI-SHOWER-LTS**

Assembly: sloped tray coated with Schlüter-KERDI, rectangular - drain on the short side B (2% slope)

| L x B = cm   | H = mm | Slope  |
|--------------|--------|--------|
| 139.5 x 91.5 | 50     | 2%     |
| 183 x 91.5   | 58     | 2%     |
| 193 x 96.5   | 60     | 2%     |
| 200 x 136.5  | 39     | 1.25 % |

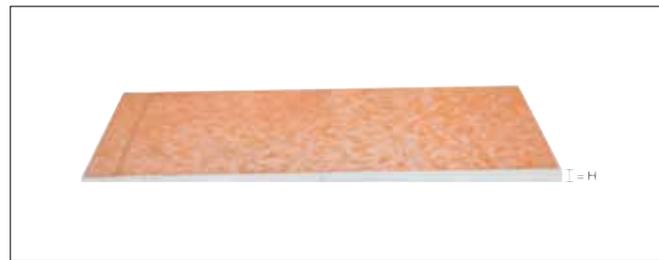

**Schlüter®-KERDI-SHOWER-LTS**

Assembly: sloped tray coated with Schlüter-KERDI, rectangular - drain on the long side B (2% slope)

| L x B = cm | H = mm |
|------------|--------|
| 96.5 x 193 | 41     |



**Schlüter®-KERDI-SHOWER-BSLS**

Assembly: uncoated sloped tray below BEKOTEC screed (2% slope)

| L x B = cm | H = mm |
|------------|--------|
| 100 x 100  | 42     |
| 140 x 140  | 50     |




**Centre installation**

**Schlüter®-KERDI-SHOWER-BSL**

Assembly: uncoated sloped tray below BEKOTEC screed (2% slope)

| L x B = cm | H = mm |
|------------|--------|
| 100 x 100  | 42     |
| 140 x 140  | 50     |

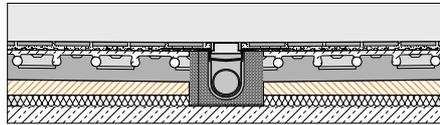


Schlüter®-KERDI-SHOWER-BSL with Schlüter®-KERDI-LINE-H 50, intermediate installation


**Schlüter®-KERDI-SHOWER-LT**

Assembly: sloped trays coated with Schlüter-KERDI for centre installation (2% slope)

| L x B = cm    | H = mm |
|---------------|--------|
| 100 x 100     | 32     |
| 122 x 122     | 34     |
| 139.5 x 139.5 | 36     |

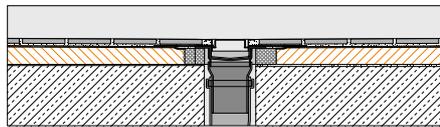

Schlüter®-KERDI-SHOWER-LT with Schlüter®-KERDI-LINE-V 50 GSE, intermediate installation



Schlüter®-KERDI-SHOWER-LT, intermediate drainage

**Text template for tenders:**

\_\_\_\_\_units Schlüter-KERDI-SHOWER-LT/-LTS as a floor-level sloped shower tray suitable for tiling, made of rigid expanded polystyrene foam and laminated with Schlüter-KERDI, for the linear drainage Schlüter KERDI-LINE as  
 ■ Schlüter KERDI-SHOWER-LTS, for wall installation with a given slope, in sizes:  
 ■ 100 x 100 cm  
 ■ 122 x 122 cm  
 ■ 139.5 x 139.5 cm  
 ■ 91.5 x 139.5 cm  
 ■ 91.5 x 183 cm  
 ■ 96.5 x 193 cm  
 ■ 136.5 x 200 cm  
 ■ 193 x 96.5 cm

\_\_\_\_\_units Schlüter-KERDI-SHOWER-LT/-LTS as a floor-level sloped shower tray suitable for tiling, made of rigid expanded polystyrene foam and laminated with Schlüter-KERDI, for the linear drainage Schlüter KERDI-LINE as  
 ■ Schlüter KERDI-SHOWER-LT, for intermediate installation with a given slope, in sizes:  
 ■ 100 x 100 cm  
 ■ 122 x 122 cm  
 ■ 139.5 x 139.5 cm  
 ... to be supplied and professionally adhered according to manufacturer's specifications.  
 Art.-No. \_\_\_\_\_  
 Material: \_\_\_\_\_ € / unit  
 Labour: \_\_\_\_\_ € / unit  
 Total: \_\_\_\_\_ € / unit

\_\_\_\_\_units Schlüter-KERDI-SHOWER-BSL/-BSLS sloped tray made of rigid expanded polystyrene foam for use below  
 ■ cement screed  
 ■ Schlüter-BEKOTEC-EN as  
 ■ Schlüter-KERDI-SHOWER-BSLS, (uncoated), for wall installation with a given slope  
 ■ Schlüter-KERDI-SHOWER-BSL, (uncoated), for intermediate installation with a given slope  
 in sizes:  
 ■ 100 x 100 cm  
 ■ 140 x 140 cm  
 ... to be supplied and professionally adhered according to manufacturer's specifications.  
 Art.-No. \_\_\_\_\_  
 Material: \_\_\_\_\_ € / unit  
 Labour: \_\_\_\_\_ € / unit  
 Total: \_\_\_\_\_ € / unit