

Schlüter®-LIPROTEC

Illustrated price list LT 21

Great Britain · Effective 1 April 2021



2021



SIMPLY INDIVIDUAL – Schlüter®-LIPROTEC

LED light and ceramics – a combination that keeps gaining fans. Schlüter-LIPROTEC makes it easier than ever to create individual light concepts with ceramic or natural stone surfaces. With the Schlüter-LIPROTEC-EASY and Schlüter-LIPROTEC-PRO series, we offer systems that are tailored to the skills of the installers.

Whilst the EASY series is a plug-and-play system that only requires limited expertise in light installation, the PRO series is designed for professional installers who have experience with light installation and wiring. And finally, Schlüter-LIPROTEC-PLAN provides all the information that professional (light) designers need to create and implement accent lighting with LIPROTEC.

EASY

Individual light installation made easy – due to convenient plug systems and easy mounting, the plug-and-play series provides solutions for every situation, even for installers who are not experts.

- Convenient plug systems
- Easy installation
- Ready for immediate use
- Large selection
- Plug & Play power supply units up to 100 W



FOR YOUR LIGHT PLANNING


Light data for LIPROTEC-EASY now available
on www.lumsearch.com – Keyword: "Fliese"

LUMsearch

DIALux

PLAN

In the PLAN section, planners, architects, lighting professionals and installers find all technical information at a glance. With this expertise, there are no limits to what light installations can be created with Schlüter-LIPROTEC products.



PRO

Lighting for professional installers – with the PRO series of Schlüter-LIPROTEC, turn any room into an oasis of light.


- Individual light installations
- Products with a multitude of combination options
- Limitless possibilities
- The series for professional installers

- Technical details
- Compact product overview
- Materials and surfaces
- Planning aids



AS VERSATILE AS THE LIGHT

Fascinate customers, turn visions of living spaces into reality, immersed in colour and the versatility of light. On the following page, you will find the solutions for the various application either as EASY (plug-and-play sets) or PRO (individually configurable).

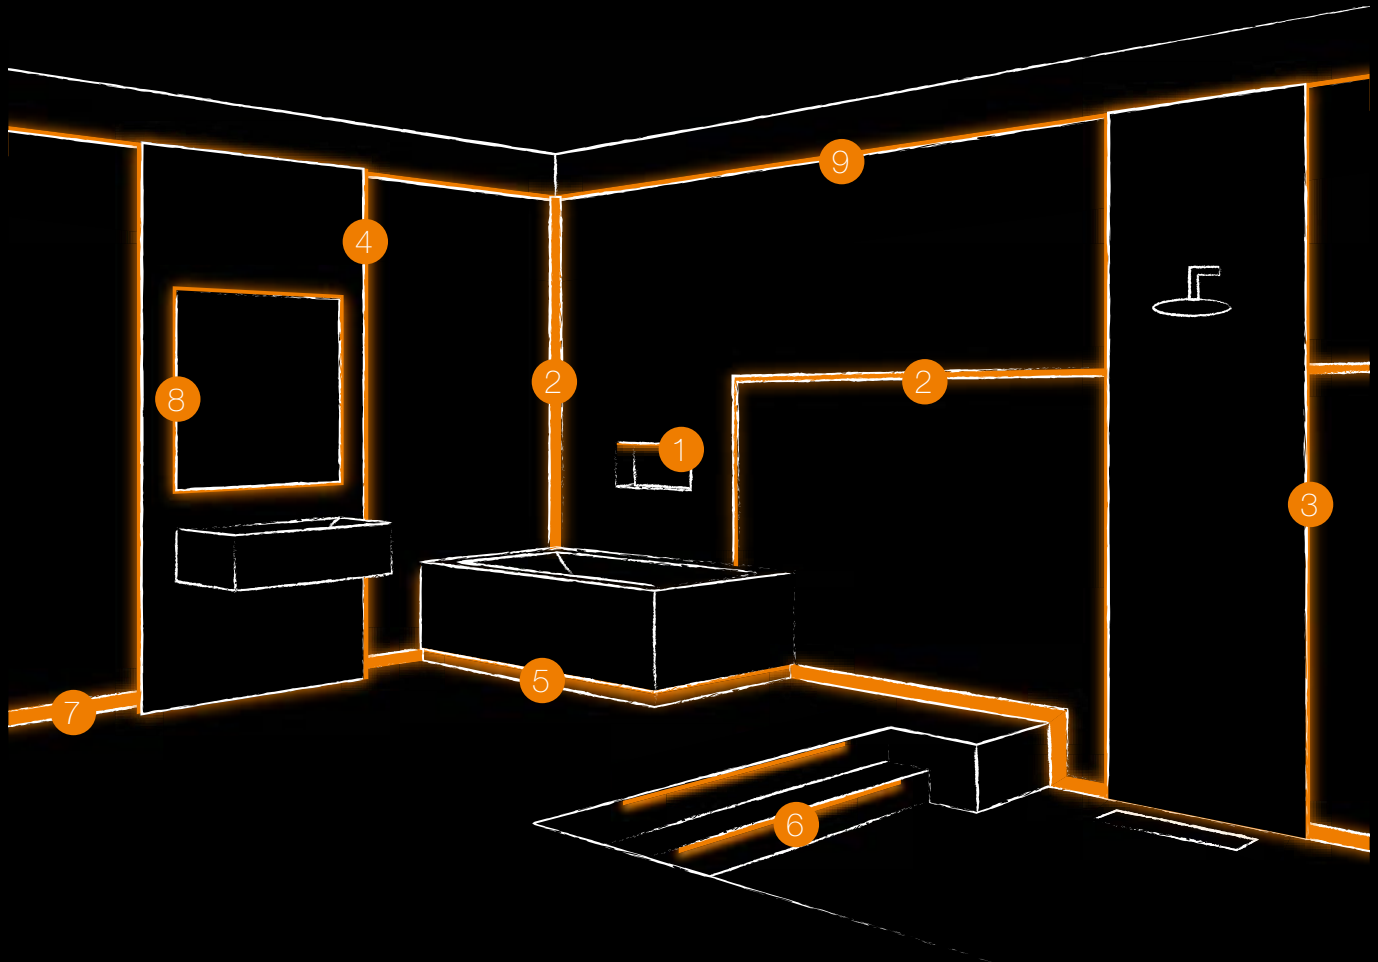

For technical information and properties, refer to the PLAN section starting on page 76.



		EASY		PRO
			Page	Page
1	NICHE			
	NLT – Niche, LED coloured + white, plug-and-play	SET	8	
	NLT-BR – Niche, LED coloured + white, plug-and-play compatible, including Bluetooth control	SET	10	
2	LINEAR LIGHT			
	LLPM – Linear light, plug-and-play LED module, coloured + white	MODULE	12	
	LLP – Linear light, plug-and-play LED module, coloured	MODULE	14	
	LLPE – Linear light, plug-and-play LED module, wall corner, coloured	MODULE	16	
	LL – Linear light, coloured + white			24
	LLE – Linear light, wall corner, coloured + white			28
3	SHOWER			
	LLPM – Linear light, plug-and-play LED module, coloured + white	MODULE	12	
	LLP – Linear light, plug-and-play LED module, coloured	MODULE	14	
	LLPE – Linear light, plug-and-play LED module, wall corner, coloured	MODULE	16	
	LL – Linear light, coloured + white			24
	LLE – Linear light, wall corner, coloured + white			28
	WS – Wall panel lighting, coloured + white			32
	WSK – Wall panel lighting with cable duct, coloured + white	SET		36/60
	WSQ – Wall panel lighting with QUADDEC finishing profile, coloured + white			40
4	WALL PANEL			
	WS – Wall panel lighting, coloured + white			32
	WSK – Wall panel lighting with cable duct, coloured + white	SET		36/60
	WSQ – Wall panel lighting with QUADDEC finishing profile, coloured + white			40
5	BATHTUB			
	LLPM – Linear light, plug-and-play LED module, coloured + white	MODULE	12	
	WS – Wall panel lighting, coloured + white			32
	WSK – Wall panel lighting with cable duct, coloured + white	SET		36/60
6	STAIRCASE			
	PB – Stair edge lighting, white	SET		44/62
7	BASEBOARD			
	DESIGNBASE-QD – Landing/border profile, white			48
	VB – Skirting/cove lighting			52
8	MIRROR			
	LLPM – Linear light, plug-and-play LED module, coloured + white	MODULE	12	
	LLP – Linear light, plug-and-play LED module, coloured	MODULE	14	
	D – Receptacle profile for mirror and other decors	SET		56/64
	WS – Wall panel lighting, coloured + white			32
	WSK – Wall panel lighting with cable duct, coloured + white	SET		36/60
9	LIGHTING COVE			
	WS – Wall panel lighting, coloured + white			32
	WSK – Wall panel lighting with cable duct, coloured + white	SET		36/60
	VB – Skirting/cove lighting			52



EASY

Schlüter-LIPROTEC-LLP/-LLPM/-LLPE are LED modules consisting of a flexible, fully encased LED strip with homogenous light dispersion and a carrier profile made of aluminium or brushed stainless steel V4A. The LED modules are available either with a fixed white-light colour temperature of 3000 K or 4900 K, or with a RGB+W colour range. The latter makes it possible to choose from more than 16 million hues and colour temperatures from 2500 K – 6500 K.

The robust carrier profile enables applications in areas with exposure to water and vapour, from an installation height of 11 mm. It can be used on walls and ceilings as well as in shower areas. In light traffic indoor areas, the LED modules can even be installed in the floor area. For use in protected outdoor areas and pool landscapes, we recommend using our Schlüter-LIPROTEC-LLPM LED modules with V4A brushed stainless steel profiles.

The LED modules are available as plug-and-play versions in different lengths. Our LED strip can simply be shortened at the marked cutting points and sealed with the supplied end caps to maintain its IP degree of protection. The LED modules can be integrated into a system using cable connections and Y-switches, depending on the light characteristics. Power supply units and the Bluetooth control required for the RGB+W system are also available as plug-and-play versions, which makes installation easier. You can find additional accessories such as cable connections, distributors and wall boxes with sealing function in the accessories section.



SETS

Page

NLT – Niche, LED coloured + white, plug-and-play	SET	8
NLT-BR – Niche, LED coloured + white, plug-and-play compatible, including Bluetooth control	SET	10
LLPM – Linear light, plug-and-play LED module, coloured + white	MODULE	12
LLP – Linear light, plug-and-play LED module, coloured	MODULE	14
LLPE – Linear light, plug-and-play LED module, wall corner, coloured	MODULE	16

CONTROL

Bluetooth	18/19
-----------	-------

ACCESSORIES

Power supply units	20
Cables / distributors	20/21
Additional accessories	21

LEGEND

Explanations of properties / areas of application	99
---	----

For technical information and properties, refer to the PLAN section starting on page 76.



FIND OUT MORE AT:

WWW.LIPROTEC.CO.UK




Schlüter®-KERDI-BOARD-NLT



Schlüter-KERDI-BOARD-NLT are prefabricated niche sets made of KERDI-BOARD with plug-and-play LIPROTEC-LED technology. They are used to create illuminated niches and storage surfaces for wall areas. These niches can be integrated into the Schlüter-KERDI waterproofing system as a bonded waterproofing assembly. The niches are available in different dimensions and lighting options. The rectangular niches are available with illumination either on the long or the narrow side. The LED module can either be positioned at the front edge, in the centre or at the rear wall that is to be tiled. The scope of supply includes all components required for the installation, as well as the cable connection, power supply and sealing collar. We recommend using a standard light switch for convenience. A Bluetooth control for RGB+W lighting has to be ordered separately and can be found on page 19.

(Product data sheet 12.2)

PLUG-AND-PLAY NICHE SETS WW / NW / RGB+W

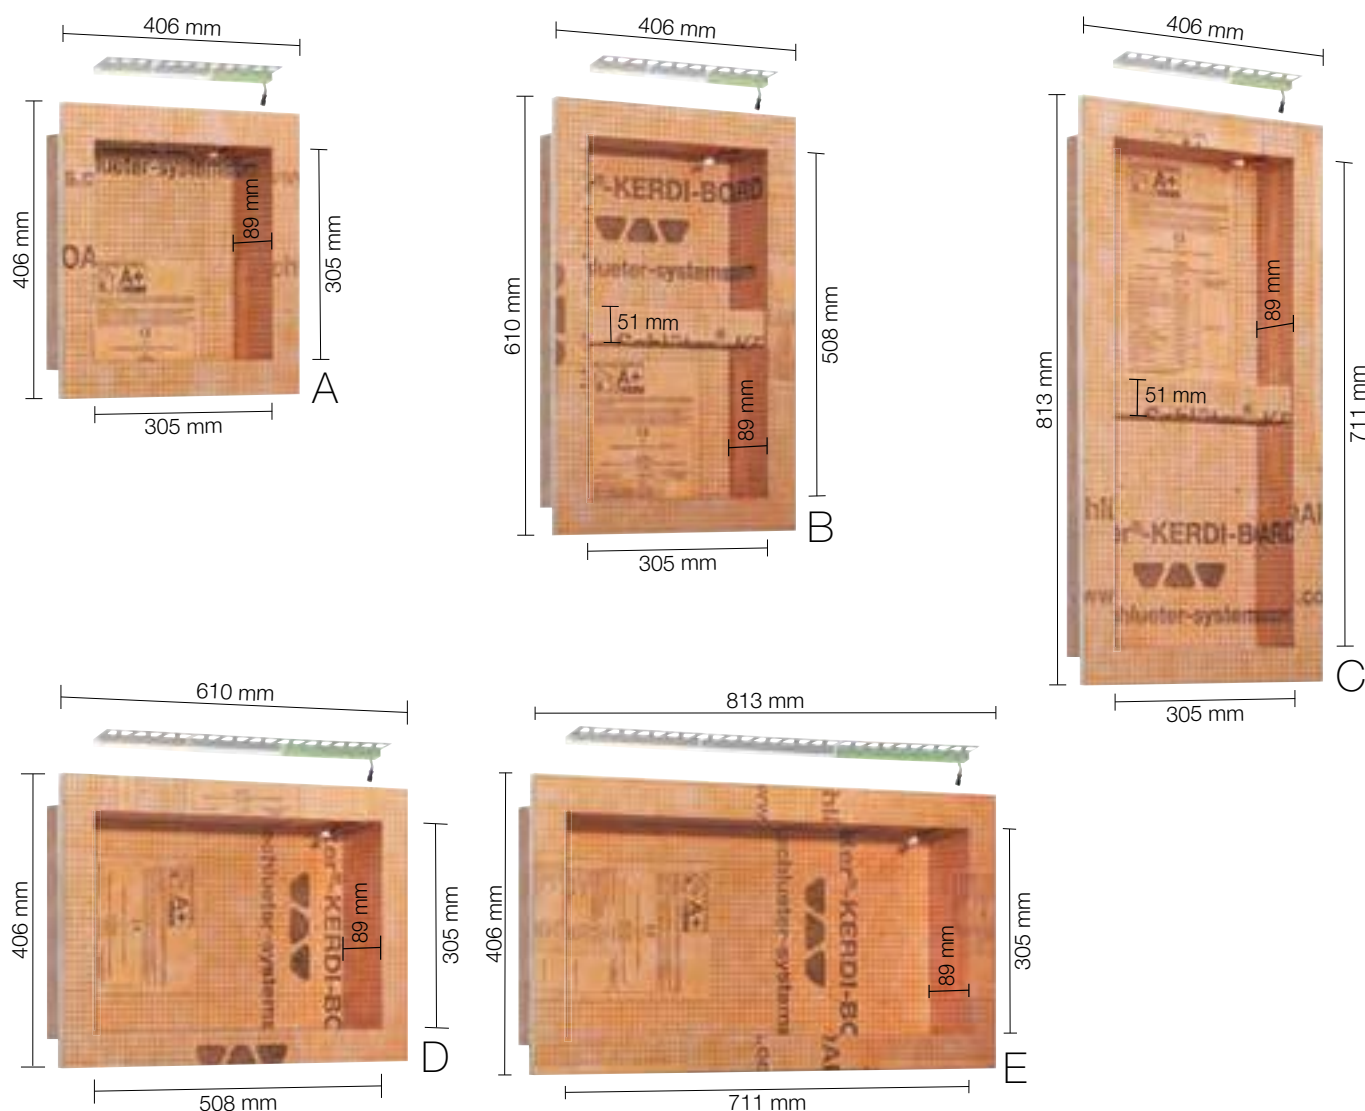

SET INCLUDES:



i
Bluetooth control also available separately!

For explanations of the symbols, refer to page 99.




PREFABRICATED NICHE WITH PLUG-AND-PLAY LED ILLUMINATION

	B x H x T (mm)	Type of light	Art. No.	£ / Set	PL (Set)
A	305 x 305 x 89	warm white	KB 12 NL TP1 AE 1	227.75	20
		neutral white	KB 12 NL TP1 AE 2	227.75	20
		RGB+white	KB 12 NL TP1 AE 9	256.22	20
B	305 x 508 x 89	warm white	KB 12 NL TP2 AE 1	256.22	20
		neutral white	KB 12 NL TP2 AE 2	256.22	20
		RGB+white	KB 12 NL TP2 AE 9	284.68	20
C	305 x 711 x 89	warm white	KB 12 NL TP3 AE 1	294.17	20
		neutral white	KB 12 NL TP3 AE 2	294.17	20
		RGB+white	KB 12 NL TP3 AE 9	322.64	20
D	508 x 305 x 89	warm white	KB 12 NL TP4 AE 1	279.94	20
		neutral white	KB 12 NL TP4 AE 2	279.94	20
		RGB+white	KB 12 NL TP4 AE 9	294.17	20
E	711 x 305 x 89	warm white	KB 12 NL TP5 AE 1	341.62	20
		neutral white	KB 12 NL TP5 AE 2	341.62	20
		RGB+white	KB 12 NL TP5 AE 9	355.86	20

Note: The dimensions represent interior clearance dimensions. The first length specification is the illuminated length.

APPLICATION AREAS



TECHNICAL DATA OF THE INCLUDED LED MODULES

NLT 9 (RGB+white)	
Dimensions of LED (B x H)	17 x 14.5 mm
Rated output (W/Unit)	See table on page 78
Number of LED (u./m)	112
Colour temperature (Kelvin)	RGB+W (2700 K)
CRI	90
Included power supply	230 V, 15 W
Included cable	3 m

NLT 1 (warm white)	
Dimensions of LED (B x H)	12 x 10.5 mm
Rated output (W/Unit)	See table on page 78
Number of LED (u./m)	280
Colour temperature (Kelvin)	3000 K
CRI	92
Included power supply	230 V, 15 W
Included cable	3 m

NLT 2 (neutral white)	
Dimensions of LED (B x H)	12 x 10.5 mm
Rated output (W/Unit)	See table on page 78
Number of LED (u./m)	280
Colour temperature (Kelvin)	4900 K
CRI	92
Included power supply	230 V, 15 W
Included cable	3 m



Schlüter®-KERDI-BOARD-NLT-BR



Schlüter-KERDI-BOARD-NLT-BR are prefabricated niche sets made of KERDI-BOARD with plug-and-play LIPROTEC-LED RGB+W technology and with Bluetooth/wireless receivers. The various light colours can be selected either via the supplied radio remote control or via suitable Bluetooth-compatible smartphones or tablets. They are used to create illuminated niches and storage surfaces for wall areas. These niches can be integrated into the Schlüter-KERDI waterproofing system as a bonded waterproofing assembly.

The niches are available in different dimensions. The rectangular niches are available with illumination either on the long or the narrow side. The RGB+W LED module can either be positioned at the front edge, centre or at the rear wall that is to be tiled. The scope of supply includes all components required for the installation, such as the cable connection, receiver, power supply and sealing collar. We recommend using a standard light switch for convenience. A detailed description of the Bluetooth control for RGB+W lighting can be found on page 19.

(Product data sheet 12.2)



SET INCLUDES:



Note: The different niche variants can be seen on page 8.

i
New – now including
Bluetooth receiver and
remote control

For explanations of the symbols, refer to page 99.

PREFABRICATED NICHE WITH PLUG-AND-PLAY LED ILLUMINATION



	B x H x T (mm)	Type of light	Art. No.	£ / Set	PL (Set)
A	305 x 305 x 89	RGB+white	KB 12 NL TP1 AE 9 BR	422.74	20
B	305 x 508 x 89	RGB+white	KB 12 NL TP2 AE 9 BR	451.24	20
C	305 x 711 x 89	RGB+white	KB 12 NL TP3 AE 9 BR	489.24	20
D	508 x 305 x 89	RGB+white	KB 12 NL TP4 AE 9 BR	460.74	20
E	711 x 305 x 89	RGB+white	KB 12 NL TP5 AE 9 BR	522.49	20

Note: The dimensions represent interior clearance dimensions. The first length specification is the illuminated length.

TECHNICAL DATA OF THE INCLUDED LED MODULES

NLT 9 BR (RGB+W)	
Dimensions of LED (B x H)	17 x 14.5 mm
Rated output (W/Unit)	See table on page 78
Number of LED (u./m)	112
Colour temperature (Kelvin)	RGB+W (2700 K)
CRI	90
Included power supply	230 V, 15 W
Included cable	3 m

i
Detailed technical information about Schlüter-KERDI-BOARD-NLT / -NLT-BR can be found on pages 78/79.

TECHNICAL DATA OF THE INCLUDED BLUETOOTH CONTROL

LT PEBR 4	
Max. range	10 m
Input voltage	24 V, DC
Max. total load in the LIPROTEC system	90 W
Max. length LED strips	6 m
Degree of protection	IP63
Ambient temperature	-20 °C to +50 °C





Schlüter®-LIPROTEC-LLPM




Schlüter-LIPROTEC-LLPM are plug-and-play LED modules consisting of a fully encased LED strip with homogenous light dispersion and a carrier profile made of aluminium or brushed stainless steel V4A with trapezoid perforated anchoring leg. The LED modules are available either with a fixed white-light colour temperature of 3000 K or 4900 K, or with a RGB+W colour range. The latter makes it possible to choose from more than 16 million hues and colour temperatures from 2500 K – 6500 K. The white LED module is available with an installation height of 11 mm, which means it can be installed flush with the tile thickness.


(Product data sheet 15.8)

DIALux LUMsearch

PLUG & PLAY LED MODULE WW / NW

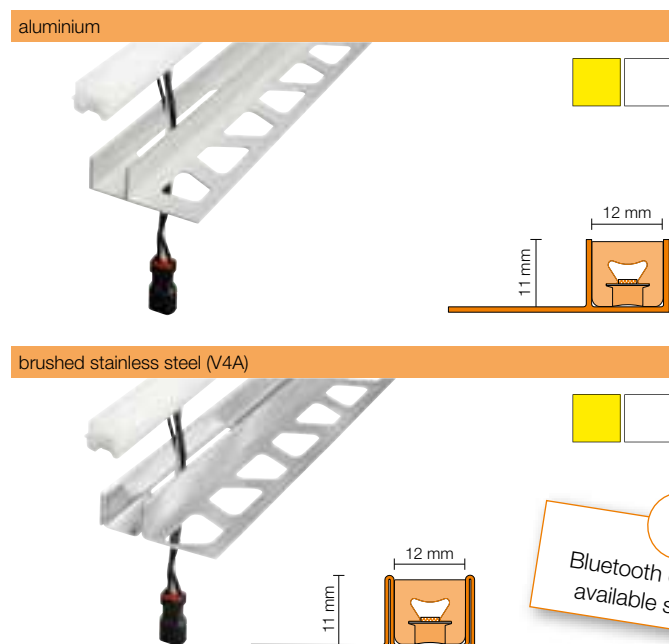

PLUG-AND-PLAY LED MODULE RGB+W

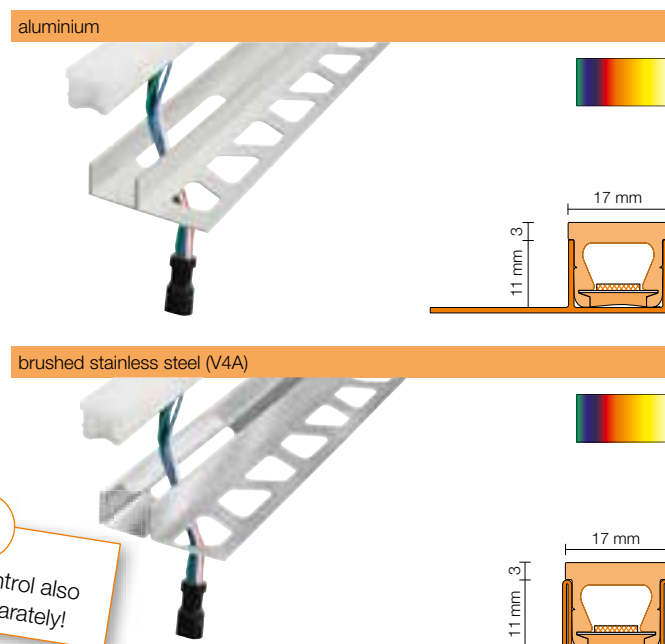

Note: End caps incl. sealing compound for shortening the LED strip are included in the set. On the RGB+W version, the LED strip protrudes approx. 3 mm from the profile. Only the LED module with white light is suitable for use on the floor in domestic applications.

TECHNICAL DATA OF THE INCLUDED LED MODULES

LLPM 9 (RGB+W)	
Dimensions of LED (B x H)	17 x 14.5 mm
Rated output (W/m)	15
Number of LED (u./m)	112
Colour temperature (Kelvin)	RGB+W (2700 K)
CRI	90

Can be shortened every 62.5 mm

LLPM 1 (warm white)	
Dimensions of LED (B x H)	12 x 10.5 mm
Rated output (W/m)	5
Number of LED (u./m)	280
Colour temperature (Kelvin)	3000 K
CRI	92

Can be shortened every 25 mm

LLPM 2 (neutral white)	
Dimensions of LED (B x H)	12 x 10.5 mm
Rated output (W/m)	5
Number of LED (u./m)	280
Colour temperature (Kelvin)	4900 K
CRI	92

Can be shortened every 25 mm

END CAPS

Schlüter-LIPROTEC-LLPM/EK are end caps for proper termination of the LED plug-and-play sets. They can be used as left or right end. The holding bar is embedded into the tile adhesive.



Schlüter®-LIPROTEC-LLPM/EK				
end cap, anodised aluminium				
B (mm)	Art. No.	£ / U.	P (Unit)	
12	EK/LLP 110 AE 12	4.18	50	
15	EK/LLP 110 AE 15	4.18	50	



Schlüter®-LIPROTEC-LLPM/EK				
end cap, brushed stainless steel (V4A)				
B (mm)	Art. No.	£ / U.	P (Unit)	
12	EK/LLP 110 V4A 12	4.18	50	
15	EK/LLP 110 V4A 15	4.18	50	

Note: B = 12 mm (LED module, white) / B = 15 mm (LED module, RGB+W)

For explanations of the symbols, refer to page 99.



PLUG-AND-PLAY LED MODULES ALUMINIUM

Material	L (cm)	Type of light	Art. No.	£ / m	P (Unit)
aluminium	50	warm white	LLP 110 AE 1/50	151.83	10
		neutral white	LLP 110 AE 2/50	151.83	10
		RGB+white	LLP 110 AE 9/50	170.81	10
	100	warm white	LLP 110 AE 1/100	132.85	10
		neutral white	LLP 110 AE 2/100	132.85	10
		RGB+white	LLP 110 AE 9/100	151.83	10
	200	warm white	LLP 110 AE 1/200	109.13	10
		neutral white	LLP 110 AE 2/200	109.13	10
		RGB+white	LLP 110 AE 9/200	128.11	10
	250	warm white	LLP 110 AE 1	99.64	10
		neutral white	LLP 110 AE 2	99.64	10
		RGB+white	LLP 110 AE 9	118.62	10

Exact lengths: 50.5 cm, 100.2 cm, 200 cm and 250 cm




PLUG-AND-PLAY LED MODULES BRUSHED STAINLESS STEEL

Material	L (cm)	Type of light	Art. No.	£ / m	P (Unit)
stainless steel (V4A)	50	warm white	LLP 110 V4A 1/50	166.07	10
		neutral white	LLP 110 V4A 2/50	166.07	10
		RGB+white	LLP 110 V4A 9/50	185.04	10
	100	warm white	LLP 110 V4A 1/100	147.09	10
		neutral white	LLP 110 V4A 2/100	147.09	10
		RGB+white	LLP 110 V4A 9/100	166.07	10
	200	warm white	LLP 110 V4A 1/200	123.36	10
		neutral white	LLP 110 V4A 2/200	123.36	10
		RGB+white	LLP 110 V4A 9/200	142.34	10
	250	warm white	LLP 110 V4A 1	113.87	10
		neutral white	LLP 110 V4A 2	113.87	10
		RGB+white	LLP 110 V4A 9	132.85	10

Exact lengths: 50.5 cm, 100.2 cm, 200 cm and 250 cm

APPLICATION AREAS

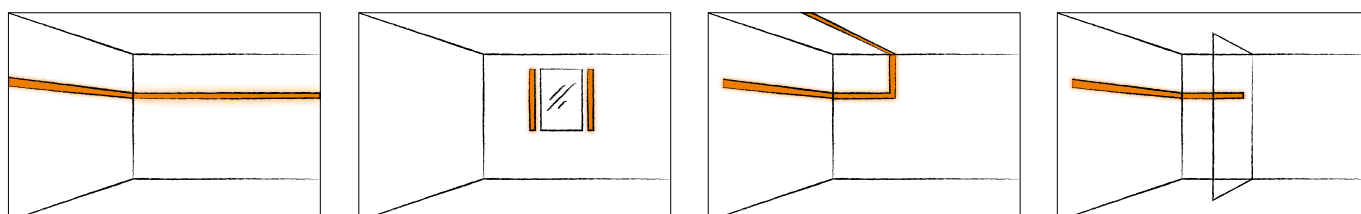



Schlüter®-LIPROTEC-LLP




Schlüter-LIPROTEC-LLP are LED modules consisting of a fully encased LED strip with homogenous light dispersion and a U-shaped carrier profile made of aluminium. With the LED modules, coloured RGB+W light strips with more than 16 million different hues and colour temperatures of 2500 K – 6500 K can be created. The carrier profile with an installation height of 17 mm makes flush installation possible.

(Product data sheet 15.8)


DIALux LUMsearch

PLUG-AND-PLAY LED MODULE RGB+W

aluminium



i
Bluetooth control also
available separately!



Note: End caps incl. sealing compound for shortening the LED strip are included in the set.

TECHNICAL DATA OF THE INCLUDED LED MODULES

LLP 9 (RGB+W)	
Dimensions of LED (B x H)	17 x 14.5 mm
Rated output (W/m)	15
Number of LED (u./m)	112
Colour temperature (Kelvin)	RGB+W (2700 K)
CRI	90

Can be shortened every 62.5 mm

Note: max. length of aligned LED modules in the LIPROTEC-EASY system: 6 m

END CAP



Schlüter®-LIPROTEC-WS/EK

end cap anodised aluminium,
indirect illumination

H (mm)	Art. No.	£ / U.	P (Unit)
17	EK / LT WS I AE 20	12.35	50

For explanations of the symbols, refer to page 99.




PLUG-AND-PLAY LED MODULES *ALUMINIUM*

Material	L (cm)	Type of light	Art. No.	£ / m	P (Unit)
aluminium	50	RGB+white	LLP 2017 AE 9/50	199.28	10
	100	RGB+white	LLP 2017 AE 9/100	170.81	10
	200	RGB+white	LLP 2017 AE 9/200	142.34	10
	250	RGB+white	LLP 2017 AE 9	132.85	10

Exact lengths: 50.5 cm, 100.2 cm, 200 cm and 250 cm

APPLICATION AREAS

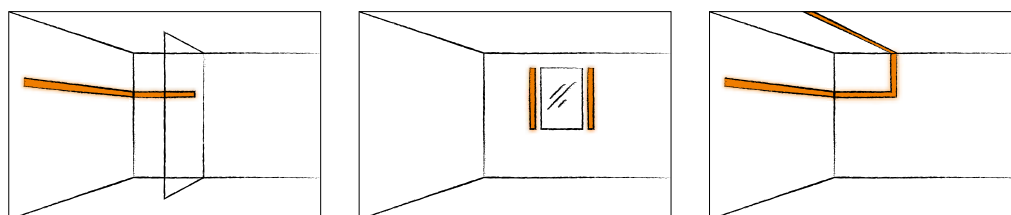



Schlüter®-LIPROTEC-LLPE




Schlüter-LIPROTEC-LLPE are LED modules consisting of a fully encased LED strip with homogenous light dispersion and a carrier profile made of anodised aluminium. The LED module with RGB+W coloured light range makes it possible to choose from more than 16 million different hues and colour temperatures from 2500 K – 6500 K. With the LED module, accent lighting can be created at wall corners. It is suitable for use in internal and external corners in the shower, preferably positioned vertically.
(Product data sheet 15.8)


DIALux LUMsearch

PLUG-AND-PLAY LED MODULE RGB+W

aluminium



i
Bluetooth control also
available separately!



Note: End caps incl. sealing compound for shortening the LED strip are included in the set.

TECHNICAL DATA OF THE INCLUDED LED MODULES

LLPE 9 (RGB+W)	
Dimensions of LED (B x H)	17 x 14.5 mm
Rated output (W/m)	15
Number of LED (u./m)	112
Colour temperature (Kelvin)	RGB+W (2700 K)
CRI	90

Can be shortened every 62.5 mm

Note: max. length of aligned LED modules in the LIPROTEC-EASY system: 6 m

END CAP



Schlüter®-LIPROTEC-LLE/EK

end cap, anodised aluminium

Art. No.	£ / U.	P (Unit)
EK / LT LLE / AE	11.07	50


For explanations of the symbols, refer to page 99.



PLUG-AND-PLAY LED MODULES ALUMINIUM

Material	L (cm)	Type of light	Art. No.	£ / m	P (Unit)
aluminium	250	RGB+white	LL EP 4016 AE 9	137.60	10

APPLICATION AREAS

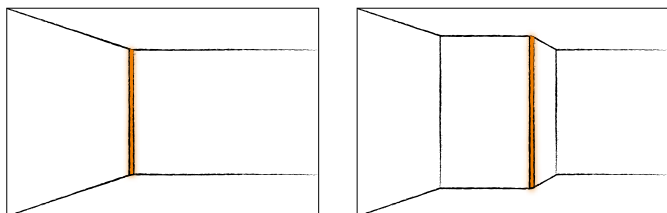




Plug-and-play accessories


The plug-and-play system significantly simplifies combining the individual components. The schematic diagrams show a selection of combination options. Configure your individual light solution in the desired light hue. The respective system limits have to be taken into account.



LED MODULES WW / NW

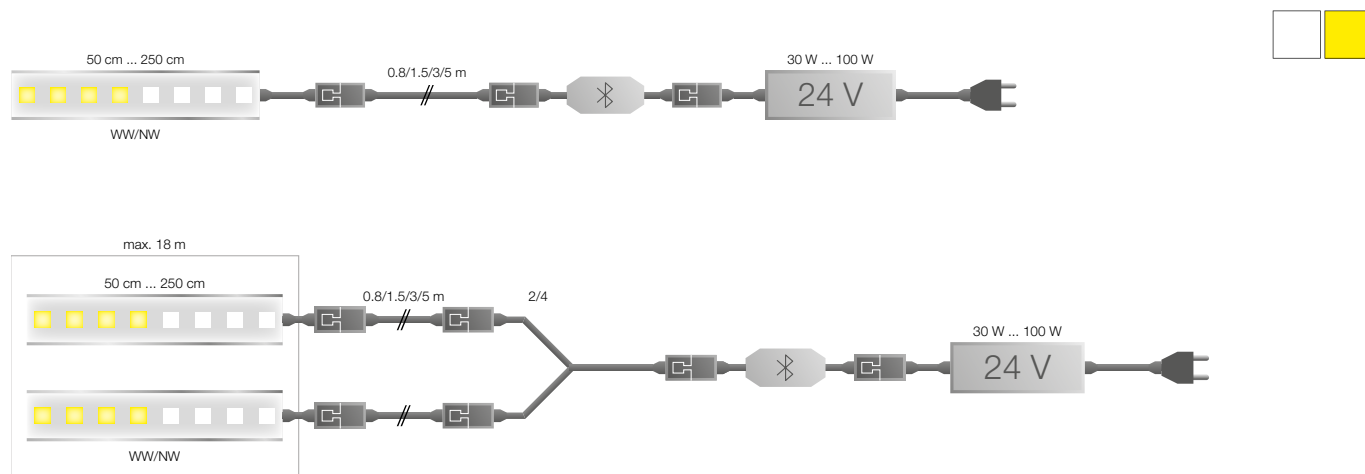


LED MODULES RGB+W

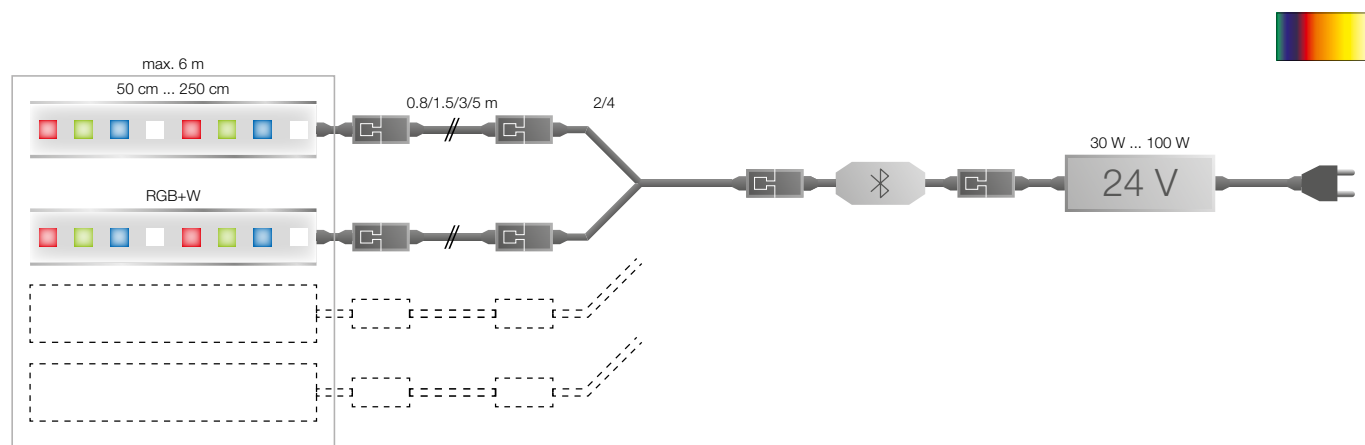

CONTROL

Schlüter-LIPROTEC-PEBR 1 is a Bluetooth/wireless receiver for controlling up to 18 m of white LED modules using the included radio remote control or via Bluetooth on smartphones or tablets. The receiver is operated via Bluetooth by means of the Schlüter-LED-Colour-Control app, which is downloadable for free for both Android and iOS devices. Various dimmed luminous intensities can be saved as favourites in the app software and controlled via a mobile end device and the included remote control. Up to two end devices can be simultaneously coupled with the receiver. The very compact dimensions of the receiver enable space-saving installation. We recommend using a standard light switch for convenience.



Schlüter®-LIPROTEC-PEBR 1 		
plug-and-play Bluetooth receiver incl. remote control		
Art. No.	£ / U.	P (Unit)
LT PEBR 1	163.87	10

Schlüter-LIPROTEC-PEBR 4 is a plug-and-play Bluetooth/radio receiver for controlling up to 6 m of RGB+W LED modules using the included radio remote control or via Bluetooth on smartphones or tablets. The receiver is operated via Bluetooth by means of the Schlüter-LED-Colour-Control app, which is downloadable for free for both Android and iOS devices. Up to two end devices can be simultaneously coupled with the receiver. In excess of 16 million colours and white tones with variable colour temperatures can be set with the RGB+W LED modules. A preselection of white and coloured hues is possible, these can be stored as favourites in the app. 42 different colour sequences are preprogrammed and can be played at variable speeds. The very compact dimensions of the Bluetooth receiver enable space-saving installation. We recommend using a standard light switch for convenience.



Schlüter®-LIPROTEC-PEBR 4		
plug-and-play Bluetooth receiver incl. remote control		
Art. No.	£ / U.	P (Unit)
LT PEBR 4	166.07	10

TECHNICAL DATA OF THE INCLUDED BLUETOOTH CONTROL

LT PEBR 1	
Max. range	10 m
Input voltage	24 V, DC
Max. total load in the LIPROTEC system	90 W
Max. length LED strips	18 m
Degree of protection	IP63
Ambient temperature	-20 °C to +50 °C


LT PEBR 4	
Max. range	10 m
Input voltage	24 V, DC
Max. total load in the LIPROTEC system	90 W
Max. length LED strips	6 m
Degree of protection	IP63
Ambient temperature	-20 °C to +50 °C





POWER SUPPLY UNITS

Power supply units convert the mains voltage to the 24 V required by the LED strips. They are easy to install and available in different wattages from 30 to 100 W for LED strips up to 6/18 linear metres. They are equipped with a connection cable with Euro plug, as well as plug-and-play connectors for the Schlüter-LIPROTEC-EASY system.

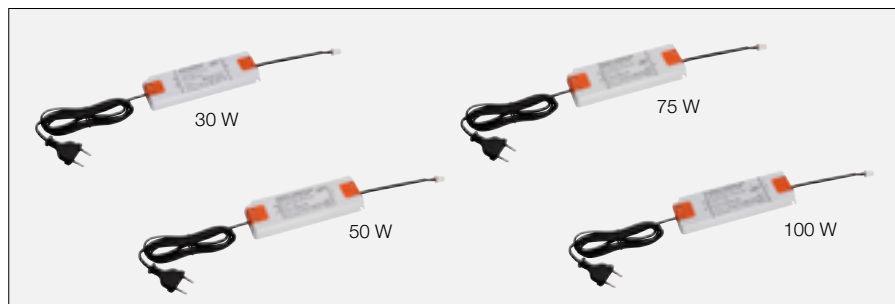

Schlüter®-LIPROTEC-PEKE

plug-and-play power supply, 24 V DC, with Euro plug-and-play connector

Watt	Max. Watt*	Art. No.	£ / U.	P (Unit)
30	27	LT PEKE 24V 30W	64.53	10
50	45	LT PEKE 24V 50W	79.72	10
75	67.5	LT PEKE 24V 75W	104.38	10
100	90	LT PEKE 24V 100W	146.14	10

* A safety reserve has to be taken into account when selecting the power supply unit (see maximum load of the corresponding power supply unit).

Note: The dimensions of the power supplies can be found on page 71.



CABLE

Schlüter-LIPROTEC-PZK is a plug-and-play cable, available in varying lengths, for connecting the power supply unit or Bluetooth receiver and the plug-and-play LED module.



Schlüter®-LIPROTEC-PZK


plug-and-play cables

L (cm)	Art. No.	£ / U.	P (Unit)
 80	LT PZK / 80	15.67	10
 150	LT PZK / 150	16.96	10
300	LT PZK 3M	19.92	10
500	LT PZK 5M	23.72	10

Note: The max. combined cable lengths should not exceed 10 m.

DISTRIBUTOR

Schlüter-LIPROTEC-PZV is a plug-and-play distributor for connecting 2 or 4 additional plug-and-play LED modules to an installation.

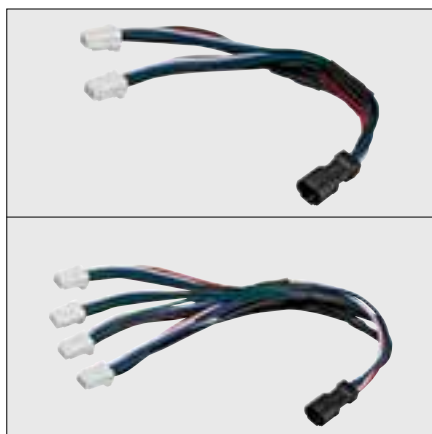

Schlüter®-LIPROTEC-PZV


plug-and-play distributor

Closing	Art. No.	£ / U.	P (Unit)
2	LT PZV 2	19.45	10
4	LT PZV 4	29.41	10

ADAPTER


Schlüter-LIPROTEC-PZA is an adapter cable for connecting Schlüter-LIPROTEC-EASY plug-and-play components and Schlüter-LIPROTEC-PRO components. The adapter can also be used to integrate LED modules into a standard electrical installation. This connection must only be carried out by a qualified electrician. The clamping options illustrated schematically on page 95 must be observed.




Schlüter®-LIPROTEC-PZA 			
plug-and-play adapter cable			
L (cm)	Art. No.	£ / U.	P (Unit)
100	LT PZA / 100	15.77	10

ADDITIONAL ACCESSORIES

Schlüter-LIPROTEC-PZH is a hollow wall junction box with pre-adhered Schlüter-KERDI sealing collar for use in waterproofing assemblies with tile coverings (e.g. in shower areas). It creates a hollow space for plug connections to reversibly install the plug-and-play LED modules, and is attached with suitable adhesive or with Schlüter-KERDI-COLL-L.



Schlüter®-LIPROTEC-PZH			
plug-and-play hollow-wall box			
B x H x T (mm)	Art. No.	£ / U.	P (Set)
235 x 140 x 19	LT PZ HD 25	20.88	10

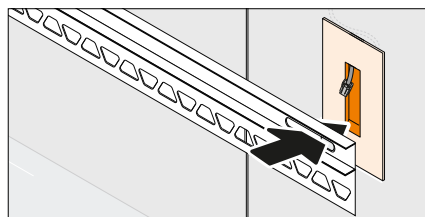

Schlüter-PROCUT-PSF is a special cutting tool for precisely cutting LED tubes to size. To ensure that the LED strip retains IP-compliant tightness when it is shortened, it has to be cut at a 45° angle and sealed with the end caps and sealing adhesive included in the set.



Schlüter®-PROCUT-PSF			
profile cutter, joint spacer			
Art. No.	£ / U.	P (Unit)	
PSF	57.27	10	






PRO

With the plug-and-play sets from the EASY section, you can create a variety of individual light installations with ceramics and natural stone. But Schlüter-LIPROTEC offers a lot more. On the following pages, in the PRO section, you can combine profiles, LED strips, diffuser lenses, control equipment and accessories for individual projects.

On page 4 and 5, you can find an orientation aid for identifying which profile is suitable for which application.

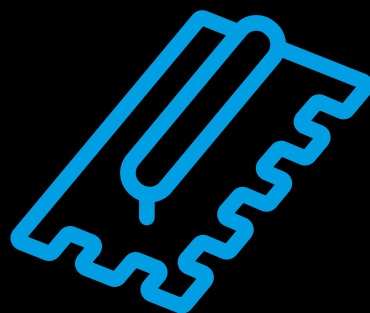

PROFILES

	Page
LL – Linear light, coloured + white	24
LLE – Linear light, wall corner, coloured + white	28
WS – Wall panel lighting, coloured + white	32
WSK – Wall panel lighting with cable duct, coloured + white	SET 36/60
WSQ – Wall panel lighting with QUADEC finishing profile, coloured + white	40
PB – Stair edge lighting, white	SET 44/62
DESIGNBASE-QD – Landing/border profile, white	48
VB – Skirting/cove lighting	52
D – Carrier profile for mirror and other decors	SET 56/64

CONTROL

Bluetooth	68
Radio control	70
Radio master & slave	72

ACCESSORIES

Power supply units	71
Installation material	74

LEGEND

Explanations of properties / areas of application	99
---	----







FIND OUT MORE AT:

WWW.LIPROTEC.CO.UK



Schlüter®-LIPROTEC-LL

You can create a wide variety of individual, linear accent lighting with Schlüter-LIPROTEC-LL. With its discreet, U-formed section, LIPROTEC-LL is suitable for many different installation situations in new buildings and with renovations.

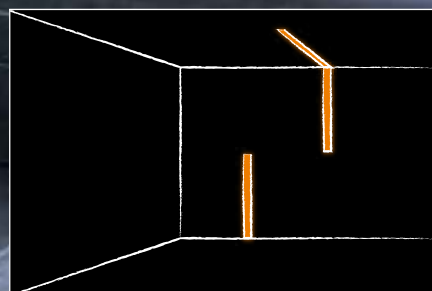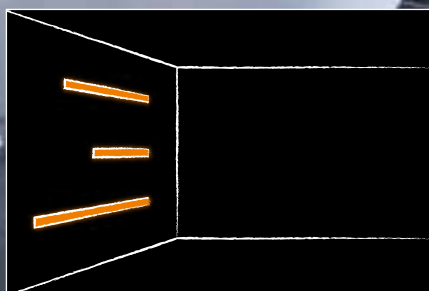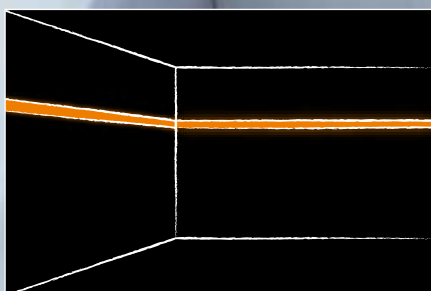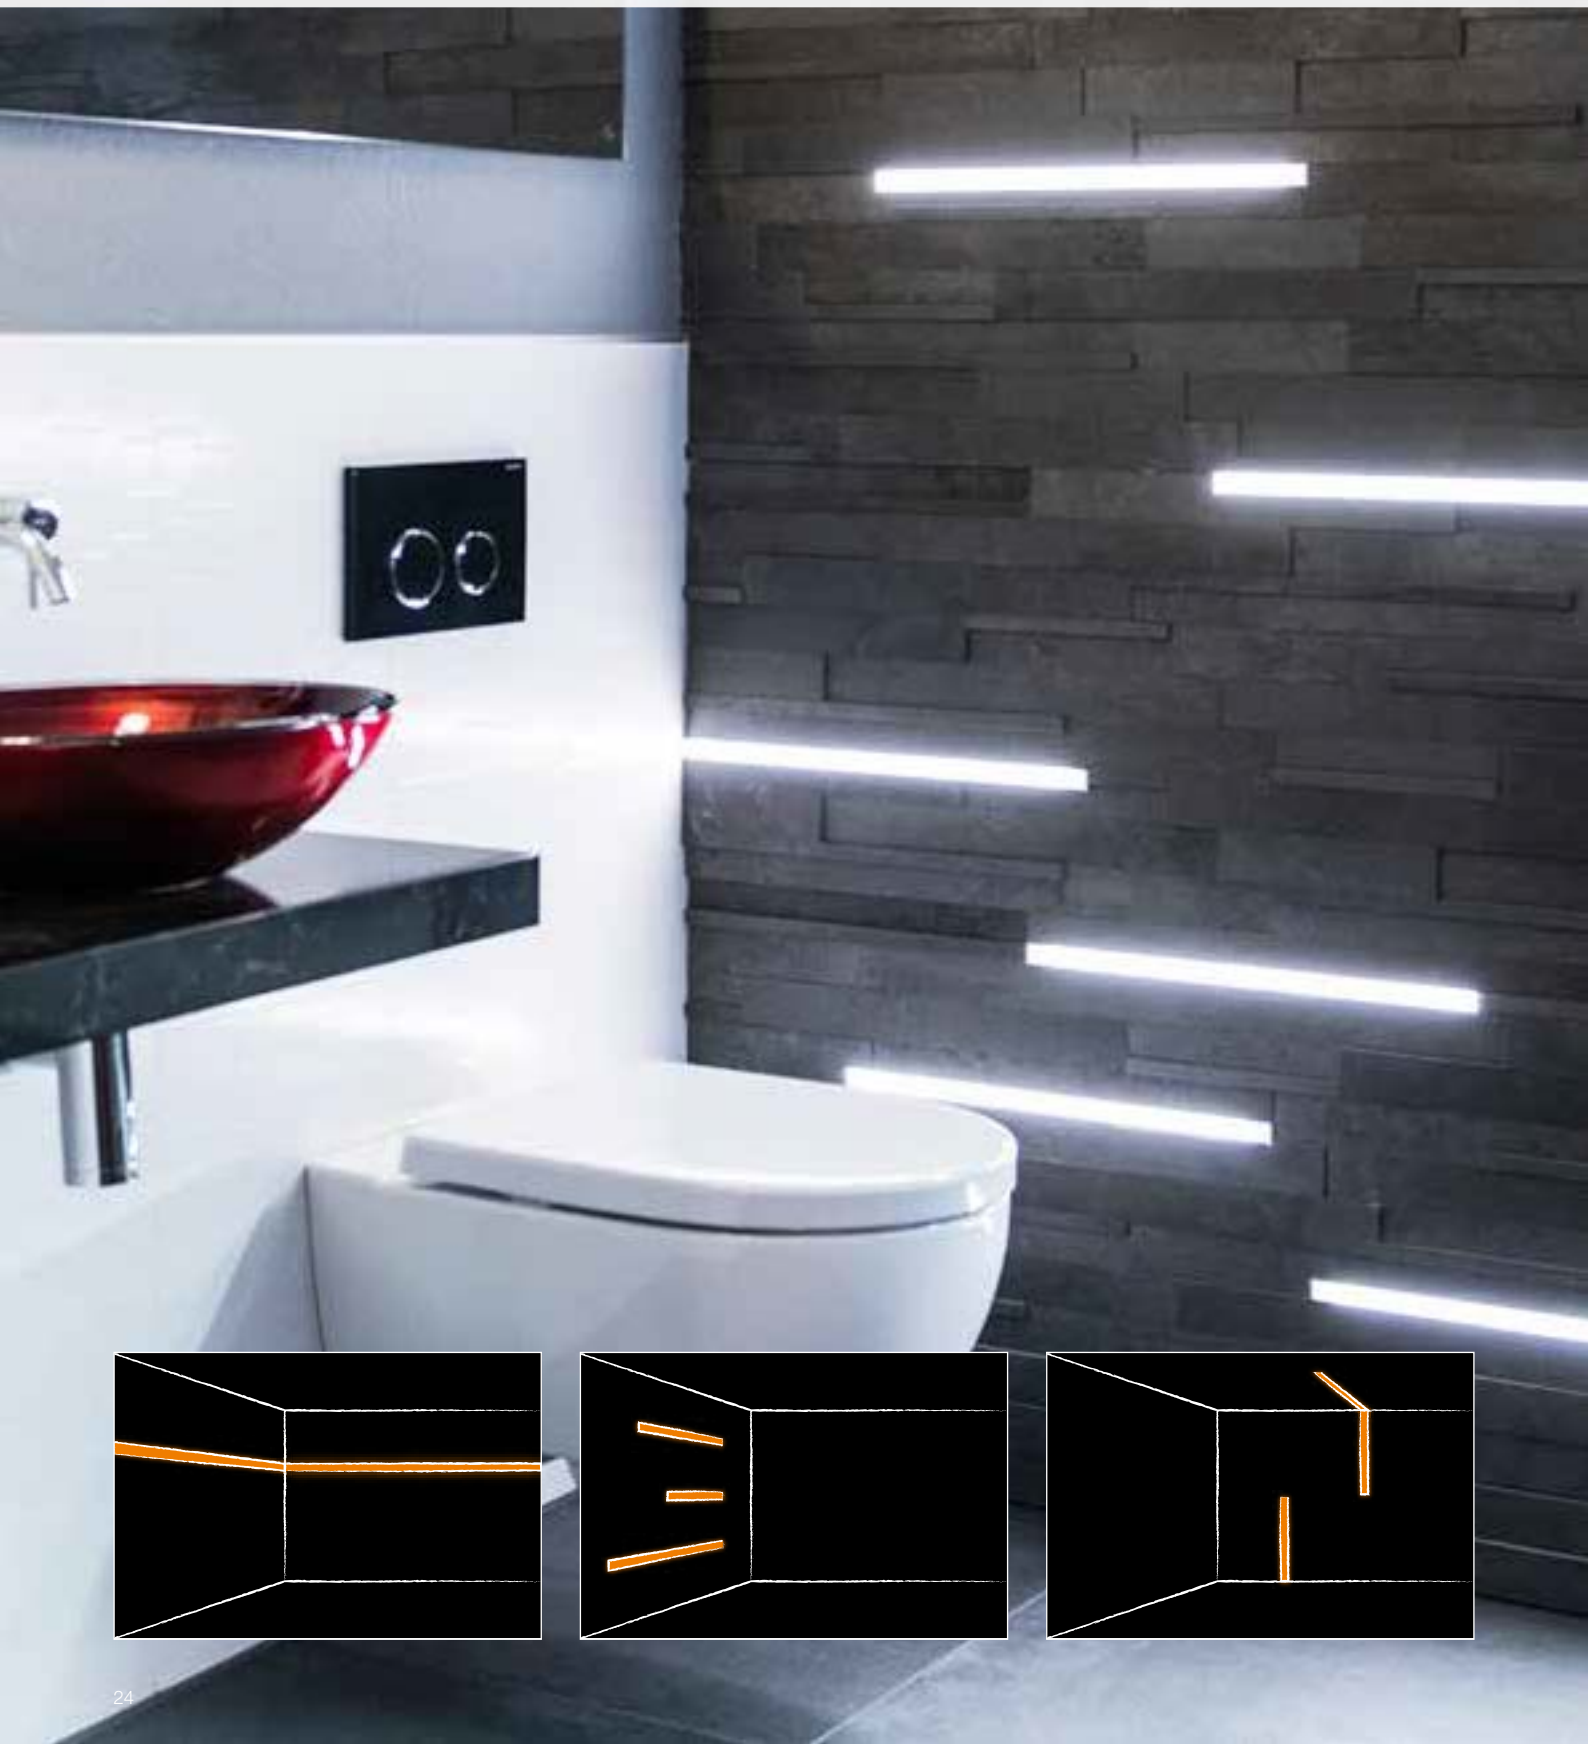



For explanations of the symbols, refer to page 99.

A real multi-talent!

Schlüter-LIPROTEC-LL is a high-quality, anodised aluminium carrier profile for creating accent lighting in wall coverings and ceilings. The illumination is provided by Schlüter-LIPROTEC-ES LED strips laid into the U-shaped profile, in combination with the corresponding diffuser lens. Various direct or indirect light effects are created according to the positioning of the profile.



(Product data sheet 15.5)

Application areas:

- ✓ Linear light borders
- ✓ Illuminated borders in wall coverings
- ✓ Illuminated niche constructions



- 1 Schlüter-LIPROTEC-LL profile
- 2 LED strip
- 3 diffuser lens (direct illumination)

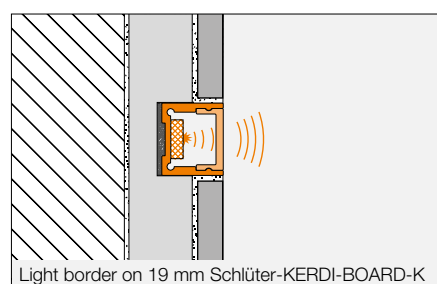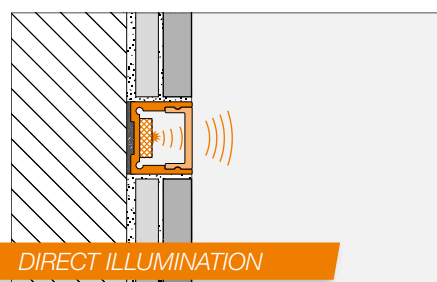


Note: Only suitable for vertical installation in the shower. For horizontal installation, we recommend our LED module LIPROTEC-LLPM on page 12.



Schlüter®-LIPROTEC-LL


PROFILES

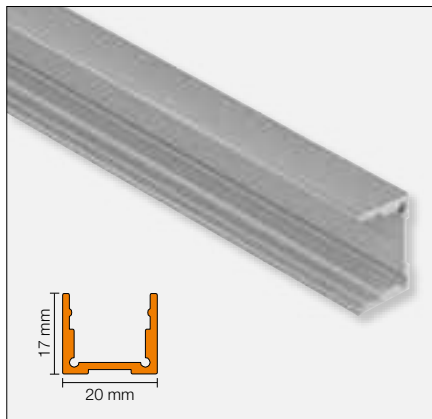

Schlüter®-LIPROTEC-LL


anodised aluminium

L (m)	Art. No.	£ / m	KV (Unit)
2.5	LT LL 2017 AE	18.95	60

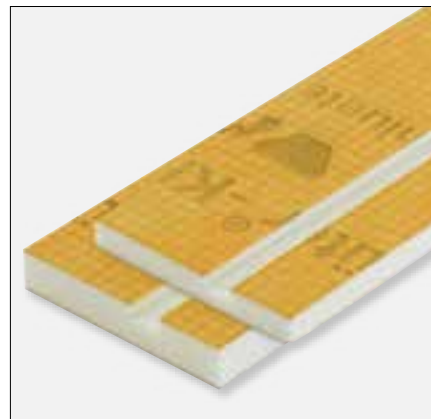

For simplified installation, we recommend our Schlüter-KERDI-BOARD-K installation modules on page 75.

DIFFUSER LENS



Schlüter®-LIPROTEC-WSI

diffuser lens, indirect illumination

L (m)	Art. No.	£ / m	KV (Unit)
2.5	LT WS I 20	15.80	60

END CAP



Schlüter®-LIPROTEC-WS/EK

end cap anodised aluminium,
indirect illumination

H (mm)	Art. No.	£ / U.	P (Unit)
17	EK / LT WS I AE 20	12.35	50

ACCESSORIES



From page 66, you can find compatible accessories for perfectly completing your Schlüter-LIPROTEC lighting, such as radio transmitters, receivers, power supply units and installation material.



RGB+W CONTROLLABLE

WARM WHITE

NEUTRAL WHITE

LED STRIP



Schlüter®-LIPROTEC-ES			
LED strips, RGB+W controllable, 24 V DC			
L (cm)	Art. No.	£ / m	P (Unit)
50	LT ES 9/50	92.59	10
100	LT ES 9/100	85.54	10
150	LT ES 9/150	85.54	10
200	LT ES 9/200	80.51	10
250	LT ES 9	80.51	10
400	LT ES 9/400	77.82	10

Max. length in the LIPROTEC system: 12 m
Connection length: 3 m

LT ES 9	
Dimensions (B x H)	15 x 5 mm
Rated output (W/m)	15
Number of LED (u./m)	192 (96 RGB + 96 W)
Colour temperature (Kelvin)	RGB+W (2700 K)
CRI	85



Schlüter®-LIPROTEC-ES			
LED strips, warm white, 24 V DC			
L (cm)	Art. No.	£ / m	P (Unit)
50	LT ES 11/50	65.48	10
100	LT ES 11/100	57.88	10
150	LT ES 11/150	54.56	10
200	LT ES 11/200	49.82	10
250	LT ES 11	47.45	10
400	LT ES 11/400	44.60	10

Max. length in the LIPROTEC system: 24 m
Connection length: 3 m

LT ES 1 1	
Dimensions (B x H)	12 x 5 mm
Rated output (W/m)	7.5
Number of LED (u./m)	140
Colour temperature (Kelvin)	3400 K
CRI	92



Schlüter®-LIPROTEC-ES			
LED strips, neutral white, 24 V DC			
L (cm)	Art. No.	£ / m	P (Unit)
50	LT ES 21/50	65.48	10
100	LT ES 21/100	57.88	10
150	LT ES 21/150	54.56	10
200	LT ES 21/200	49.82	10
250	LT ES 21	47.45	10
400	LT ES 21/400	44.60	10

Max. length in the LIPROTEC system: 24 m
Connection length: 3 m

LT ES 2 1	
Dimensions (B x H)	12 x 5 mm
Rated output (W/m)	7.5
Number of LED (u./m)	140
Colour temperature (Kelvin)	4900 K
CRI	92

CONTROL






You can find the Bluetooth control on page 68.
You can find the radio control on page 70.





Schlüter®-LIPROTEC-LLE

Accent lighting for tile surfaces and much more: Schlüter-LIPROTEC-LLE is our first light profile that can not only be embedded in tiling, but also be used on any other suitable substrate, thanks to an intelligent clip system. LIPROTEC-LLE can be used both for internal and external corners details, as well as in shower areas (if mounted vertically) – a true multi-talent.

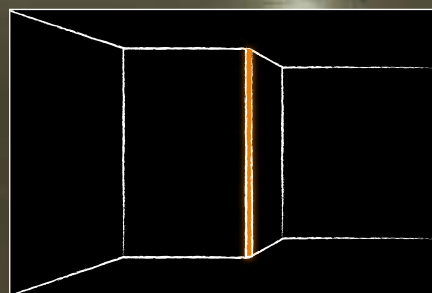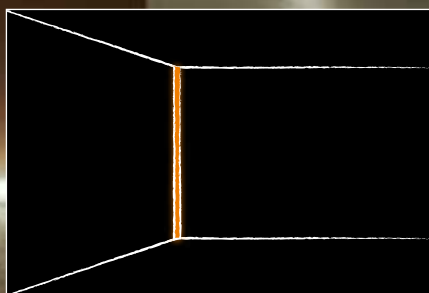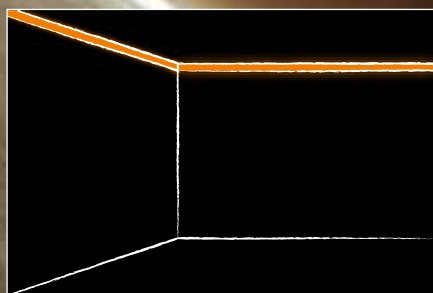



For explanations of the symbols, refer to page 99.

Re-imagine rooms

Schlüter-LIPROTEC-LLE is a high-quality carrier profile made of anodised or white coated aluminium for mounting the Schlüter-LIPROTEC-ES LED strips. The profile is designed to create accent lighting in wall corners. It is suitable for use in internal and external corners in horizontal or vertical alignment. With the use of the respective pre-fabricated parts, it can also be installed continuously around corners. The profile can either be simply attached to any suitable substrate with a clip system or is embedded in the tile adhesive. For lighting, the selected LIPROTEC-ES LED strip is adhered within the profile and covered with the corresponding diffuser lens.




(Product data sheet 15.7)



- 1 Schlüter-LIPROTEC-LLE profile
- 2 LED strip
- 3 Diffuser lens (direct illumination)

Application areas:

- ✓ Linear light, vertical in the shower
- ✓ Linear light along the ceiling
- ✓ Accent lighting on the corner

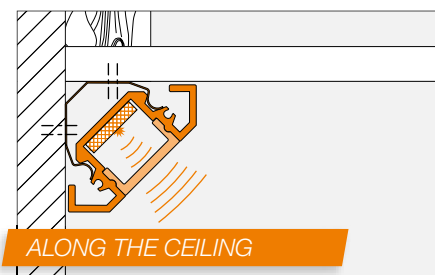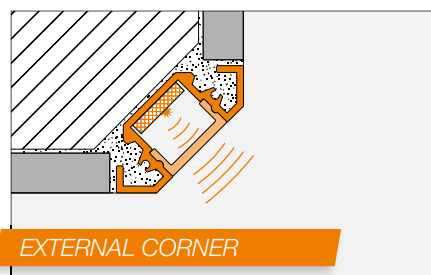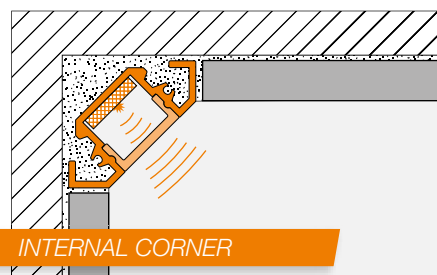


Note: Only suitable for vertical installation in the shower. For horizontal installation, we recommend our LED module LIPROTEC-LLPM on page 12.



Schlüter®-LIPROTEC-LLE

PROFILES

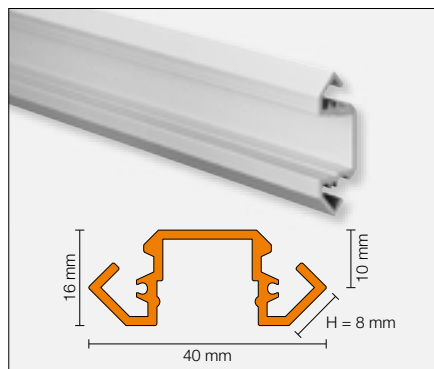

Schlüter®-LIPROTEC-LLE

anodised aluminium


H (mm)	L = 2.50 m Art. No.	£ / m	KV (Unit)
8	LT LLE 4016 AE	22.62	60

Schlüter®-LIPROTEC-LLE-AC

colour coated aluminium,
matte brilliant white

H (mm)	L = 2.50 m Art. No.	£ / m	KV (Unit)
8	LT LLE 4016 MBW	24.07	60

DIFFUSER LENS



Schlüter®-LIPROTEC-WSI

diffuser lens, indirect illumination

L (m)	Art. No.	£ / m	KV (Unit)
2.5	LT WS I 20	15.80	60

MOUNTING AID



Schlüter®-LIPROTEC-LLE/MK

installation clip

Art. No.	£ / Set	P (Set)
LT LLE MK	3.80	50

Note: Installation clip incl. attachment material; recommended installation clip spacing: every 50 cm.

END CAPS / CORNERS



Schlüter®-LIPROTEC-LLE/EK

end cap, anodised aluminium

Art. No.	£ / U.	P (Unit)
EK / LT LLE / AE	11.07	50



Schlüter®-LIPROTEC-LLE-AC/EK

end cap, colour coated aluminium


Art. No.	£ / U.	P (Unit)
EK / LT LLE / MBW	12.27	50



Schlüter®-LIPROTEC-LLE/E

90° external corner, ABS appearance

Art. No.	£ / U.	P (Unit)
E / LT LLE / AE	4.96	50



Schlüter®-LIPROTEC-LLE/I

90° internal corner, ABS appearance

Art. No.	£ / U.	P (Unit)
I / LT LLE / AE	4.96	50

Note: The external and internal corners are designed for horizontal installation along the wall only. The profile may not be embedded in the tile covering.

Schlüter®-LIPROTEC-LLE-AC/E

90° external corner, ABS

Art. No.	£ / U.	P (Unit)
E / LT LLE / MBW	4.96	50

Schlüter®-LIPROTEC-LLE-AC/I

90° internal corner, ABS

Art. No.	£ / U.	P (Unit)
I / LT LLE / MBW	4.96	50

ACCESSORIES



From page 66, you can find compatible accessories for perfectly completing your Schlüter-LIPROTEC lighting, such as radio transmitters, receivers, power supply units and installation material.

RGB+W CONTROLLABLE

WARM WHITE

NEUTRAL WHITE

LED STRIP



IP67



IP67



IP67

**Schlüter®-LIPROTEC-ES**

LED strips, RGB+W controllable, 24 V DC

L (cm)	Art. No.	£ / m	P (Unit)
50	LT ES 9/50	92.59	10
100	LT ES 9/100	85.54	10
150	LT ES 9/150	85.54	10
200	LT ES 9/200	80.51	10
250	LT ES 9	80.51	10
400	LT ES 9/400	77.82	10

Max. length in the LIPROTEC system: 12 m
Connection length: 3 m

LT ES 9

Dimensions (B x H)	15 x 5 mm
Rated output (W/m)	15
Number of LED (u./m)	192 (96 RGB + 96 W)
Colour temperature (Kelvin)	RGB+W (2700 K)
CRI	85

Schlüter®-LIPROTEC-ES

LED strips, warm white, 24 V DC

L (cm)	Art. No.	£ / m	P (Unit)
50	LT ES 11/50	65.48	10
100	LT ES 11/100	57.88	10
150	LT ES 11/150	54.56	10
200	LT ES 11/200	49.82	10
250	LT ES 11	47.45	10
400	LT ES 11/400	44.60	10

Max. length in the LIPROTEC system: 24 m
Connection length: 3 m

LT ES 1 1

Dimensions (B x H)	12 x 5 mm
Rated output (W/m)	7.5
Number of LED (u./m)	140
Colour temperature (Kelvin)	3400 K
CRI	92

Schlüter®-LIPROTEC-ES

LED strips, neutral white, 24 V DC

L (cm)	Art. No.	£ / m	P (Unit)
50	LT ES 21/50	65.48	10
100	LT ES 21/100	57.88	10
150	LT ES 21/150	54.56	10
200	LT ES 21/200	49.82	10
250	LT ES 21	47.45	10
400	LT ES 21/400	44.60	10

Max. length in the LIPROTEC system: 24 m
Connection length: 3 m

LT ES 2 1

Dimensions (B x H)	12 x 5 mm
Rated output (W/m)	7.5
Number of LED (u./m)	140
Colour temperature (Kelvin)	4900 K
CRI	92

CONTROL







You can find the Bluetooth control on page 68.
You can find the radio control on page 70.





Schlüter®-LIPROTEC-WS

Providing accent lighting of components and wall panels with atmospheric LED light is the domain of the trusted Schlüter-LIPROTEC-WS profile. They can be combined with diffuser lenses for either indirect or direct light to create individual light experiences in combination with exquisite tiles or natural stone.

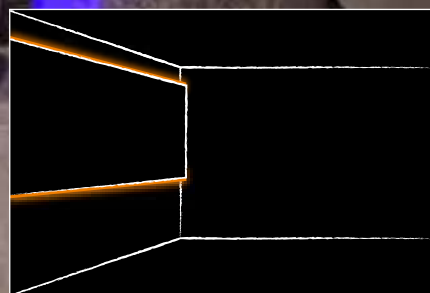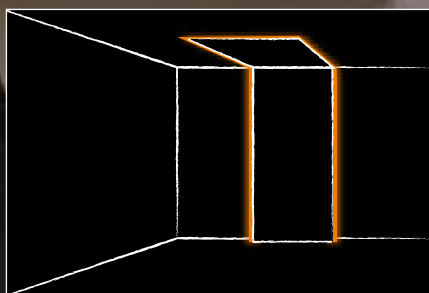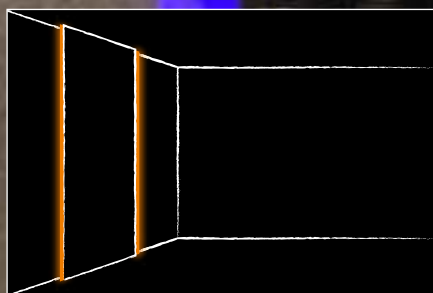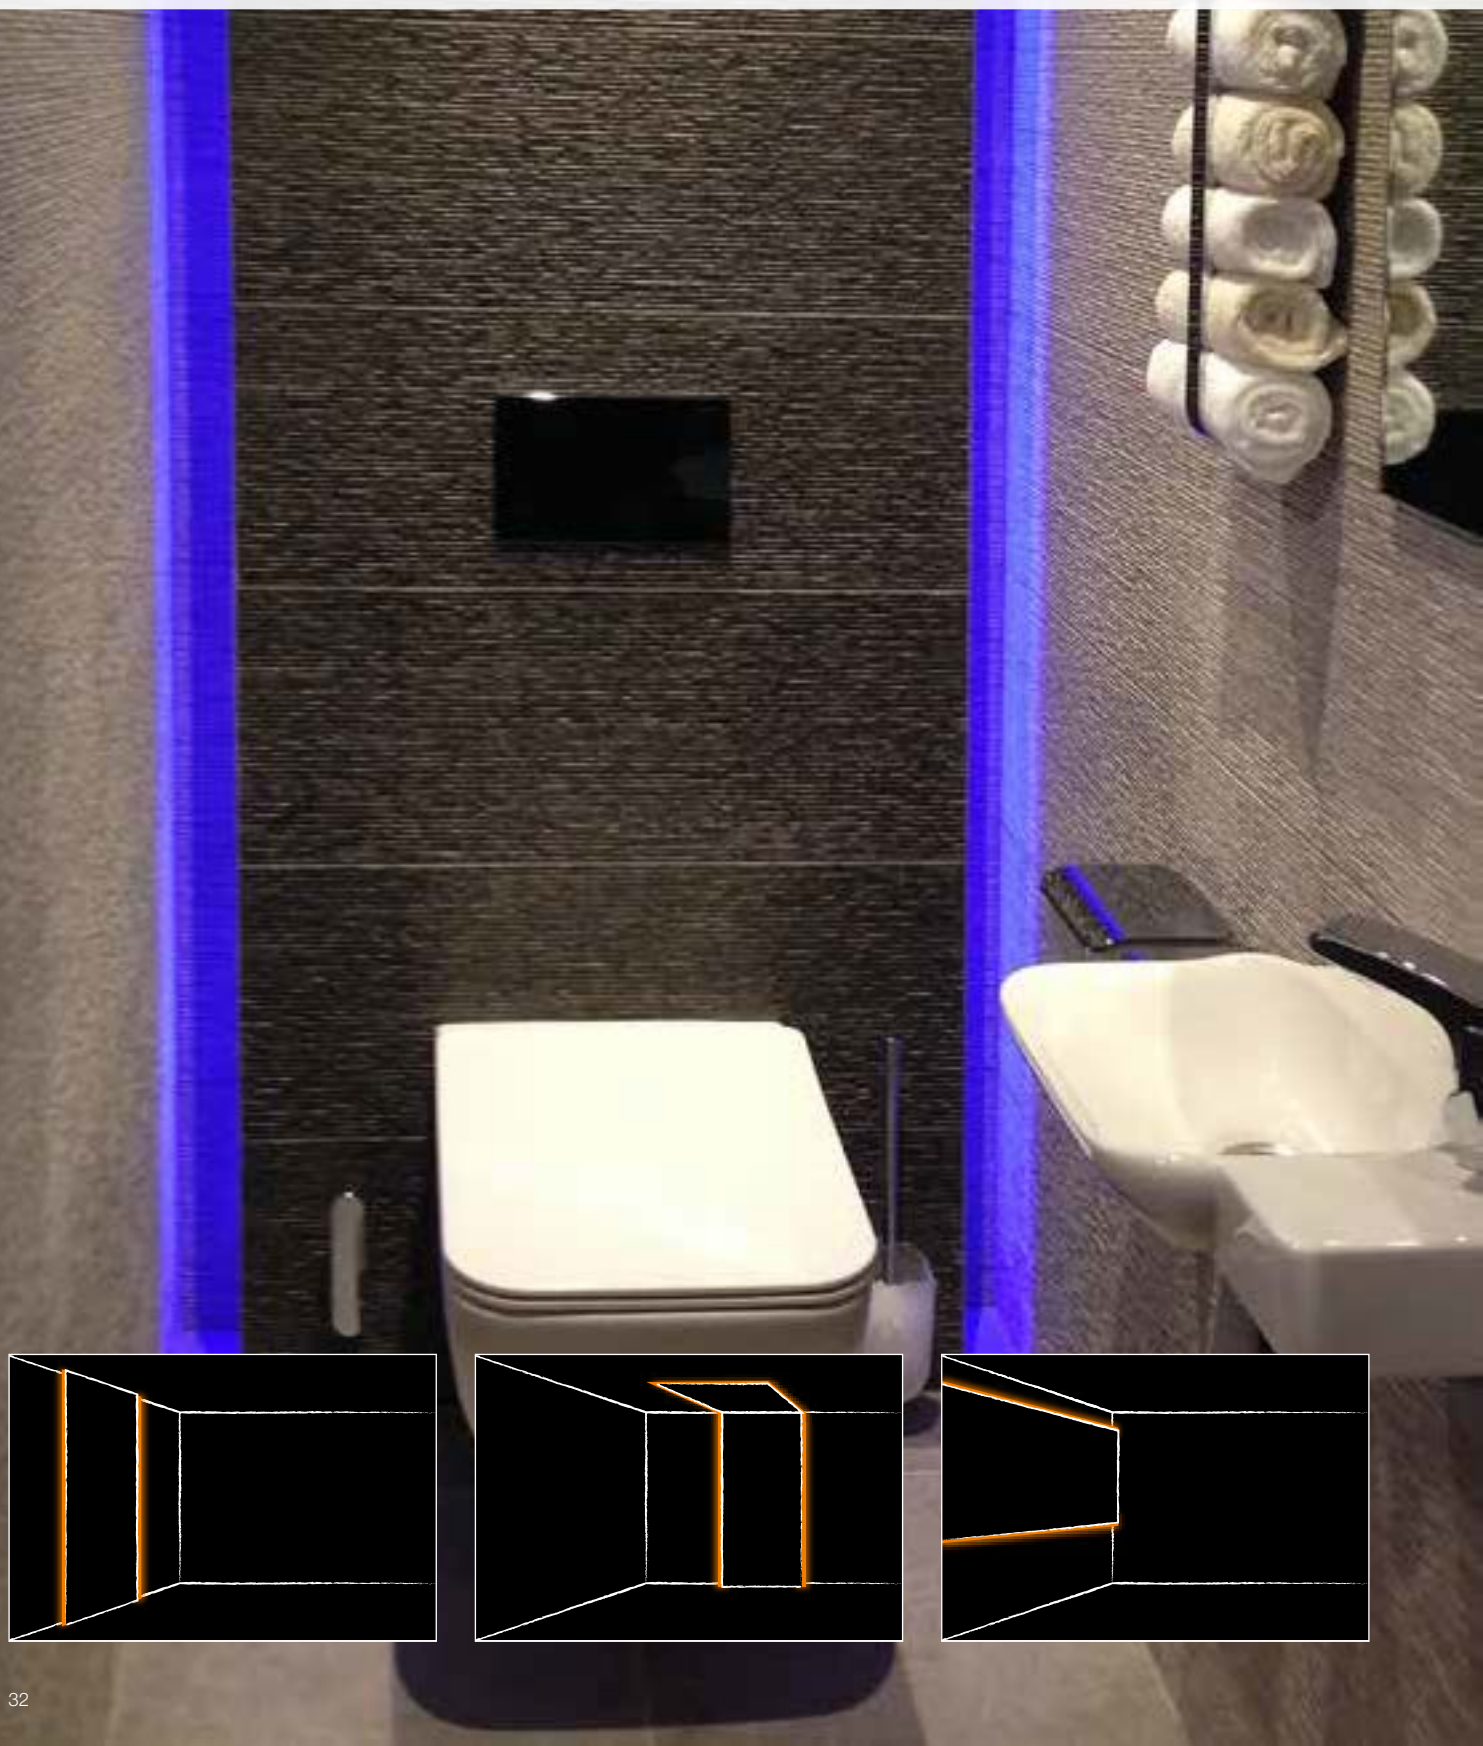



For explanations of the symbols, refer to page 99.



Building with light

Schlüter-LIPROTEC-WS is a high-quality carrier profile of anodised aluminium for illuminating protruding wall panels with various Schlüter-LIPROTEC-ES LED strips integrated into the profile. Differing light effects are created in combination with two different diffuser lenses. The assembly can be used to create recessed direct or indirect lighting for on-wall structures. The profile design allows for the easy replacement of the utilised diffuser lenses and bulbs, including after installation.

(Product data sheet 15.2)

Application areas:

- ✓ Elements
- ✓ Wall panels
- ✓ On-wall features
- ✓ Cove lighting
- ✓ Light strips

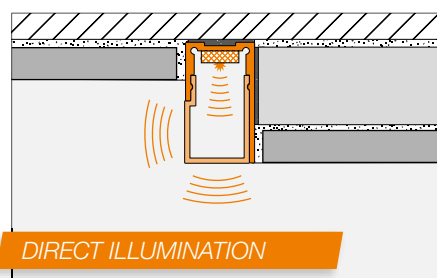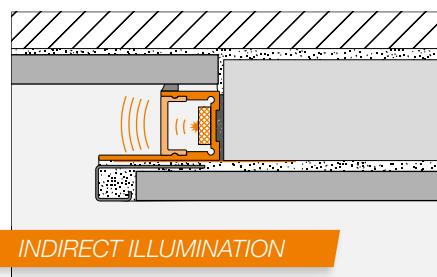

- 1 Schlüter-LIPROTEC-WS profile
- 2 LED strip
- 3 Diffuser lens (indirect illumination)
- 4 Diffuser lens (direct illumination)


Note: The diffuser lens for indirect lighting is only suitable for vertical installation in the shower.

The diffuser lens for direct lighting is only suitable for installation outside of areas that are subjected to moisture.



Schlüter®-LIPROTEC-WS

PROFILES

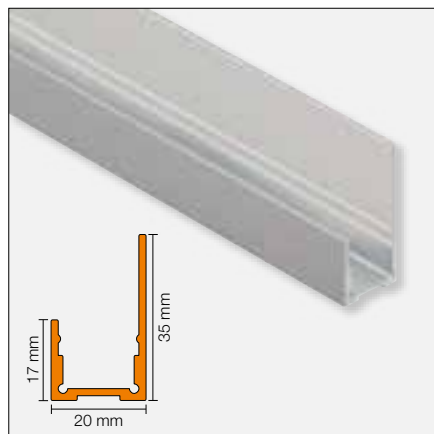

Schlüter®-LIPROTEC-WS


anodised aluminium

L (m)	Art. No.	£ / m	KV (Unit)
1	LT WS 20 AE/100	20.26	60
1.5	LT WS 20 AE/150	20.26	60
2.5	LT WS 20 AE	20.26	60



To achieve adhesive bonding between the smooth aluminium surface and the tile, the self-adhesive fleece Schlüter-DESIGNBASE-HVL 38/20M is fitted (see page 75).


DIFFUSER LENSES



Schlüter®-LIPROTEC-WSI

diffuser lens, indirect illumination

L (m)	Art. No.	£ / m	KV (Unit)
1	LT WS I 20/100	15.80	60
1.5	LT WS I 20/150	15.80	60
2.5	LT WS I 20	15.80	60



Schlüter®-LIPROTEC-WSD

diffuser lens, direct illumination

L (m)	Art. No.	£ / m	KV (Unit)
1	LT WS D 20/100	18.27	60
1.5	LT WS D 20/150	18.27	60
2.5	LT WS D 20	18.27	60

END CAPS



Schlüter®-LIPROTEC-WS/EK

end cap anodised aluminium,
indirect illumination

H (mm)	Art. No.	£ / U.	P (Unit)
17	EK / LT WS I AE 20	12.35	50



Schlüter®-LIPROTEC-WS/EK

end cap anodised aluminium,
direct illumination

H (mm)	Art. No.	£ / U.	P (Unit)
35	EK / LT WS D AE 20	13.26	50

ACCESSORIES



From page 66, you can find compatible accessories for perfectly completing your Schlüter-LIPROTEC lighting, such as radio transmitters, receivers, power supply units and installation material.



RGB+W CONTROLLABLE

WARM WHITE

NEUTRAL WHITE

LED STRIP



Schlüter®-LIPROTEC-ES			
LED strips, RGB+W controllable, 24 V DC			
L (cm)	Art. No.	£ / m	P (Unit)
50	LT ES 9/50	92.59	10
100	LT ES 9/100	85.54	10
150	LT ES 9/150	85.54	10
200	LT ES 9/200	80.51	10
250	LT ES 9	80.51	10
400	LT ES 9/400	77.82	10

Max. length in the LIPROTEC system: 12 m
Connection length: 3 m

LT ES 9	
Dimensions (B x H)	15 x 5 mm
Rated output (W/m)	15
Number of LED (u./m)	192 (96 RGB + 96 W)
Colour temperature (Kelvin)	RGB+W (2700 K)
CRI	85



Schlüter®-LIPROTEC-ES			
LED strips, warm white, 24 V DC			
L (cm)	Art. No.	£ / m	P (Unit)
50	LT ES 11/50	65.48	10
100	LT ES 11/100	57.88	10
150	LT ES 11/150	54.56	10
200	LT ES 11/200	49.82	10
250	LT ES 11	47.45	10
400	LT ES 11/400	44.60	10

Max. length in the LIPROTEC system: 24 m
Connection length: 3 m

LT ES 1 1	
Dimensions (B x H)	12 x 5 mm
Rated output (W/m)	7.5
Number of LED (u./m)	140
Colour temperature (Kelvin)	3400 K
CRI	92



Schlüter®-LIPROTEC-ES			
LED strips, neutral white, 24 V DC			
L (cm)	Art. No.	£ / m	P (Unit)
50	LT ES 21/50	65.48	10
100	LT ES 21/100	57.88	10
150	LT ES 21/150	54.56	10
200	LT ES 21/200	49.82	10
250	LT ES 21	47.45	10
400	LT ES 21/400	44.60	10

Max. length in the LIPROTEC system: 24 m
Connection length: 3 m

LT ES 2 1	
Dimensions (B x H)	12 x 5 mm
Rated output (W/m)	7.5
Number of LED (u./m)	140
Colour temperature (Kelvin)	4900 K
CRI	92

CONTROL






You can find the Bluetooth control on page 68.
You can find the radio control on page 70.





Schlüter®-LIPROTEC-WSK

Thought-through light design: An integrated cable duct, a support bracket for the tried-and-tested KERDI-BOARD (19 mm), diffuser lenses for direct and indirect illumination as desired – we have equipped the LIPROTEC-WSK products with features that make installation easier.

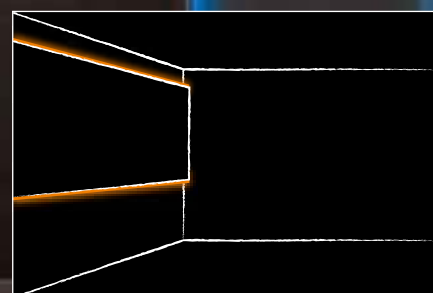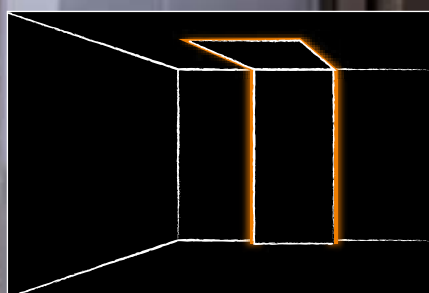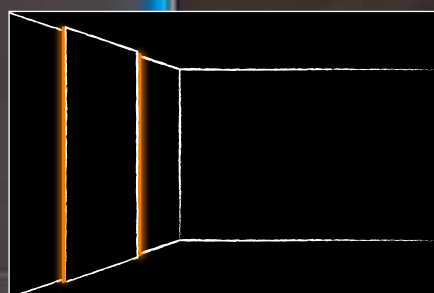



For explanations of the symbols, refer to page 99.

Accentuate!

Schlüter-LIPROTEC-WSK is a high-quality, anodised aluminium carrier profile for illuminating protruding wall panels with various Schlüter-LIPROTEC-ES LED strips laid into the profile. Differing light effects are created in combination with two different diffuser lenses. Recessed, indirect or narrow illumination for wall protrusions are created in this way. An integrated cable duct with milling grooves for cable installation and a support bracket for Schlüter-KERDI-BOARD (19 mm) aid the installation process.


(Product data sheet 15.2)



Application areas:

- ✓ Elements
- ✓ Wall panels
- ✓ On-wall features
- ✓ Cove lighting
- ✓ Light strips

- 1 Schlüter-LIPROTEC-WSK profile
- 2 LED strip
- 3 Diffuser lens (indirect illumination)

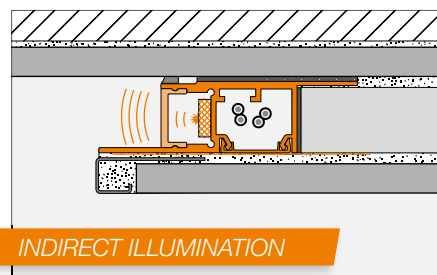


Note: The diffuser lens for indirect lighting is only suitable for vertical installation in the shower.

The diffuser lens for direct lighting is only suitable for installation outside of areas that are subjected to moisture.



Schlüter®-LIPROTEC-WSK

PROFILES

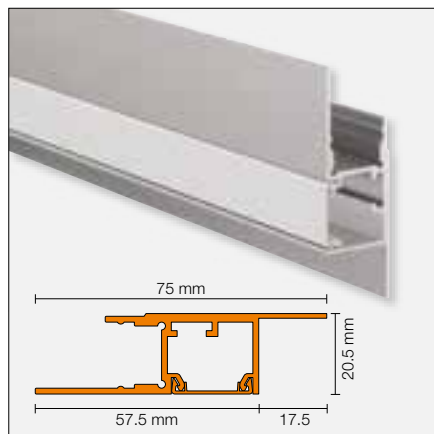

Schlüter®-LIPROTEC-WSK


anodised aluminium

L (m)	Art. No.	£ / m	KV (Unit)
2.5	WS 20 K1 AAE	32.53	60



To achieve adhesive bonding between the smooth aluminium surface and the tile, the self-adhesive fleece Schlüter-DESIGNBASE-HVL 38/20M is fitted (see page 75).


DIFFUSER LENS



Schlüter®-LIPROTEC-WSI

diffuser lens, indirect illumination

L (m)	Art. No.	£ / m	KV (Unit)
2.5	LT WS I 20	15.80	60



Schlüter®-LIPROTEC-WSD

diffuser lens, direct illumination

L (m)	Art. No.	£ / m	KV (Unit)
2.5	LT WS D 20	18.27	60

END CAPS



Schlüter®-LIPROTEC-WS/EK

end cap anodised aluminium, indirect illumination

H (mm)	Art. No.	£ / U.	P (Unit)
17	EK / LT WS I AE 20	12.35	50



Schlüter®-LIPROTEC-WS/EK

end cap anodised aluminium, direct illumination

H (mm)	Art. No.	£ / U.	P (Unit)
35	EK / LT WS D AE 20	13.26	50

ACCESSORIES



From page 66, you can find compatible accessories for perfectly completing your Schlüter-LIPROTEC lighting, such as radio transmitters, receivers, power supply units and installation material.



RGB+W CONTROLLABLE

WARM WHITE

NEUTRAL WHITE

LED STRIP



Schlüter®-LIPROTEC-ES			
LED strips, RGB+W controllable, 24 V DC			
L (cm)	Art. No.	£ / m	P (Unit)
50	LT ES 9/50	92.59	10
100	LT ES 9/100	85.54	10
150	LT ES 9/150	85.54	10
200	LT ES 9/200	80.51	10
250	LT ES 9	80.51	10
400	LT ES 9/400	77.82	10

Max. length in the LIPROTEC system: 12 m
Connection length: 3 m

LT ES 9	
Dimensions (B x H)	15 x 5 mm
Rated output (W/m)	15
Number of LED (u./m)	192 (96 RGB + 96 W)
Colour temperature (Kelvin)	RGB+W (2700 K)
CRI	85



Schlüter®-LIPROTEC-ES			
LED strips, warm white, 24 V DC			
L (cm)	Art. No.	£ / m	P (Unit)
50	LT ES 11/50	65.48	10
100	LT ES 11/100	57.88	10
150	LT ES 11/150	54.56	10
200	LT ES 11/200	49.82	10
250	LT ES 11	47.45	10
400	LT ES 11/400	44.60	10

Max. length in the LIPROTEC system: 24 m
Connection length: 3 m

LT ES 1 1	
Dimensions (B x H)	12 x 5 mm
Rated output (W/m)	7.5
Number of LED (u./m)	140
Colour temperature (Kelvin)	3400 K
CRI	92



Schlüter®-LIPROTEC-ES			
LED strips, neutral white, 24 V DC			
L (cm)	Art. No.	£ / m	P (Unit)
50	LT ES 21/50	65.48	10
100	LT ES 21/100	57.88	10
150	LT ES 21/150	54.56	10
200	LT ES 21/200	49.82	10
250	LT ES 21	47.45	10
400	LT ES 21/400	44.60	10

Max. length in the LIPROTEC system: 24 m
Connection length: 3 m

LT ES 2 1	
Dimensions (B x H)	12 x 5 mm
Rated output (W/m)	7.5
Number of LED (u./m)	140
Colour temperature (Kelvin)	4900 K
CRI	92

CONTROL



You can find the Bluetooth control on page 68.
You can find the radio control on page 70.





Schlüter®-LIPROTEC-WSQ

Accent lighting with integrated cover finish: Schlüter-LIPROTEC-WSQ combines atmospheric LED illumination for bathtubs, prewall installations and wall panels with an elegant cover finish in timeless QUADEC design. Different diffuser lenses for indirect or direct light make it possible to use the LIPROTEC-WSQ for individual light design.





For explanations of the symbols, refer to page 99.


Building with light

Schlüter-LIPROTEC-WSQ is a high-quality carrier profile of anodised aluminium for illuminating raised wall panels with various Schlüter-LIPROTEC-ES LED strips integrated into the profile. Differing light effects are created in combination with two different diffuser lenses. The assembly can be used to create recessed direct or indirect lighting for on-wall structures. LIPROTEC-WSQ features a formed cover finish with timelessly modern Schlüter-QUADEC design. The profile design allows for the easy replacement of the utilised diffuser lenses and bulbs, even after installation.


(Product data sheet 15.2)

Application areas:

- ✓ Elements
- ✓ Wall panels
- ✓ On-wall features
- ✓ Cove lighting
- ✓ Light strips

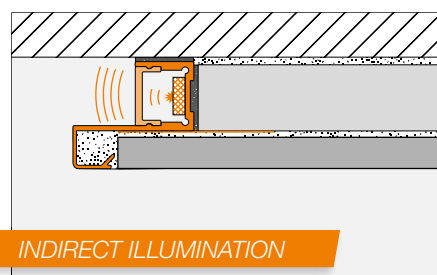

INDIRECT ILLUMINATION

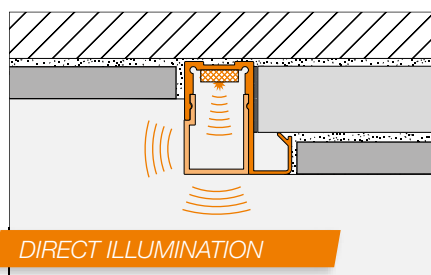

DIRECT ILLUMINATION

- 1 Schlüter-LIPROTEC-WSQ profile
- 2 LED strip
- 3 Diffuser lens (indirect illumination)
- 4 Diffuser lens (direct illumination)


Note: The diffuser lens for indirect lighting is only suitable for vertical installation in the shower.

The diffuser lens for direct lighting is only suitable for installation outside of areas that are subjected to moisture.



Schlüter®-LIPROTEC-WSQ

PROFILES

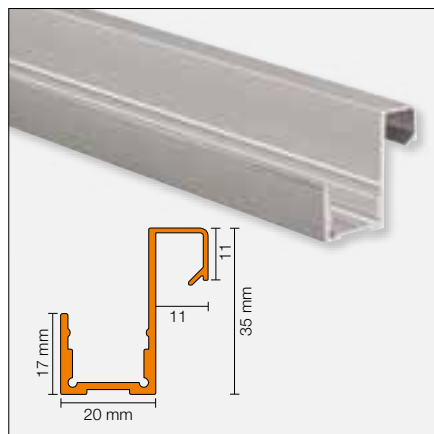

Schlüter®-LIPROTEC-WSQ


anodised aluminium, H = 11 mm

L (m)	Art. No.	£ / m	KV (Unit)
2.5	WS 20Q 110 AE	27.63	60



To achieve adhesive bonding between the smooth aluminium surface and the tile, the self-adhesive fleece Schlüter-DESIGNBASE-HVL 38/20M is fitted (see page 75).


DIFFUSER LENS



Schlüter®-LIPROTEC-WSI

diffuser lens, indirect illumination

L (m)	Art. No.	£ / m	KV (Unit)
2.5	LT WS I 20	15.80	60



Schlüter®-LIPROTEC-WSD

diffuser lens, direct illumination

L (m)	Art. No.	£ / m	KV (Unit)
2.5	LT WS D 20	18.27	60

END CAPS



Schlüter®-LIPROTEC-WS/EK

end cap anodised aluminium, indirect illumination

H (mm)	Art. No.	£ / U.	P (Unit)
17	EK / LT WS I AE 20	12.35	50



Schlüter®-LIPROTEC-WS/EK

end cap anodised aluminium, direct illumination

H (mm)	Art. No.	£ / U.	P (Unit)
35	EK / LT WS D AE 20	13.26	50

ACCESSORIES



From page 66, you can find compatible accessories for perfectly completing your Schlüter-LIPROTEC lighting, such as radio transmitters, receivers, power supply units and installation material.

RGB+W CONTROLLABLE

WARM WHITE

NEUTRAL WHITE

LED STRIP



Schlüter®-LIPROTEC-ES			
LED strips, RGB+W controllable, 24 V DC			
L (cm)	Art. No.	£ / m	P (Unit)
50	LT ES 9/50	92.59	10
100	LT ES 9/100	85.54	10
150	LT ES 9/150	85.54	10
200	LT ES 9/200	80.51	10
250	LT ES 9	80.51	10
400	LT ES 9/400	77.82	10

Max. length in the LIPROTEC system: 12 m
Connection length: 3 m

LT ES 9	
Dimensions (B x H)	15 x 5 mm
Rated output (W/m)	15
Number of LED (u./m)	192 (96 RGB + 96 W)
Colour temperature (Kelvin)	RGB+W (2700 K)
CRI	85



Schlüter®-LIPROTEC-ES			
LED strips, warm white, 24 V DC			
L (cm)	Art. No.	£ / m	P (Unit)
50	LT ES 11/50	65.48	10
100	LT ES 11/100	57.88	10
150	LT ES 11/150	54.56	10
200	LT ES 11/200	49.82	10
250	LT ES 11	47.45	10
400	LT ES 11/400	44.60	10

Max. length in the LIPROTEC system: 24 m
Connection length: 3 m

LT ES 1 1	
Dimensions (B x H)	12 x 5 mm
Rated output (W/m)	7.5
Number of LED (u./m)	140
Colour temperature (Kelvin)	3400 K
CRI	92



Schlüter®-LIPROTEC-ES			
LED strips, neutral white, 24 V DC			
L (cm)	Art. No.	£ / m	P (Unit)
50	LT ES 21/50	65.48	10
100	LT ES 21/100	57.88	10
150	LT ES 21/150	54.56	10
200	LT ES 21/200	49.82	10
250	LT ES 21	47.45	10
400	LT ES 21/400	44.60	10

Max. length in the LIPROTEC system: 24 m
Connection length: 3 m

LT ES 2 1	
Dimensions (B x H)	12 x 5 mm
Rated output (W/m)	7.5
Number of LED (u./m)	140
Colour temperature (Kelvin)	4900 K
CRI	92

CONTROL




You can find the Bluetooth control on page 68.
You can find the radio control on page 70.





Schlüter®-LIPROTEC-PB

Schlüter-LIPROTEC-PB is our universal solution for illuminated step edges. From highlighting steps in a lobby to giving a reception desk a “floating” appearance, there are thousands of applications for the intelligent illumination technology of Schlüter-Systems. For step edges, combine LIPROTEC-PB with high-quality Schlüter-TREP profiles. For staircases, we recommend the new complete sets and combination sets on page 62.

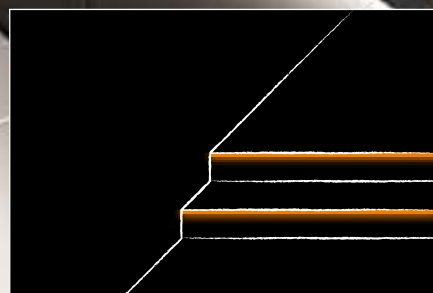



For explanations of the symbols, refer to page 99.



Step-by-step illumination

Schlüter-LIPROTEC-PB is a high-quality edge profile of anodised aluminium with a visible area of 25 mm. It is designed for mounting Schlüter-LIPROTEC-ES LED strips and can be used with Schlüter-TREP stair nosing profiles to create appealing lighting along the edges of platforms. Differing light effects are created in combination with two different diffuser lenses. Edges can either be illuminated indirectly or directly by adding a 3 mm light strip. Another application area of LIPROTEC-PB is the direct or indirect illumination of work surface front edges. The profile design allows for the easy replacement of the utilised diffuser lenses and bulbs, including after installation.

(Product data sheet 15.4)

Application areas:

✓ Platform step edges

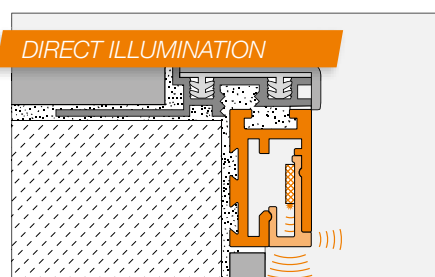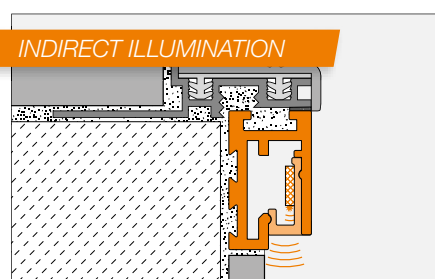


- 1 Schlüter-LIPROTEC-PB profile
- 2 LED strip
- 3 Diffuser lens (indirect illumination)
- 4 Diffuser lens (direct illumination)



Schlüter®-LIPROTEC-PB

PROFILES

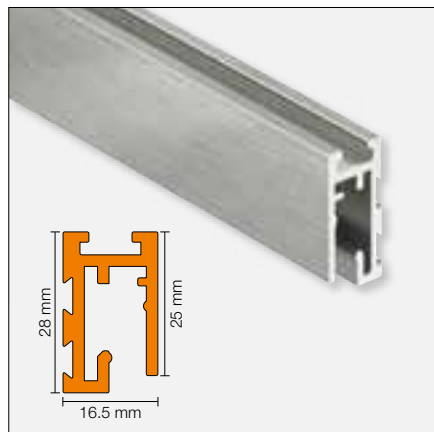

Schlüter®-LIPROTEC-PB

anodised aluminium


L (m)	Art. No.	£ / m	KV (Unit)
1	LT PB 25 AE/100	23.15	60
1.5	LT PB 25 AE/150	23.15	60
2.5	LT PB 25 AE	23.15	60

Schlüter®-LIPROTEC-PB-AEEB

brushed stainless steel appearance,
anodised aluminium

L (m)	Art. No.	£ / m	KV (Unit)
1	LT PB 25 AEEB/100	27.30	60
1.5	LT PB 25 AEEB/150	27.30	60
2.5	LT PB 25 AEEB	27.30	60


DIFFUSER LENSES



Schlüter®-LIPROTEC-VBI

diffuser lens, indirect illumination

L (m)	Art. No.	£ / m	KV (Unit)
1	LT VB I/100	15.52	60
1.5	LT VB I/150	15.52	60
2.5	LT VB I	15.52	60



Schlüter®-LIPROTEC-PBD

diffuser lens, indirect + direct illumination

L (m)	Art. No.	£ / m	KV (Unit)
1	LT PB D/100	15.61	60
1.5	LT PB D/150	15.61	60
2.5	LT PB D	15.61	60

END CAPS



Schlüter®-LIPROTEC-PB/EK

end cap, anodised aluminium

Art. No.	£ / U.	P (Unit)
EK / LT PB AE	3.95	50



Schlüter®-LIPROTEC-PB-AEEB/EK

end cap, brushed stainless steel effect
anodised aluminium

Art. No.	£ / U.	P (Unit)
EK / LT PB AEEB	4.62	50

Note: Matching corner connectors can be found on page 58.

ACCESSORIES



From page 66, you can find compatible accessories for perfectly completing your Schlüter-LIPROTEC lighting, such as radio transmitters, receivers, power supply units and installation material.

WARM WHITE

NEUTRAL WHITE

LED STRIP



IP65

**Schlüter®-LIPROTEC-ES**

LED strips, warm white, 24 V DC

L (cm)	Art. No.	£ / m	P (Unit)
50	LT ES 51/50	66.43	10
100	LT ES 51/100	58.84	10
150	LT ES 51/150	53.14	10
200	LT ES 51/200	50.29	10
250	LT ES 51	48.39	10
400	LT ES 51/400	44.60	10

Max. length in the LIPROTEC system: 24 m
Connection length: 3 m

LT ES 5 1

Dimensions (B x H)	8 x 2.5 mm
Rated output (W/m)	7.5
Number of LED (u./m)	140
Colour temperature (Kelvin)	3200 K
CRI	92



IP65

**Schlüter®-LIPROTEC-ES**

LED strips, neutral white, 24 V DC

L (cm)	Art. No.	£ / m	P (Unit)
50	LT ES 61/50	66.43	10
100	LT ES 61/100	58.84	10
150	LT ES 61/150	53.14	10
200	LT ES 61/200	50.29	10
250	LT ES 61	48.39	10
400	LT ES 61/400	44.60	10

Max. length in the LIPROTEC system: 24 m
Connection length: 3 m

LT ES 6 1

Dimensions (B x H)	8 x 2.5 mm
Rated output (W/m)	7.5
Number of LED (u./m)	140
Colour temperature (Kelvin)	4900 K
CRI	92

CONTROL






You can find the Bluetooth control on page 68.
You can find the radio control on page 70.



Schlüter®-DESIGNBASE-QD

Timeless QUADEC design combined with modern LED technology: With Schlüter-DESIGNBASE-QD, illuminated skirtings and borders can be installed with ease. Create illuminated finishes for worktops or wall structures made of stud frame constructions or Schlüter-KERDI-BOARD in next to no time.

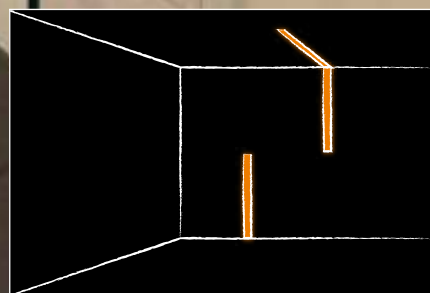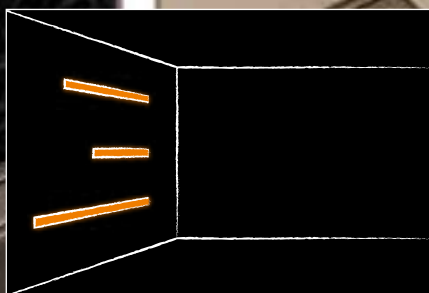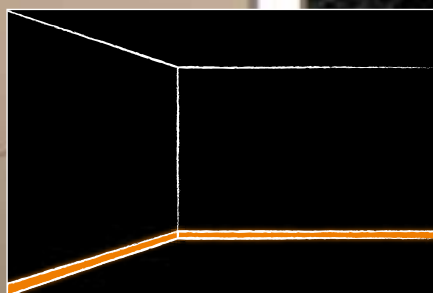



For explanations of the symbols, refer to page 99.


Defined by light

Schlüter-DESIGNBASE-QD is a high-quality profile of anodised aluminium for versatile applications. It is designed for mounting various Schlüter-LIPROTEC-ES LED strips as a skirting or border profile in wall areas. A 39 mm diffuser lens is then used between the approx. 10 mm wide visible areas of the profile to create direct illumination. Other decorative materials such as tiles or wooden elements can also be inserted in the open space. The profile design allows for the easy replacement of the utilised diffuser lenses and bulbs, even after installation.

(Product data sheet 16.1)

Application areas:

- ✓ Skirting
- ✓ Illuminated borders in wall coverings

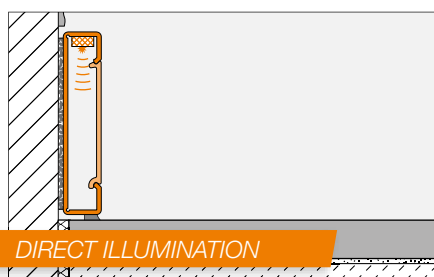


- 1 Profile AE
- 2 Profile AEEB
- 3 LED strip
- 4 Diffuser lens (direct illumination)

Note: Only suitable for vertical installation in the shower. For horizontal installation, we recommend our LED module LIPROTEC-LLPM on page 12.



Schlüter®-DESIGNBASE-QD

PROFILES

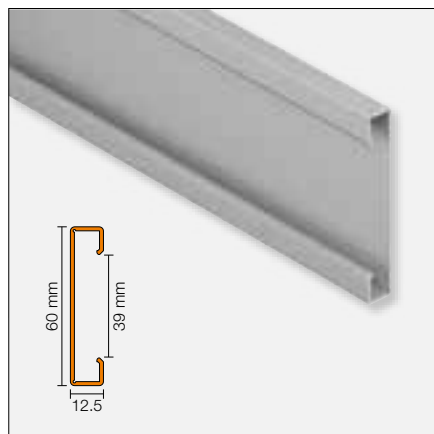

Schlüter®-DESIGNBASE-QD

anodised aluminium

L (m)	Art. No.	£ / m	KV (Unit)
2.5	DB Q1 AE	26.52	60

Schlüter®-DESIGNBASE-QD-AEEB


brushed stainless steel appearance,
anodised aluminium

L (m)	Art. No.	£ / m	KV (Unit)
2.5	DB Q1 AEEB	32.03	60



To achieve adhesive bonding between the smooth aluminium surface and the tile, the self-adhesive fleece Schlüter-DESIGNBASE-HVL 38/20M is fitted (see page 75).

DIFFUSER LENS



Schlüter®-DESIGNBASE-QDD


diffuser lens

H (mm)	L = 2.50 m Art. No.	£ / m	KV (Unit)
39	LT FSS 39	16.32	60



To prevent a disruption of the light effect, the Schlüter-LIPROTEC-RKB self-adhesive, reflective tape is placed over drill holes or cables (see page 75).

END CAPS



Schlüter®-DESIGNBASE-QD/E

external corner, anodised aluminium

Art. No.	£ / U.	P (Unit)
EV / DB Q1 AE	23.42	50



Schlüter®-DESIGNBASE-QD-AEEB/E

external corner, brushed stainless steel
effect anodised aluminium

Art. No.	£ / U.	P (Unit)
EV / DB Q1 AEEB	28.23	50

ACCESSORIES



From page 66, you can find compatible accessories for perfectly completing your Schlüter-LIPROTEC lighting, such as radio transmitters, receivers, power supply units and installation material.

WARM WHITE

NEUTRAL WHITE

LED STRIP



IP67



IP67

**Schlüter®-LIPROTEC-ES**

LED strips, warm white, 24 V DC

L (cm)	Art. No.	£ / m	P (Unit)
50	LT ES 31/50	65.48	10
100	LT ES 31/100	57.88	10
150	LT ES 31/150	54.56	10
200	LT ES 31/200	49.82	10
250	LT ES 31	47.45	10
400	LT ES 31/400	44.60	10

Max. length in the LIPROTEC system: 24 m
Connection length: 3 m

LT ES 3 1	
Dimensions (B x H)	7 x 5 mm
Rated output (W/m)	7.5
Number of LED (u./m)	140
Colour temperature (Kelvin)	3400 K
CRI	92

Schlüter®-LIPROTEC-ES

LED strips, neutral white, 24 V DC

L (cm)	Art. No.	£ / m	P (Unit)
50	LT ES 41/50	65.48	10
100	LT ES 41/100	57.88	10
150	LT ES 41/150	54.56	10
200	LT ES 41/200	49.82	10
250	LT ES 41	47.45	10
400	LT ES 41/400	44.60	10

Max. length in the LIPROTEC system: 24 m
Connection length: 3 m

LT ES 4 1	
Dimensions (B x H)	7 x 5 mm
Rated output (W/m)	7.5
Number of LED (u./m)	140
Colour temperature (Kelvin)	4900 K
CRI	92

CONTROL





You can find the Bluetooth control on page 68.
You can find the radio control on page 70.



Schlüter®-LIPROTEC-VB

Schlüter-LIPROTEC-VB not only is an elegant aluminium finishing profile for tiling – it also allows for integration of decorative accents in the tiling: for example by lighting the ceiling indirectly or as an illuminated guiding strip on the skirting tiles. Four different heights are available. Thanks to the installation height of just 3.5 mm, the Sideview-LED strips specifically designed for Schlüter-Systems are suitable for particularly detailed arrangements and lighting effects.

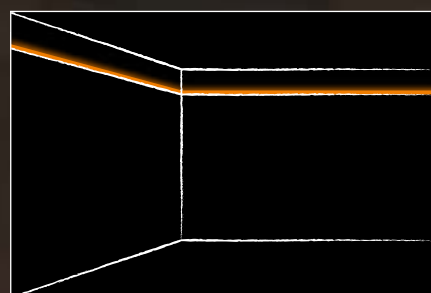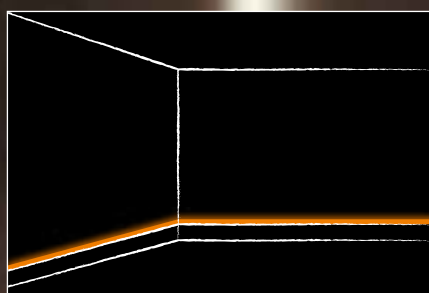



For explanations of the symbols, refer to page 99.



Light from within the tile!

Schlüter-LIPROTEC-VB is a high-quality tile finishing profile for wall areas, with a visible area of 25 mm. It is designed for mounting Schlüter-LIPROTEC-ES LED strips and can be used to create varying light effects in combination with two different diffuser lenses. Indirect light can either radiate from the profile edge to the ceiling via adjoining materials or along the skirting. Additionally, a 3 mm light strip can create direct light. The profile design allows for the easy replacement of the utilised diffuser lenses and bulbs, even after installation.

(Product data sheet 15.1)

Application areas:

- ✓ Wall coverings
- ✓ Skirting

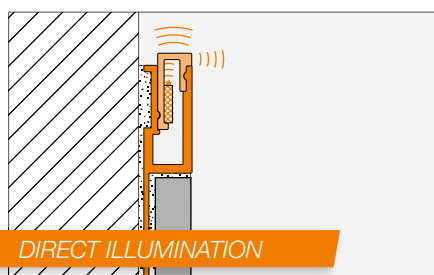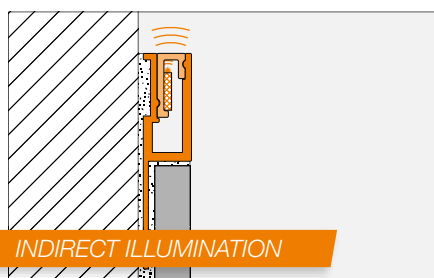


- 1 Schlüter-LIPROTEC-VB profile
- 2 LED strip
- 3 Diffuser lens (indirect illumination)
- 4 Diffuser lens (direct illumination)



Schlüter®-LIPROTEC-VB

PROFILES

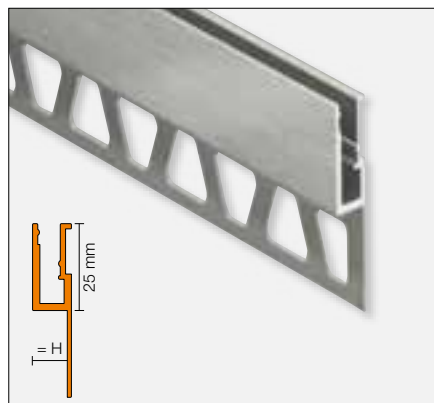

Schlüter®-LIPROTEC-VB

anodised aluminium


H (mm)	L = 2.50 m Art. No.	£ / m	KV (Unit)
8	LT VB 80 AE	20.26	60
10	LT VB 100 AE	21.00	60
11	LT VB 110 AE	21.58	60
12.5	LT VB 125 AE	22.38	60

Schlüter®-LIPROTEC-VB-AEEB

brushed stainless steel appearance,
anodised aluminium

H (mm)	L = 2.50 m Art. No.	£ / m	KV (Unit)
8	LT VB 80 AEEB	24.21	60
10	LT VB 100 AEEB	24.97	60
11	LT VB 110 AEEB	25.64	60
12.5	LT VB 125 AEEB	26.78	60


DIFFUSER LENSES



Schlüter®-LIPROTEC-VBI

diffuser lens, indirect illumination

L (m)	Art. No.	£ / m	KV (Unit)
2.5	LT VB I	15.52	60



Schlüter®-LIPROTEC-VBD

diffuser lens, direct illumination

L (m)	Art. No.	£ / m	KV (Unit)
2.5	LT VB D	15.52	60

Note: The cable feed of the LED strip that radiates light sideways is always on one side only, at the right. The light shines upward.

ACCESSORIES



From page 66, you can find compatible accessories for perfectly completing your Schlüter-LIPROTEC lighting, such as radio transmitters, receivers, power supply units and installation material.



WARM WHITE

NEUTRAL WHITE

LED STRIP



IP65



IP65

**Schlüter®-LIPROTEC-ES**

LED strips, warm white, 24 V DC

L (cm)	Art. No.	£ / m	P (Unit)
50	LT ES 51/50	66.43	10
100	LT ES 51/100	58.84	10
150	LT ES 51/150	53.14	10
200	LT ES 51/200	50.29	10
250	LT ES 51	48.39	10
400	LT ES 51/400	44.60	10

Max. length in the LIPROTEC system: 24 m
Connection length: 3 m

Schlüter®-LIPROTEC-ES

LED strips, neutral white, 24 V DC

L (cm)	Art. No.	£ / m	P (Unit)
50	LT ES 61/50	66.43	10
100	LT ES 61/100	58.84	10
150	LT ES 61/150	53.14	10
200	LT ES 61/200	50.29	10
250	LT ES 61	48.39	10
400	LT ES 61/400	44.60	10

Max. length in the LIPROTEC system: 24 m
Connection length: 3 m

LT ES 5 1

Dimensions (B x H)	8 x 2.5 mm
Rated output (W/m)	7.5
Number of LED (u./m)	140
Colour temperature (Kelvin)	3200 K
CRI	92

LT ES 6 1

Dimensions (B x H)	8 x 2.5 mm
Rated output (W/m)	7.5
Number of LED (u./m)	140
Colour temperature (Kelvin)	4900 K
CRI	92

CONTROL




You can find the Bluetooth control on page 68.
You can find the radio control on page 70.



Schlüter®-LIPROTEC-D

Schlüter-LIPROTEC-D provides accent lighting for design elements on the wall. Whether you want to highlight decorative elements, borders, pictures or mirrors, create a simple shadow joint, or set accents with indirect light – LIPROTEC-D offers solutions that are as individual and flexible as you are.

For a really simple solution, we've put together a frame set in dimensions of 118.5 x 93.5 cm with clean mitre cuts. The set includes a power supply unit, LED strips and mounting material. All you need is a suitable mirror or decorative element.

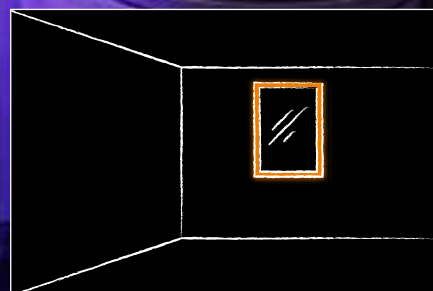



For explanations of the symbols, refer to page 99.


Properly framed!

Schlüter-LIPROTEC-D is a decorative carrier profile for wall areas of anodised aluminium with a visible area of 6 mm. It allows for the insertion of various decorative materials such as glass or mirrors to adjoin ceramic tile coverings. LIPROTEC-D can be used to mount Schlüter-LIPROTEC-ES LED strips for creating indirect light effects around a decorative element. The profile design allows for the easy replacement of the utilised diffuser lenses and bulbs, even after installation.

(Product data sheet 15.3)

Application areas:

- ✓ Mirror
- ✓ Decorative elements made from a wide range of materials

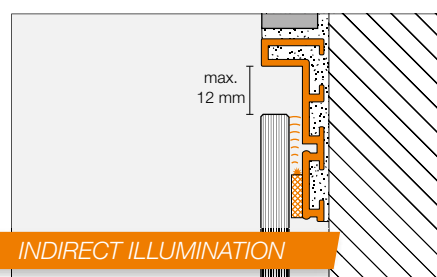


- 1 Schlüter-LIPROTEC-D profile
- 2 LED strip



Schlüter®-LIPROTEC-D

PROFILES

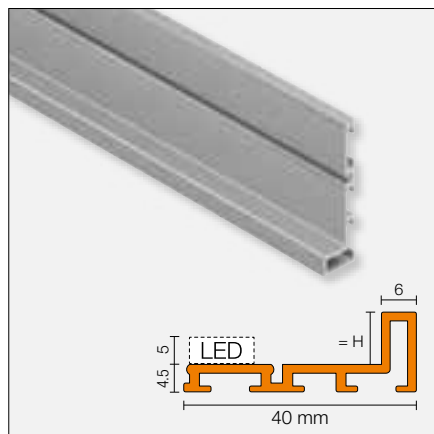

Schlüter®-LIPROTEC-D

anodised aluminium


H (mm)	Art. No.	£ / m	KV (Unit)
4.5	LT D 45 AE	22.04	60
7.5	LT D 75 AE	22.26	60
9	LT D 90 AE	24.14	60
16.5	LT D 165 AE	24.88	60

i

Selection of profile height:

5 mm must be added for the height of the LED strip LT ES 51 or LT ES 61. The profile LT D 45 AE with an intake height of 4.5 mm is recommended for the insertion of non-illuminated decorative materials.

CORNER CONNECTOR



Schlüter®-LIPROTEC-D/V

corner connector set, 4 pc.

Art. No.	£ / Set	P (Set)
V 90 / LT 10/4	10.61	50

i

2 x corner connectors are required for each frame corner.

ACCESSORIES



From page 66, you can find compatible accessories for perfectly completing your Schlüter-LIPROTEC lighting, such as radio transmitters, receivers, power supply units and installation material.



WARM WHITE

NEUTRAL WHITE

LED STRIP



IP65



IP65

**Schlüter®-LIPROTEC-ES**

LED strips, warm white, 24 V DC

L (cm)	Art. No.	£ / m	P (Unit)
50	LT ES 51/50	66.43	10
100	LT ES 51/100	58.84	10
150	LT ES 51/150	53.14	10
200	LT ES 51/200	50.29	10
250	LT ES 51	48.39	10
400	LT ES 51/400	44.60	10

Max. length in the LIPROTEC system: 24 m
Connection length: 3 m

LT ES 5 1	
Dimensions (B x H)	8 x 2.5 mm
Rated output (W/m)	7.5
Number of LED (u./m)	140
Colour temperature (Kelvin)	3200 K
CRI	92

Schlüter®-LIPROTEC-ES

LED strips, neutral white, 24 V DC

L (cm)	Art. No.	£ / m	P (Unit)
50	LT ES 61/50	66.43	10
100	LT ES 61/100	58.84	10
150	LT ES 61/150	53.14	10
200	LT ES 61/200	50.29	10
250	LT ES 61	48.39	10
400	LT ES 61/400	44.60	10



Max. length in the LIPROTEC system: 24 m
Connection length: 3 m

LT ES 6 1	
Dimensions (B x H)	8 x 2.5 mm
Rated output (W/m)	7.5
Number of LED (u./m)	140
Colour temperature (Kelvin)	4900 K
CRI	92

CONTROL




You can find the Bluetooth control on page 68.
You can find the radio control on page 70.

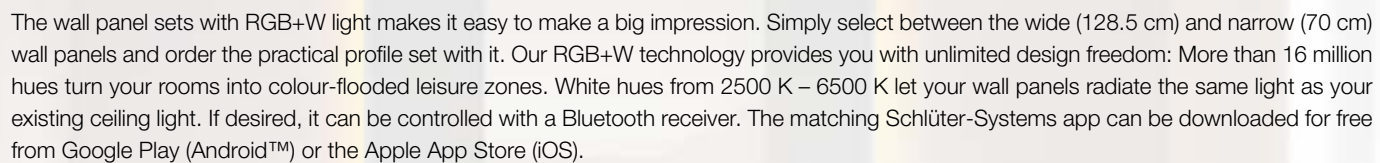

RGB+W CONTROLLABLE

PROFILE SET

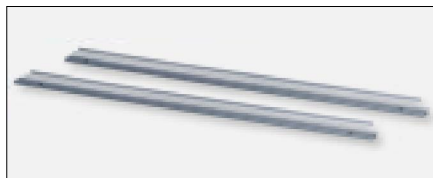**Schlüter®-LIPROTEC-WSK 2500**

profile set for backlit wall panel

L (m)	Art. No.	£ / Set	P (Set)
2.5	WS 20 K1 S2 AE	234.24	10

ACCESSORY SET

Schlüter®-LIPROTEC-WSK 700

accessory set with LED strips, RGB+W

Art. No.	£ / Set	P (Set)
WS 20 ZS2 LT ES9	709.07	10

Schlüter®-LIPROTEC-WSK 1285

accessory set with LED strips, RGB+W

Art. No.	£ / Set	P (Set)
WS 20 ZS3 LT ES9	806.88	10

CONTENTS

WSK 2500

- 2 x Schlüter-LIPROTEC-WSK profiles, length: 250 cm, with cutout for cable routing and integrated covered cable duct, incl. Schlüter-LIPROTEC-WSI diffuser lens


WSK 700

- 2 x Schlüter-LIPROTEC-ES LED strips, length: 250 cm, multi-colour + white light (RGB+W)
- 1 x set Schlüter-KERDI-BOARD, 19 mm, for end format: 250 cm x 70 cm, pre-assembled, with mounting slot for cable duct
- 1 x cable ducts with cover
- 1 x adhesive fleece Schlüter-DESIGNBASE-HVL, width: 7.5 cm, length: 800 cm
- 1 x Schlüter-KERDI-FIX, 290 ml grey
- 1 x power supply unit, 24 V, 100 W, input voltage 230 V, AC
- 1 x Schlüter-LIPROTEC-ZS 5A (connection set)
- 1 x empty tube, 200 cm, 20 mm diameter
- 1 x installation/mounting instruction

WSK 1285



- 2 x Schlüter-LIPROTEC-ES LED strips, length: 250 cm, multi-colour + white light (RGB+W)
- 1 x set Schlüter-KERDI-BOARD, 19 mm, for end format: 250 cm x 128.5 cm, pre-assembled, with mounting slot for cable duct
- 2 x cable ducts with cover
- 1 x adhesive fleece Schlüter-DESIGNBASE-HVL, width: 7.5 cm, length: 800 cm
- 1 x Schlüter-KERDI-FIX, 290 ml grey
- 1 x power supply unit, 24 V, 100 W, input voltage 230 V, AC
- 1 x Schlüter-LIPROTEC-ZS 5A (connection set)
- 1 x empty tube, 200 cm, 20 mm diameter
- 1 x installation/mounting instruction

i
You can find the appropriate Bluetooth control on page 68.

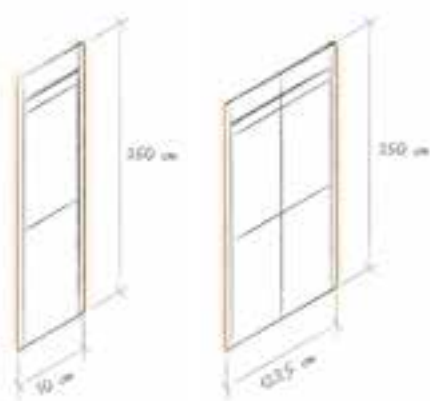

WSK 700

WSK 1285

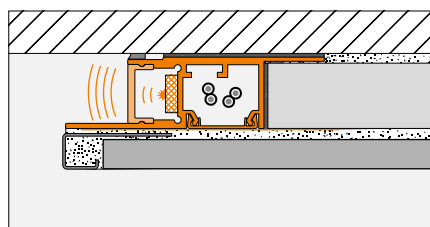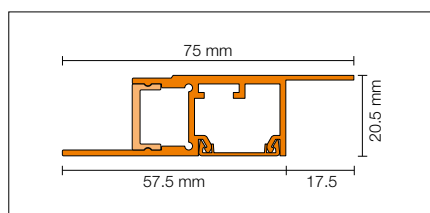




Staircase sets (PB)



Schlüter-LIPROTEC-PB stair sets put light where it is needed: in the middle of the stair step. The PB 15 complete sets for 15 steps have 60 cm wide LED modules pre-mounted in the middle. With their diffuser lenses, they provide indirect illumination with a discreet line of light. The combinations of aluminium carrier profile and diffuser lens are 100/150 cm long and can be shortened individually as required. The LED modules have a 4500 K neutral white colour temperature and are cabled by means of a simple coupling system; a 500 cm connection cable and power supply are included in the set.

If that isn't enough: the stair set can easily be expanded to 18 steps with only one supply line. To this end, use the Schlüter-LIPROTEC-PB 1 single-step sets.

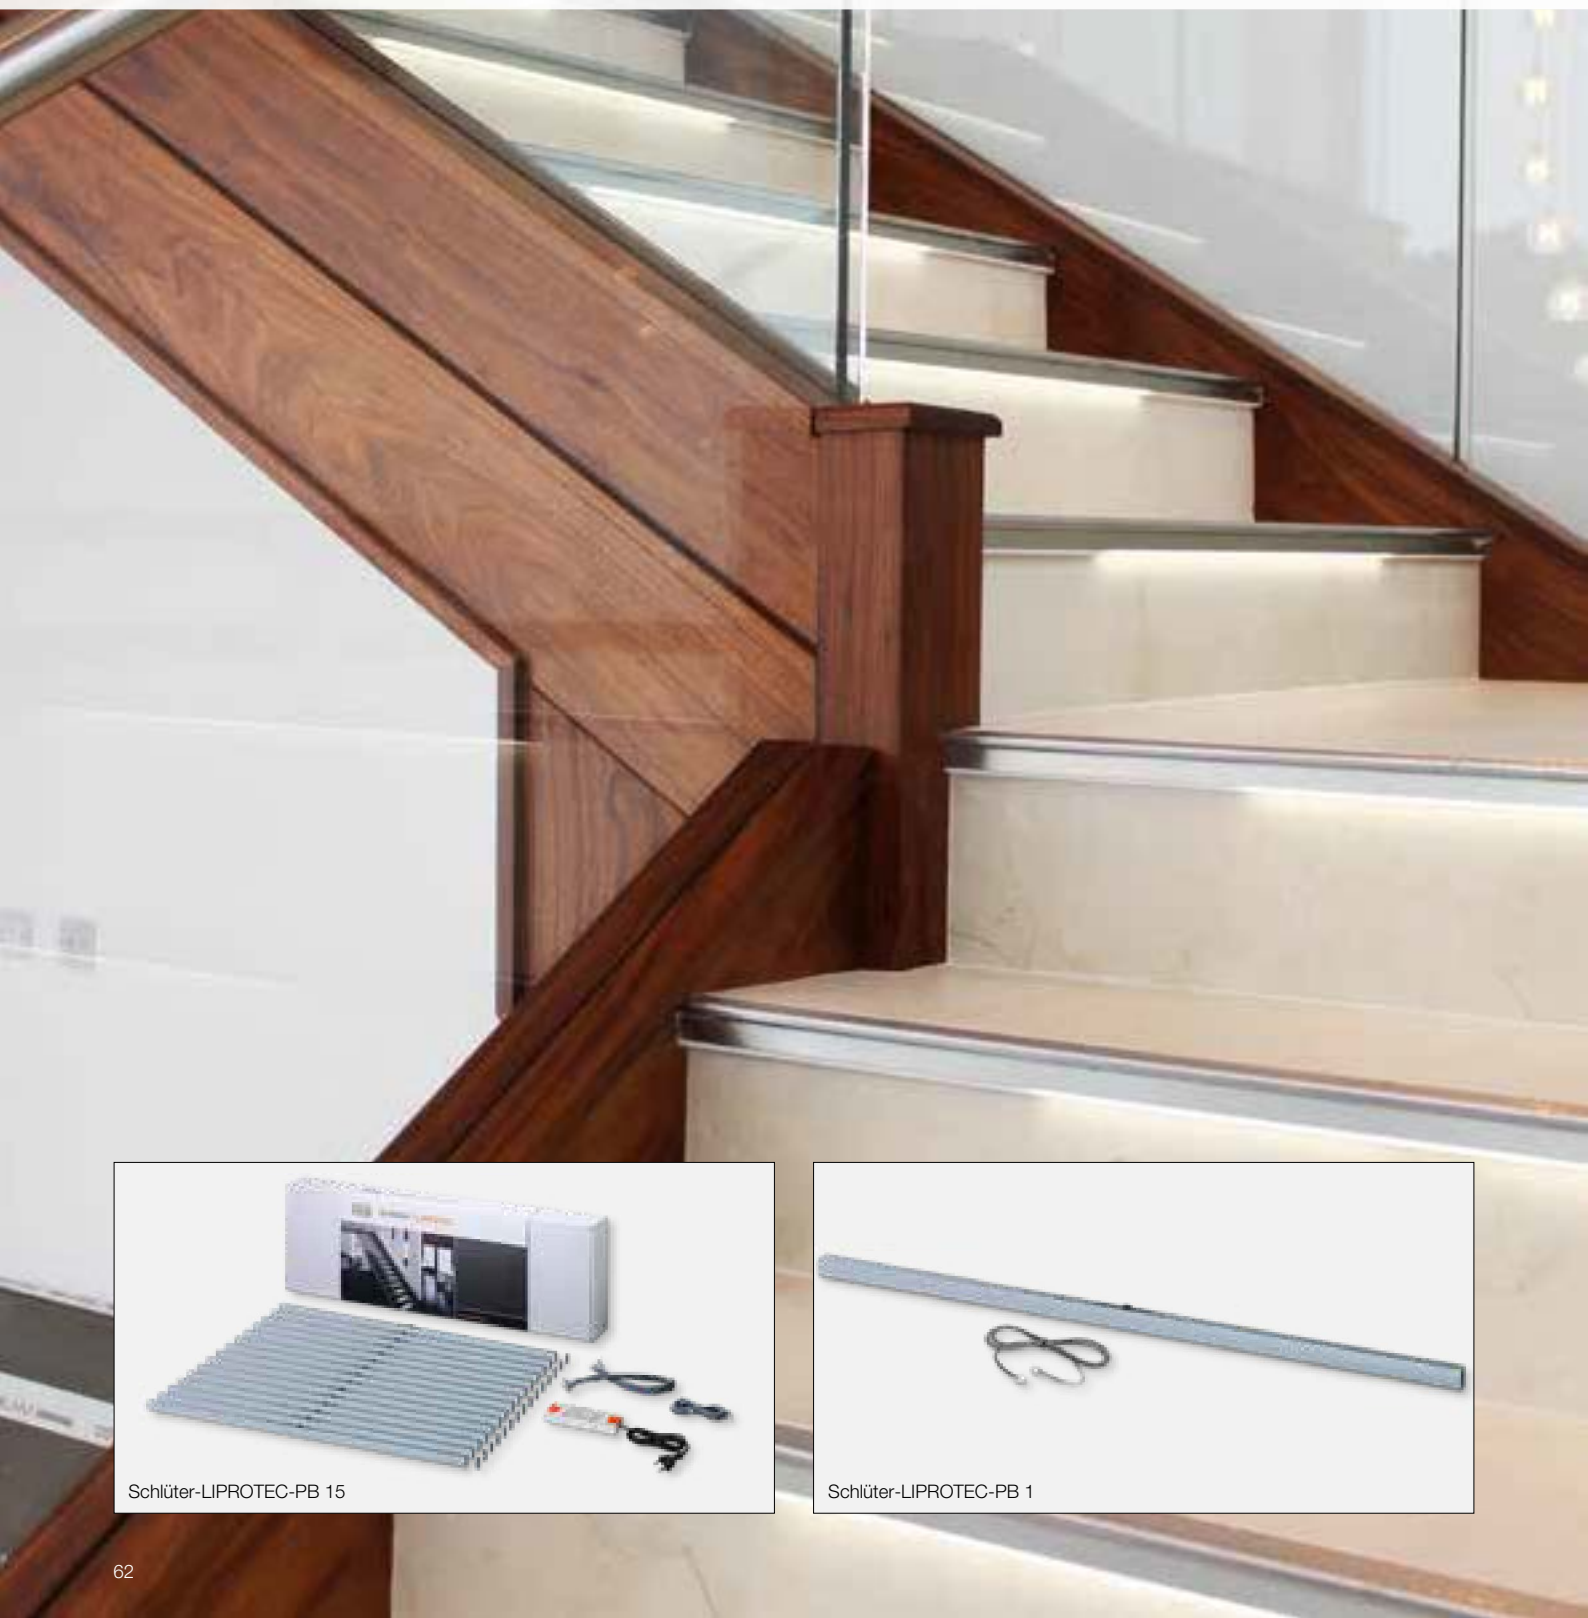

Schlüter-LIPROTEC-PB 15




Schlüter-LIPROTEC-PB 1

NEUTRAL WHITE

Advantages:

- ✓ Pre-assembled ready for installation
- ✓ Cabling and power supply unit in a complete set
- ✓ Easy installation of the sets in tile adhesive

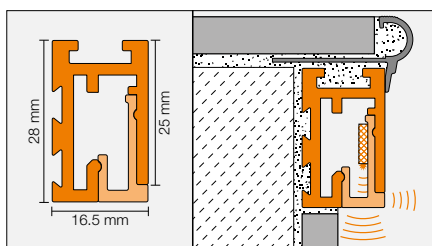

Note! Use only with indoor applications!
The set is designed for straight staircases.

The appropriate stair profiles for the respective cover material has to be ordered separately!
For variable light control, we recommend our radio control on page 70.

Schlüter®-LIPROTEC-PB 15



Complete set LT PB 15

complete set for staircases,
anodised aluminium

Art. No.	£ / Set	P (Set)
PB 15 S1 AE/100	1795.55	10
PB 15 S1 AE/150	1951.68	10

Complete set LT PB 15

complete set for staircases, brushed
stainless steel effect anodised aluminium

Art. No.	£ / Set	P (Set)
PB 15 S1 AEED/100	1874.00	10
PB 15 S1 AEED/150	2072.61	10

Schlüter®-LIPROTEC-PB 1



Combination set LT PB 1

combination set for one step,
anodised aluminium

Art. No.	£ / Set	P (Set)
PB S1 AE/100	141.04	10
PB S1 AE/150	151.44	10

Combination set LT PB 1

combination set for one step, brushed
stainless steel effect anodised aluminium

Art. No.	£ / Set	P (Set)
PB S1 AEED/100	147.67	10
PB S1 AEED/150	158.88	10

CONTENTS

- 15 x profiles LT PB, 100/150 cm each, incl. locking plate, cable feedthrough, 15 end caps
- 15 x LT PB D diffuser lenses, 100/150 cm each, incl. LED module, neutral white 4500 Kelvin, coupling system
- 14 x connection cables, 70 cm each, plug/plug system, 2 x 0.32 mm² (AWG22)
- 1 x supply cable 500 cm, single-sided plug system, 2 x 0.32 mm² (AWG22)
- 1 x power supply unit, 24 volts, 75 watts, input voltage 230 V, AC
- 1 x installation/mounting instruction

CONTENTS

- 1 x profile LT PB, 100/150 cm, incl. locking plate, cable feedthrough, end cap
- 1 x LT PB D diffuser lens, 100/150 cm, incl. LED module, neutral white 4500 Kelvin, coupling system
- 1 x connection cable 70 cm, plug/plug system, 2 x 0.32 mm² (AWG22)
- 1 x installation/mounting instruction


Schlüter®-LIPROTEC-ZZK

Schlüter-LIPROTEC-ZZK is a supply cable (2 x 0.32 mm², AWG 22) with a length of 500 cm for connecting the Schlüter-LIPROTEC-PB staircase systems to the voltage supply.

Schlüter®-LIPROTEC-ZZK

supply cable

Art. No.	£ / U.	P (Unit)
LT ZZK 2A 5M	10.37	10

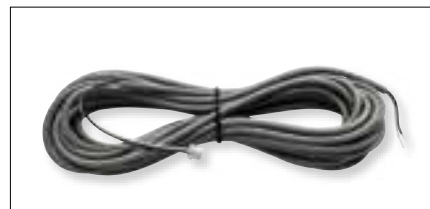



Decorative frame sets (D)



Schlüter-LIPROTEC-D 90 are sets for creating illuminated decorative frames. With these complete sets, mirrors or design elements such as printed glass or decor panels can be elegantly framed with indirect LED lighting. The carrier profiles have already been mitred and four matching Schlüter-LIPROTEC-ES-LED strips with a colour temperature of 3200 K (warm white) or 4900 K (neutral white) are included in the set, as well as the power supply unit and all material for assembly and wiring.





WARM WHITE

NEUTRAL WHITE

Advantages:

- ✓ Pre-assembled ready for installation
- ✓ Complete cabling in the set
- ✓ Set includes suitable power supply unit
- ✓ Easy installation of the sets in tile adhesive

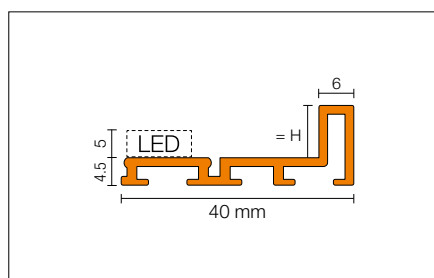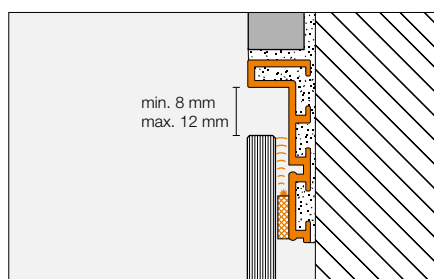

Note! For fastening the decorative element (e.g. mirror), the instructions in the manuals have to be followed.

For variable light control, we recommend our Bluetooth control on page 69 or our radio control on page 70.

Complete set LT D 90 S1**complete frame set, warm white, 3200 K**

H (mm)	Art. No.	£ / Set	P (Set)
9	LT D90 S1 AE	602.14	10

CONTENTS

- 1 x Schlüter-LIPROTEC-D 90 profile frame, 118.5 cm x 93.5 cm incl. mitre cuts and milled edges for decorative material support incl. Schlüter-LIPROTEC-D/V corner connectors
- 2 x LED strips, Schlüter-LIPROTEC-ES, length: 110 cm, warm white 3200 Kelvin
- 2 x LED strips, Schlüter-LIPROTEC-ES, length: 85 cm, warm white 3200 Kelvin
- 1 x set of decorative material supports, above/below (4 units)
- 1 x set of mirror plates, above/below (4 units)
- 1 x Schlüter-LIPROTEC-ZS connection set
- 1 x empty tube, 200 cm, 20 mm diameter
- 1 x power supply unit, 24 V, 50 W, input voltage 230 V, AC
- 1 x installation/mounting instruction
- 1 x installation tool/mounting aid

Complete set LT D 90 S2**complete frame set, neutral white, 4900 K**

H (mm)	Art. No.	£ / Set	P (Set)
9	LT D90 S2 AE	602.14	10

CONTENTS

- 1 x Schlüter-LIPROTEC-D 90 profile frame, 118.5 cm x 93.5 cm incl. mitre cuts and milled edges for decorative material support incl. Schlüter-LIPROTEC-D/V corner connectors
- 2 x LED strips, Schlüter-LIPROTEC-ES, length: 110 cm, neutral white 4900 Kelvin
- 2 x LED strips, Schlüter-LIPROTEC-ES, length: 85 cm, neutral white 4900 Kelvin
- 1 x set of decorative material supports, above/below (4 units)
- 1 x set of mirror plates, above/below (4 units)
- 1 x Schlüter-LIPROTEC-ZS connection set
- 1 x empty tube, 200 cm, 20 mm diameter
- 1 x power supply unit, 24 V, 50 W, input voltage 230 V, AC
- 1 x installation/mounting instruction
- 1 x installation tool/mounting aid

**Dimensions of decorative element (e.g. mirror):**


115.3 cm x 90.3 cm (illuminated gap: 10 mm)

Weight of decorative element: max. 16 kg



Controlling Schlüter-LIPROTEC is individual as you and your customers. We have the right solution for every level of sophistication: from simple single-channel switches to a combination of radio remote control and Bluetooth control per smartphone. If you want, you can also simply control your LIPROTEC accent lighting with an existing light switch. Anything but complicated! Control Schlüter-LIPROTEC the way you want:


- ✓ On / off with light switch already available in the building
- ✓ On / off / dimming with our radio switches
- ✓ On / off / dimming per app and remote control
- ✓ On / off / dimming and colour control per app and remote control

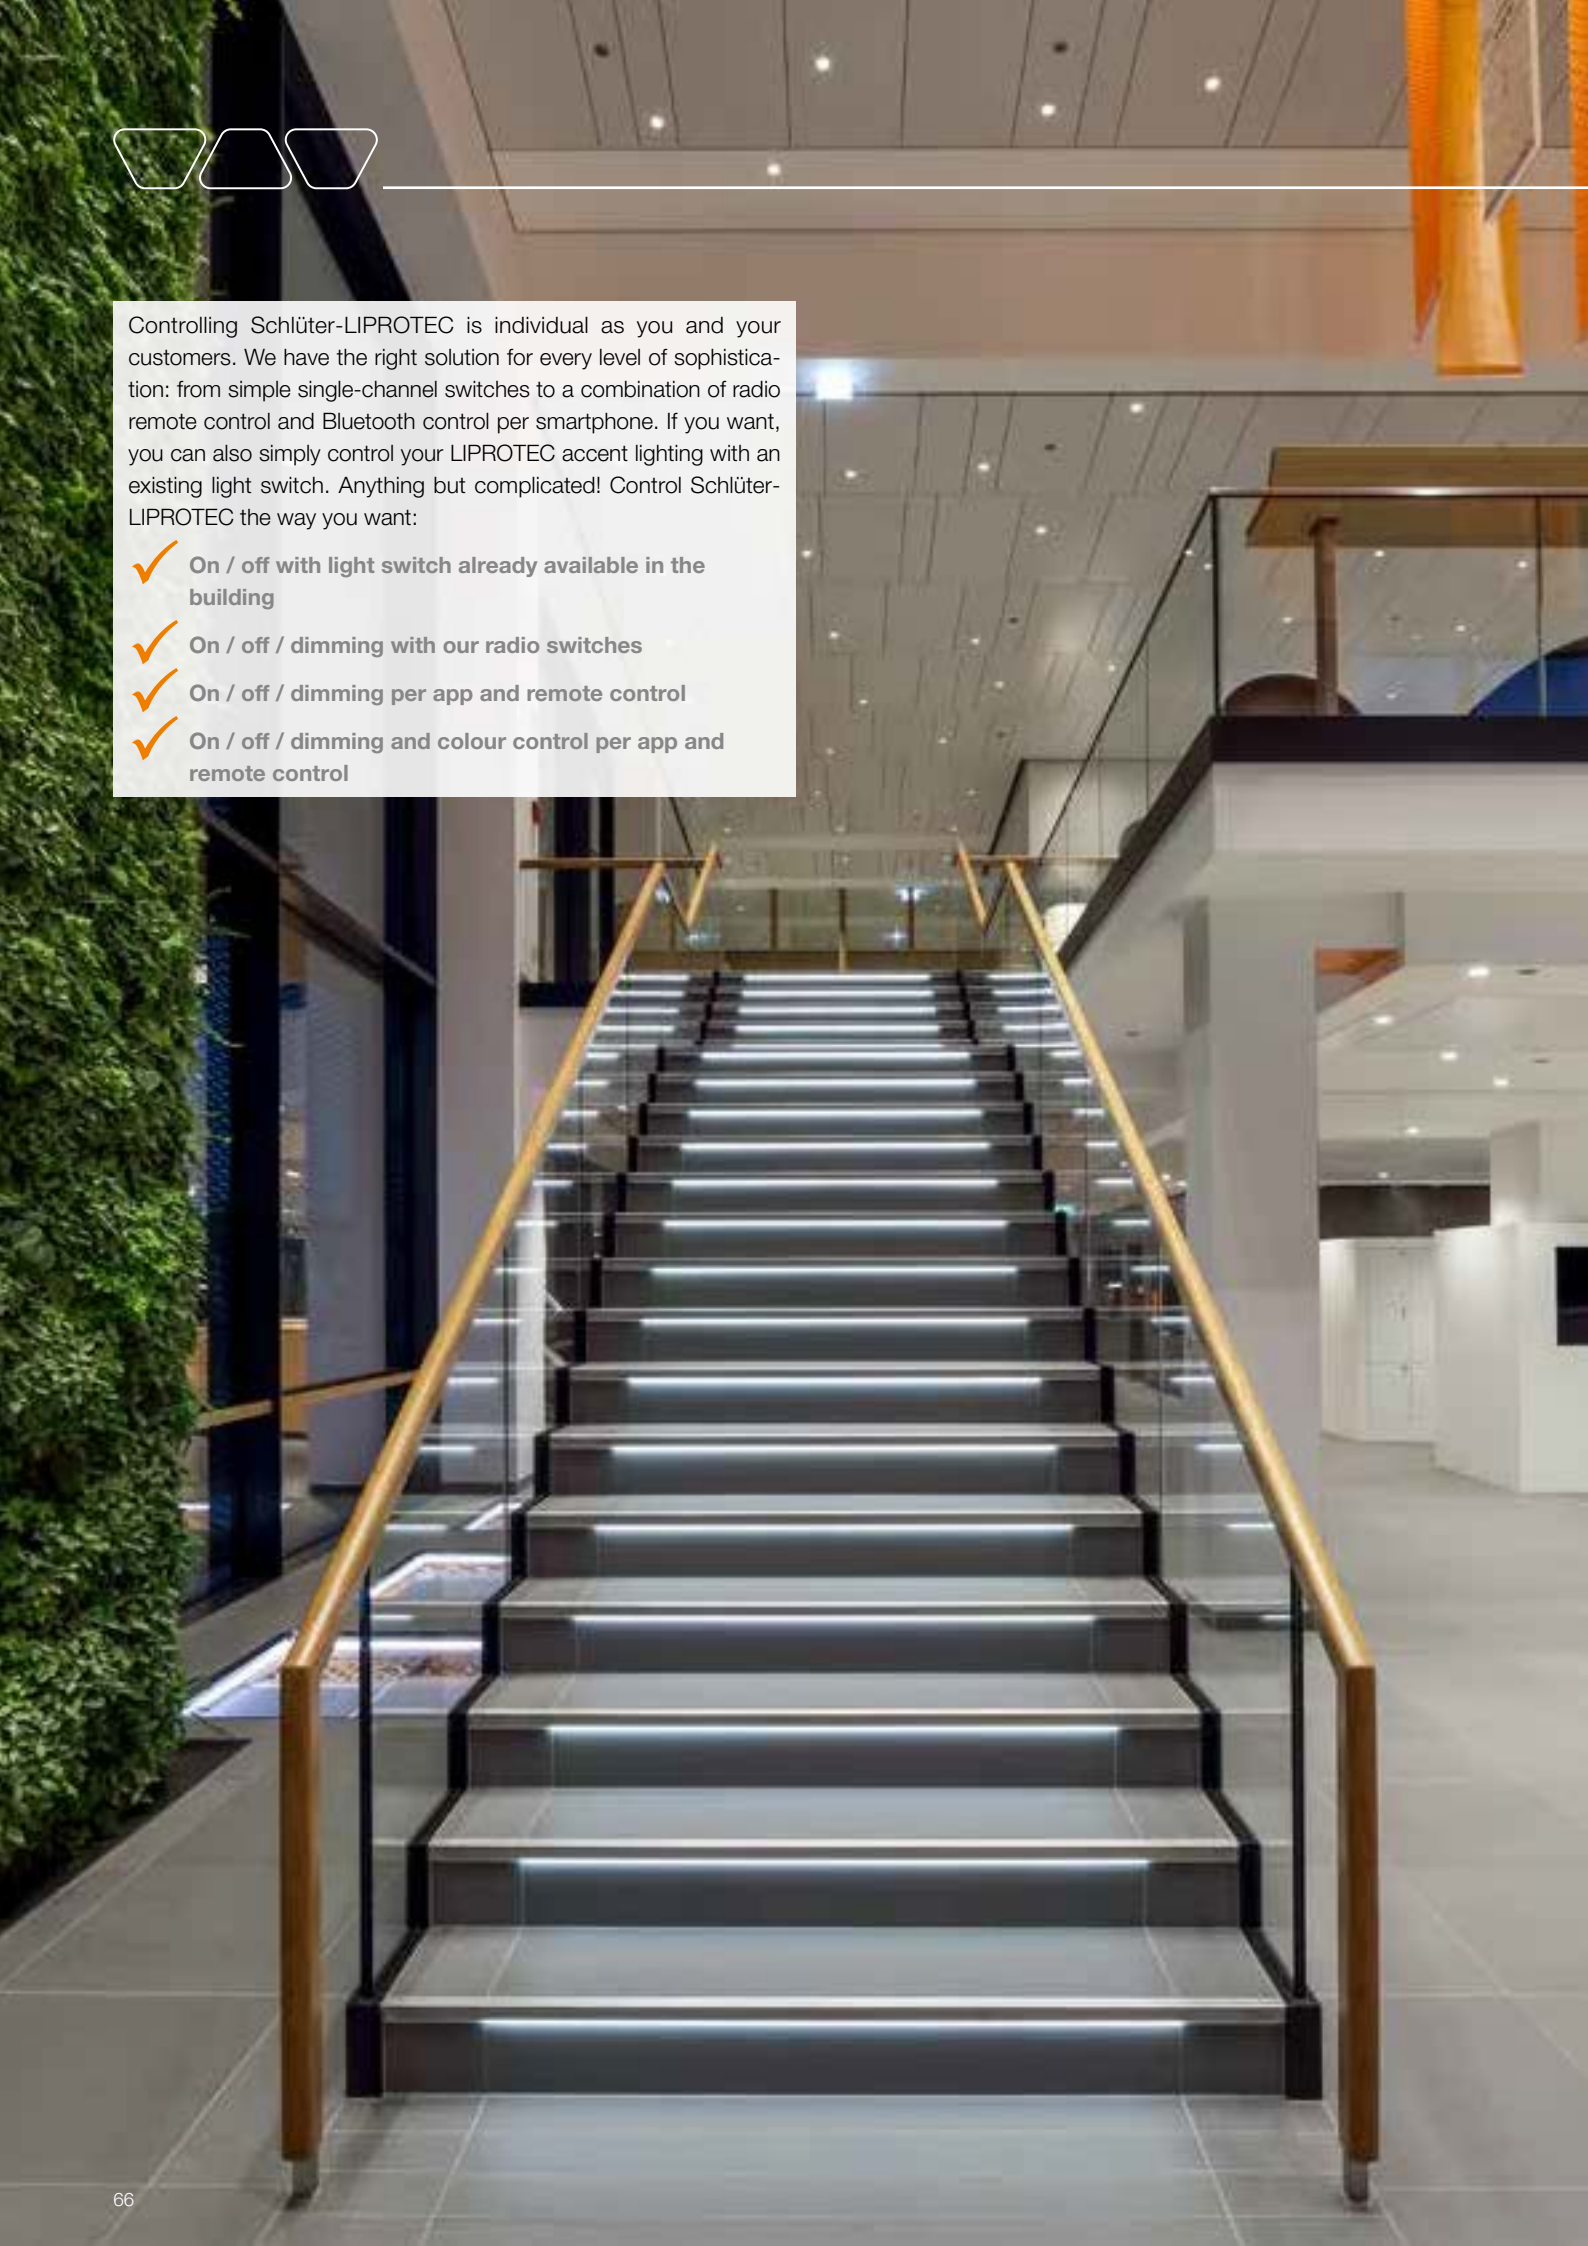


Control of Schlüter®-LIPROTEC LED installations

Schlüter-LIPROTEC is a system for individual solutions. You also have full freedom of choice for controlling the LEDs. You can choose between various concepts depending on the desired light type and installation size. You can use innovative and economic Bluetooth control, radio control with a transmitter and receiver, or control larger installations centrally using master/slave technology. Align yourself with our schematic diagrams and let us guide you to the suitable technology.


Bluetooth control (smartphone/tablet with free app) Page 69

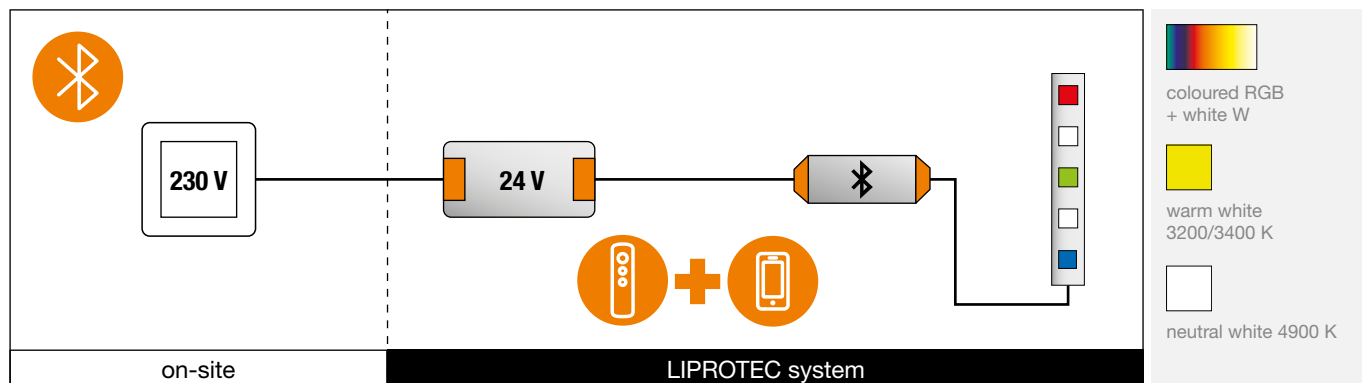

Radio control (transmitter and receiver) Page 70

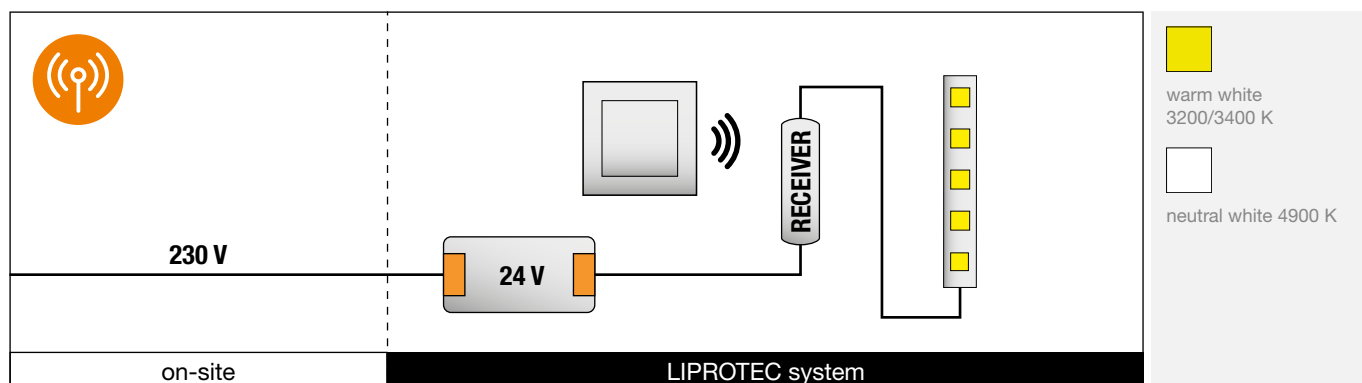

Radio control for objects (transmitter and master/slave receiver) Page 72

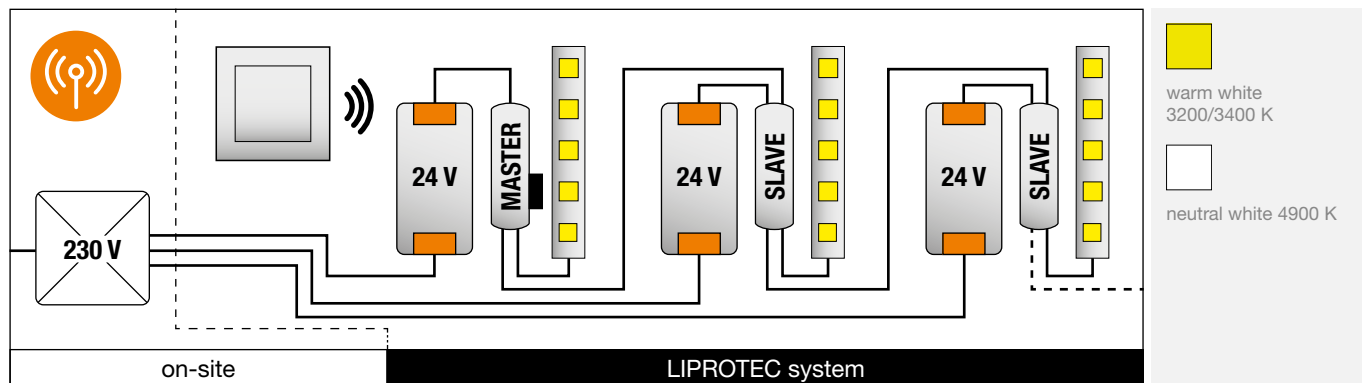



Schlüter®-LIPROTEC Bluetooth control

Schlüter-LIPROTEC-EBR are Bluetooth receivers for installations with innovative illuminated profile technology. The Schlüter-LIPROTEC-EBR 1/-EBR 4 receivers are controlled either with a remote control contained in the scope of supply or with mobile end devices such as smartphones and tablets. An attractive wall holder accommodates the remote control using a magnet fixing system. An app for control can be downloaded for free via Google Play (Android™) or the Apple App Store (iOS).



Schlüter®-LIPROTEC-EBR 4

Schlüter-LIPROTEC-EBR 4 is a Bluetooth/radio receiver for controlling up to 12 m of LED strip from the LT ES 9 series using the included radio remote control or via suitable Bluetooth-capable smartphones or tablets. The receiver is operated via Bluetooth by means of the Schlüter-LED-Colour-Control app, which is downloadable for free for both Android and iOS devices. Up to two end devices can be simultaneously coupled with the receiver.

More than 16 million colours and white tones with variable colour temperatures can be set with the RGB+W LED strips LT ES. It is possible to store a preselection of white and coloured hues as favourites in the app. 42 different colour sequences are preprogrammed and can be played at variable speeds. The very compact dimensions of the Bluetooth receiver enable space-saving installation. We recommend using a standard light switch to optimise operating convenience.

Schlüter®-LIPROTEC-EBR 4

Bluetooth/radio receiver RGB+W, controllable

Art. No.	£ / U.	P (Unit)
LT EBR 4	150.96	10



coloured RGB + white W

Contents

- Bluetooth receiver 24 V
- Radio remote control with battery
- Wall holder for remote control
- 5 x connection terminals, 3-core



Technical data for Bluetooth receiver

(for use with LT ES 9 RGB+W LED strips)

Max. range:	10 m
Input voltage:	24 V, DC
Max. total load in the LIPROTEC system:	180 W
Max. length LED strips:	12 m
Degree of protection:	IP63
Ambient temperature:	-20 °C to +50 °C

Schlüter®-LIPROTEC-EBR 1

Schlüter-LIPROTEC-EBR 1 is a Bluetooth/radio receiver for controlling up to 24 m of white LED strip from the LT ES 11 – LT ES 61 series using the included radio remote control or via suitable Bluetooth-capable smartphones or tablets. The receiver is operated via Bluetooth by means of the Schlüter LED Colour Control app, which is downloadable for free for both Android and iOS devices. The various intensities (dimmed/luminous) can be saved as favourites in the app software and controlled via a mobile end device and the included remote control.

Up to two end devices can be simultaneously coupled with the receiver. The very compact dimensions of the receiver enable space-saving installation.

We recommend using a standard light switch to optimise operating convenience.

Schlüter®-LIPROTEC-EBR 1

Bluetooth/radio receiver, white

Art. No.	£ / U.	P (Unit)
LT EBR 1	145.94	10



neutral white
4900 K



warm white
3200/3400 K

Contents

- Bluetooth receiver 24 V
- Radio remote control with battery
- Wall holder for remote control
- 2 x connection terminals, 3-core



Technical data for Bluetooth receiver


(for use with LT ES 11 to LT ES 61 LED strips)

Max. range:	10 m
Input voltage:	24 V, DC
Max. total load in the LIPROTEC system:	180 W
Max. length LED strips:	24 m
Degree of protection:	IP63
Ambient temperature:	-20 °C to +50 °C



Everything under control: Systematic LED control

We offer the highest quality system components for light control to help you make the most of the Schlüter illuminated profile technology options available. These range from reliable power supply units to intelligent receivers and elegant switches that transmit their commands wirelessly to the illumination components. As an additional benefit, wireless control technology significantly reduces the expenditure of installation and wiring.

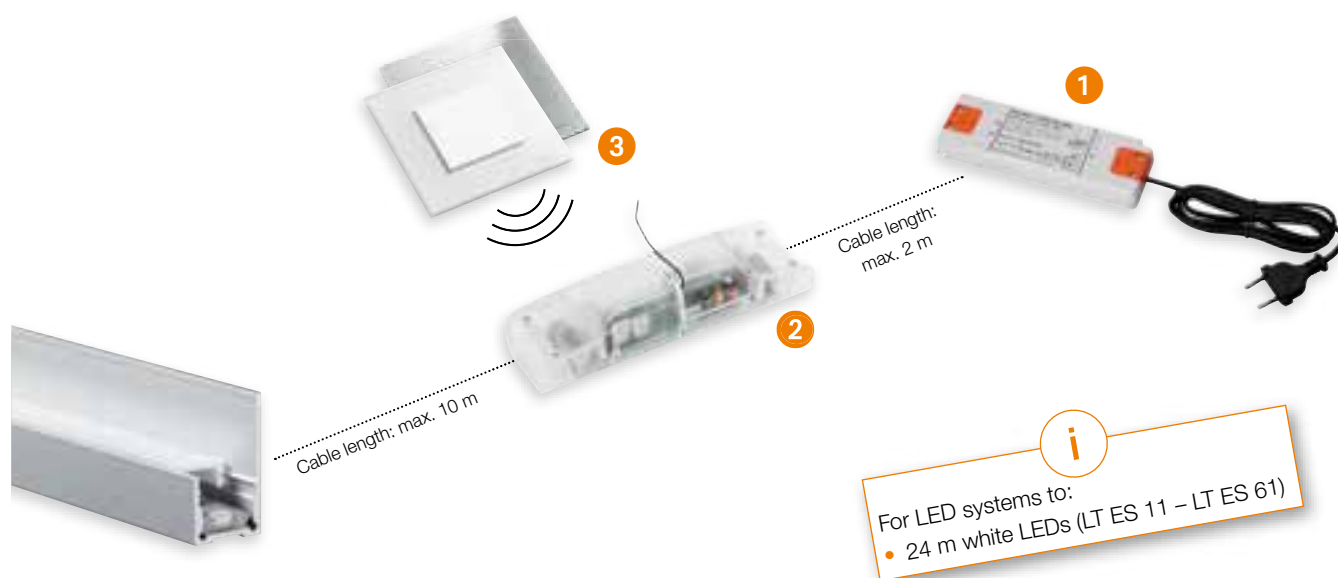

1 Schlüter®-LIPROTEC-EKE – Power supply units

Power supply units convert the mains voltage to the 24 V required by our LED strips. They are easy to install and available in different wattages from 30 to 200 W for LED strips up to 24 linear metres.

2 Schlüter®-LIPROTEC-ER – Receivers

Receivers transpose the wireless signals from the switch (transmitter) into commands for the LED strips. They are available in the following versions:

- LT ER 1 (on, off, dim) for simultaneous control of white LED strips with fixed colour temperature.

3 Schlüter®-LIPROTEC-E – Switches (transmitters)


With the switches, the user can control the illuminated profile technology. The wireless control makes installation very easy. All switches (transmitters) are available in two different frame designs. You can choose between genuine glass, back-coated in brilliant white or brushed stainless steel (V4A).

The switches (transmitters) are available in the following versions:

- Single channel (on, off, dim) for controlling white LED strips with fixed colour temperature together with receiver LT ER 1.
- Dual channel (on, off, dim) for simultaneous control of two LT ER 1 receivers with white LED strips and fixed colour temperature.

Schlüter®-LIPROTEC-EKE

Schlüter®-LIPROTEC-EKE				
power supply 24 V DC				
Watt	Max. Watt*	Art. No.	£ / U.	P (Unit)
30	27	LT EKE 24V 30W	53.14	10
50	45	LT EKE 24V 50W	69.27	10
75	67.5	LT EKE 24V 75W	92.99	10
100	90	LT EKE 24V 100W	135.70	10
150	135	LT EKE 24V 150W	153.73	10
200	180	LT EKE 24V 200W	178.40	10

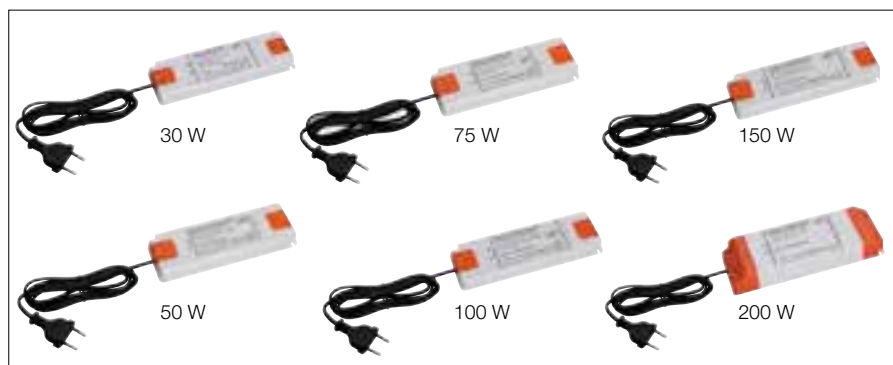

Ambient temperature: -20 °C to +50 °C,
Input voltage: 230 V, AC

* A safety reserve has to be taken into account when selecting the power supply unit (see maximum load of the corresponding power supply unit).

	LT EKE 24V 30W	LT EKE 24V 50W	LT EKE 24V 75W	LT EKE 24V 100W	LT EKE 24V 150W	LT EKE 24V 200W
B x H x T (mm)	156 x 50 x 17	160 x 58 x 18	160 x 58 x 18	164 x 57 x 17	177 x 57 x 18	195 x 67 x 31

Length of supply line: 1.8 m

Schlüter®-LIPROTEC-ER

Receivers transpose the wireless signals from the switch (transmitter) into commands for the LED strips and enable continuous dimming.

Schlüter®-LIPROTEC-ER		
receiver with connection cable, white 24 V		
Art. No.	£ / U.	P (Unit)
LT ER 1	255.01	10



For controlling the LED strips LT ES 11 to LT ES 61.

Schlüter®-LIPROTEC-E

Radio transmitters are used to control the illuminated profile technology by the user. The wireless control makes installation very easy. All switches (transmitters) are available in two different frame designs. You can choose between genuine glass, back-coated in brilliant white or brushed stainless steel (V4A). The transmitter can be attached to suitable substrates with the supplied double-sided adhesive tape, an installation box is not required.

Schlüter®-LIPROTEC-E			
switch (transmitter), genuine glass, brilliant white			
Number of buttons	Art. No.	£ / U.	P (Unit)
1	LT E1 KS BW	140.51	10
2	LT E2 KS BW	150.93	10




Schlüter®-LIPROTEC-E			
switch (transmitter), brushed stainless steel			
Number of buttons	Art. No.	£ / U.	P (Unit)
1	LT E1 KS EB	135.32	10
2	LT E2 KS EB	137.38	10





Central control with master/slave technology

In addition to reliable radio control, you can now also control larger illuminated profile technology installations via master/slave technology. The range of components includes reliable power supply units, intelligent master/slave receivers and elegant switches that transmit commands wirelessly to the light installation. Only the connections between power supply units and receivers as well as interconnection between receivers (master/slave and slave/slave) is implemented with cables. As a result, 24 V LED strips can be installed to a length of 984 m, and controlled via a single, central radio transmitter.

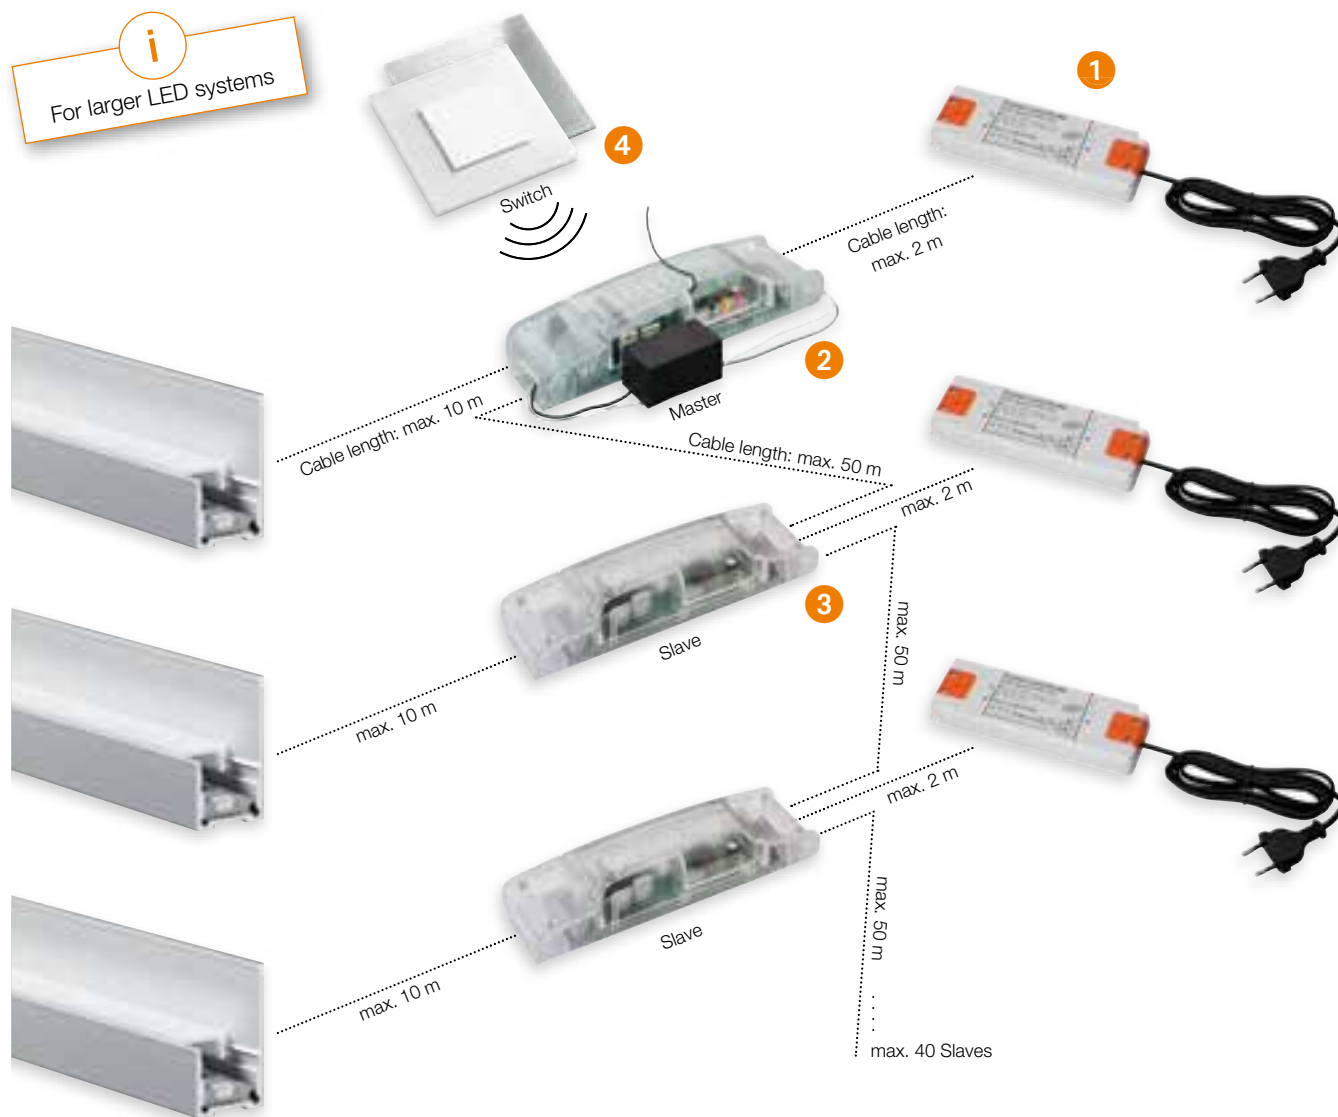

The principle: master/slave

The master/slave system enables the simultaneous control of several interconnected receivers over long distances (maximum of 200 m). For this purpose, a master receiver is connected via a 2-core AWG 16 cable with up to 40 slave receivers. The master receiver is taught-in together with the switch (transmitter), and slave receiver functionality follows the master receiver. This enables large installations with slave receivers far apart from each other to be centrally controlled with only one transmitter.


Schlüter®-LIPROTEC-ERM

Schlüter-LIPROTEC-ERM is a master receiver for the central control of large Schlüter-LIPROTEC light installations in accordance with the master/slave principle. The receiver forwards commands received from the radio transmitter to up to 40 slave receivers via a 2-core AWG 16 cable.

Schlüter®-LIPROTEC-ERM

LED master receiver, 24 V

Art. No.	£ / U.	P (Unit)
LT ERM 1	288.31	10

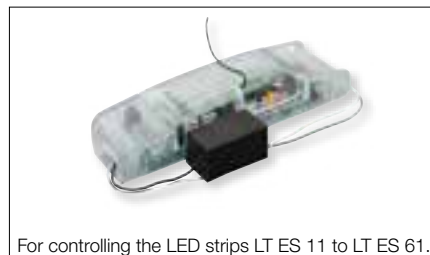

1 Schlüter®-LIPROTEC-EKE – Power supply units

The power supply units convert the mains voltage to 24 V, as required for the LED strips. The units are easy to install and available in various wattages from 30 to 200 W.

2 Schlüter®-LIPROTEC-ERM – Master receivers

Receivers transpose the wireless signals from the switch into commands for the LED strips. It is the first component in a light system.

- LT ERM 1 (on-off-dimming) for controlling white LED strips with permanent colour temperature (LT ES 11 – LT ES 61).

3 Schlüter®-LIPROTEC-ERS – Slave receivers

The slave receivers convert signals received from the master into commands for the LED strips. They are components installed downstream from the master and are interconnected in sequence. Slave receivers can only be controlled by the appropriate master receiver.

- LT ERS 1/3 (on-off-dimming) for the simultaneous control of white LED strips (LT ES 11 – LT ES 61).

The control line between master and slaves is a 2 x 1.31 mm² low voltage cable (AWG16).

4 Schlüter®-LIPROTEC-E – Switches (transmitters)

With the switches, the user can control the illuminated profile technology. The wireless control makes installation very easy. All switches (transmitters) are available in two different frame designs. You can choose between genuine glass, back-coated in brilliant white or brushed stainless steel (V4A).

The switches (transmitters) are available in the following versions:

- Single channel (on-off-dimming) for controlling white LED strips with fixed colour temperature together with LT ERM 1 master receiver.
- Dual channel (on-off-dimming) for simultaneous control of two LT ERM 1 master receivers with white LED strips and fixed colour temperature.

Technical data for the master/slave system**(specifications with 24 V LED strips from the LT ES 11 – LT ES 61 range)**

Radio frequency:	868.3 MHz
Input voltage:	24 V, DC
Max. total load in the LIPROTEC system:	180 W
Degree of protection:	IP20
Ambient temperature:	-20 °C to +50 °C

Max. possible length of LED strips in master/slave system

LED strips LT ES 11 – LT ES 61:	984 m
---------------------------------	-------



See page 71 for transmitters.

Schlüter®-LIPROTEC-ERS

Schlüter-LIPROTEC-ERS is a slave receiver for the central control of large Schlüter-LIPROTEC light installations in accordance with the master/slave principle. Up to 40 slave receivers can be controlled by a master receiver via a 2-core AWG 16 cable.

Schlüter®-LIPROTEC-ERS**LED slave receiver, 24 V**

Art. No.	£ / U.	P (Unit)
LT ERS 1/3	252.28	10



For controlling the LED strips LT ES 11 to LT ES 61.



Installation material

We also offer a complete range of accessories for the wiring installation of the Schlüter-LIPROTEC system. Schlüter-KERDI-BOARD installation modules with pre-cut cable ducts are an ideal practical solution. The two-part cable duct Schlüter-LIPROTEC-ZKK can be mounted in them by simply placing the cables inside from the front. There is no need to thread any wires through conduits. The closed cable duct can then be sealed with the Schlüter-KERDI-KEBA jointing band and Schlüter-KERDI-COLL-L sealing adhesive.

Schlüter®-LIPROTEC-ZK

Schlüter-LIPROTEC-ZK are colour-coded low voltage cables for connecting Schlüter-LIPROTEC LED strips to a suitable power supply unit and/or receiver.



2-core

5-core

Schlüter®-LIPROTEC-ZK

low voltage cable, 2 x 1.31 mm² (AWG16)

L (m)	Art. No.	£ / U.	P (Unit)
25	LT ZK 2A 10 25M	52.57	10

Cable for LED strips LT ES 11 – LT ES 61 and for connecting power supply and receiver.

Schlüter®-LIPROTEC-ZK

low voltage cable, 5 x 1.31 mm² (AWG16)

L (m)	Art. No.	£ / U.	P (Unit)
25	LT ZK 5A 10 25M	115.73	10

Cable for LED strips LT ES 9.

Schlüter®-LIPROTEC-ZS

Schlüter-LIPROTEC-ZS are connecting sets for connecting Schlüter-LIPROTEC installations to a suitable power supply unit and/or receiver.



2-core

5-core

Schlüter®-LIPROTEC-ZS

connection set, 2-core

Art. No.	£ / Set	P (Set)
LT ZS 2A	33.58	10

Connection set for LED strip LT ES 11 – LT ES 61. and for power supply unit and receiver connection.

Contents

- 1 x cable 800 cm, 2 x 1.31 mm² (AWG16)
- 1 x hollow wall junction box with lid
- 1 x concealed junction box with lid
- 2 x Wago terminals, 32 A, 5-core

Schlüter®-LIPROTEC-ZS

connection set, 5-core

Art. No.	£ / Set	P (Set)
LT ZS 5A	53.34	10

Connection set for LED strip LT ES 9.

Contents

- 1 x cable 800 cm, 5 x 1.31 mm² (AWG16)
- 1 x hollow wall junction box with lid
- 1 x concealed junction box with lid
- 5 x Wago terminals, 32 A, 3-core

Schlüter®-LIPROTEC-ZLR

Schlüter®-LIPROTEC-ZLR			
empty tube, 20 mm diameter			
L (m)	Art. No.	£ / U.	P (Unit)
50	LT ZLR 20 50M	78.92	10


Schlüter®-LIPROTEC-ZKK

Schlüter®-LIPROTEC-ZKK			
cable duct, white			
L (m)	Art. No.	£ / U.	P (Unit)
2.5	LT ZKK 2010	3.69	10



Schlüter®-LIPROTEC-PES

Schlüter®-LIPROTEC-PES			
end caps for LT-EASY LED tubes			
H (mm)	Art. No.	£ / Set	P (Set)
12	EK / LT PES 1	3.98	10
15	EK / LT PES 9	4.46	10



The set contains two end caps, incl. sealing adhesive.

Schlüter®-LIPROTEC-Z

Schlüter®-LIPROTEC-Z				
wall junction box with lid, set = 5 units				
H (mm)	Ø mm	Art. No.	£ / Set	P (Set)
47	68	LT Z 5HD 47	14.74	10

Schlüter®-LIPROTEC-Z				
wall junction box with lid, set = 5 units				
H (mm)	Ø mm	Art. No.	£ / Set	P (Set)
47	68	LT Z 5HDD 47	68.93	10



Schlüter®-LIPROTEC-Z				
concealed junction box with lid, set = 5 units				
H (mm)	Ø mm	Art. No.	£ / Set	P (Set)
46	65	LT Z 5UD 46	11.06	10

Schlüter®-LIPROTEC-Z			
concealed junction box with cover, set = 5 units			
L x B x H (mm)	Art. No.	£ / Set	P (Set)
87 x 87 x 60	LT Z 5UK 60	39.45	10

Schlüter®-LIPROTEC-ZKL


Schlüter®-LIPROTEC-ZKL				
Wago terminals				
Cores	Package (Units)	Art. No.	£ / Package	P (Package)
3	50	LT ZKL 1 3A	38.47	10
5	25	LT ZKL 1 5A	31.35	10



Schlüter®-KERDI-BOARD-K

Schlüter-KERDI-BOARD-K are installation modules with pre-cut grooves for accommodating Schlüter-LIPROTEC cable ducts. The groove is designed to also accommodate a 19 mm Schlüter-KERDI-BOARD or the Schlüter-LIPROTEC-LL carrier profile.
(Product data sheet 12.1)

Schlüter®-KERDI-BOARD-K			
installation module with cable groove, 15 x 250 cm			
H (mm)	Art. No.	£ / U.	PL (Unit)
19	KB 19 150 2500 K1	15.19	10
28	KB 28 150 2500 K1	18.04	10

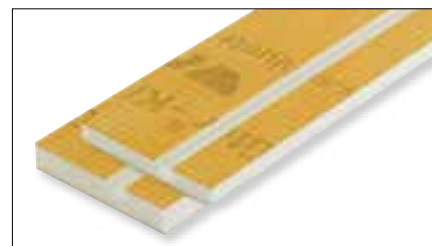

Schlüter®-DESIGNBASE-HVL			
self-adhesive bonding fleece			
B (mm)	L = 20 m Art. No.	£ / U.	P (Unit)
38	HVL 38 / 20M	26.52	10
75	HVL 75 / 20M	53.41	10

Schlüter®-LIPROTEC-RKB			
self-adhesive reflector tape			
B (mm)	L = 50 m Art. No.	£ / U.	P (Unit)
38	LT Z RKB 38 50M	5.27	10



Schlüter®-PROCUT-PSF

Schlüter-PROCUT-PSF is a special cutting tool for precisely cutting LED tubes to size. To ensure that the LED strip retains IP-compliant tightness when it is shortened, it has to be cut at a 45° angle and sealed with the end caps and sealing adhesive included in the set.


Schlüter®-PROCUT-PSF		
profile cutter, joint spacer		
Art. No.	£ / U.	P (Unit)
PSF	57.27	10





PLAN

Good planning is the prerequisite for a project's success. The PLAN section contains all the information needed to plan your LIPROTEC projects and ensure their success – from detailed dimensions of the profile to the photometric data of our LED light strips.

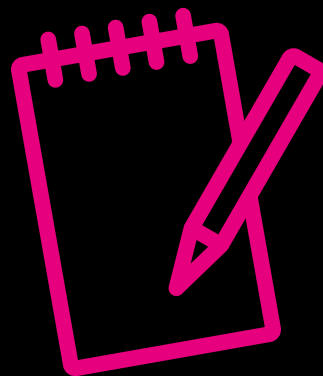

FOR YOUR LIGHT PLANNING
Light data for LIPROTEC-EASY now available
on www.lumsearch.com – Keyword: "Fliese"

LUMsearch **DIALux**



LED NICHE SETS

Page

NLT / NLT-BR – Niche, LED coloured + white, plug-and-play compatible

SET

78

LED MODULES

LLP – Linear light, plug-and-play LED module, coloured

MODULE

78

LLPM – Linear light, plug-and-play LED module, coloured + white

MODULE

80

LLPE – Linear light, plug-and-play LED module, wall corner, coloured

MODULE

80

LED NICHE SETS AND LED MODULES

LIPROTEC-EASY clamping diagrams

94

LED PROFILES

LL – Linear light, coloured + white

82

LLE – Linear light, wall corner, coloured + white

82

WS – Wall panel lighting, coloured + white

84

WSK – Wall panel lighting with cable duct, coloured + white

SET

84/90

WSQ – Wall panel lighting with QUADEC finishing profile, coloured + white

86

PB – Stair edge lighting, white

SET

86/92

DESIGNBASE-QD – Landing/border profile, white

88

VB – Skirting/cove lighting

88

D – Carrier profile for mirror and other decors

SET

90/92

LEGEND

Explanations of properties / areas of application

99











FIND OUT MORE AT:

WWW.LIPROTEC.CO.UK











Schlüter®-KERDI-BOARD-NLT/-NLT-BR

Schlüter-KERDI-BOARD-NLT/-NLT-BR are prefabricated niche sets made of KERDI-BOARD with plug-and-play LIPROTEC-LED technology. They are used to create illuminated niches and storage surfaces for wall areas. These niches can be integrated into the Schlüter-KERDI waterproofing system as a bonded waterproofing assembly. The niches are available in different dimensions and lighting options. The rectangular niches are available with illumination either on the long or the narrow side. The LED module can either be positioned at the front edge, in the centre or at the rear of the wall that is to be tiled. The niches are available both with or without Bluetooth control. We recommend using a standard switch for convenience. (Product data sheet 12.2)

NICHES	APPLICATION AREA	PROPERTIES	DIMENSIONS			
B x H x T (mm)			VERSION	LED LENGTHS (mm)	LIGHT COLOUR	
305 x 305 x 89	 	   	WARM WHITE/ NEUTRAL WHITE 	300	warm white	
305 x 508 x 89					neutral white	
305 x 711 x 89					RGB+W	
508 x 305 x 89			RGB+W 	505	warm white	
					neutral white	
					RGB+W	
711 x 305 x 89				705	warm white	
					neutral white	
					RGB+W	



Schlüter®-LIPROTEC-LLP

Schlüter-LIPROTEC-LLP are LED modules consisting of a fully encased LED strip with homogenous light dispersion and a U-shaped carrier profile made of aluminium. With the LED modules, coloured RGB+W light strips with more than 16 million different hues and colour temperatures of 2500 K – 6500 K can be created. The carrier profile with an installation height of 17 mm makes flush installation possible. (Product data sheet 15.8)

PROFILES / TYPE OF LIGHT	APPLICATION AREA	PROPERTIES	DIMENSIONS OF LED MODULE	
			WIDTH / HEIGHT (mm)	LENGTH (cm)
RGB+W 	ALUMINIUM   	  		50
				100
				200
				250


Exact lengths: 50.5 cm, 100.2 cm, 200 cm and 250 cm

Length of supply line: 12 cm with plug connector



PHOTOMETRIC DATA								
RATED OUTPUT (W/Unit)	NUMBER OF LEDS (LEDs/m)	CRI	COLOUR TEMPERATURE (Kelvin)	LIGHT CURRENT (lm)	EEC	kWh / 1000h	DEGREE OF PROTECTION	LIGHT DIRECTIONS
1.60	280	92	3000	80	A+	2	IP67	WARM WHITE/ NEUTRAL WHITE
1.60	280	92	4900	84	A+	2		
4.40	112	90	2700	156	A	5		
2.60	280	92	3000	133	A+	3		
2.60	280	92	4900	141	A+	3		
7.30	112	90	2700	262	A	8		
3.50	280	92	3000	187	A	4		
3.50	280	92	4900	197	A+	4		
10.10	112	90	2700	364	A	11		

The specified light current refers to the entire light-emitting surface of the LED tube and may be reduced in the installed state, depending on the profile material and geometry.



DIALux LUMsearch

PHOTOMETRIC DATA								
RATED OUTPUT (W/m)	NUMBER OF LEDS (LEDs/m)	CRI	COLOUR TEMPERATURE (Kelvin)	LIGHT CURRENT (lm/m)	EEC	kWh / 1000h	DEGREE OF PROTECTION	LIGHT DIRECTIONS
15	112	90	2700	323	A	8	IP67	
				323	B	16		
				323	B	31		
				323	B	38		

Note: LED strips can be shortened every 62.5 mm.






















Max. length of aligned LED modules in the LIPROTEC-EASY system: 6 m

The specified energy efficiency classes refer to the light-emitting surface of the LED tube. This surface is determined by the profile geometry.



Schlüter®-LIPROTEC-LLPM

Schlüter-LIPROTEC-LLPM are plug-and-play LED modules consisting of a fully encased LED strip with homogenous light dispersion and a carrier profile made of aluminium or brushed stainless steel V4A with trapezoid perforated anchoring leg. The LED modules are available either with a fixed white-light colour temperature of 3000 K or 4900 K, or with a RGB+W colour range. The latter makes it possible to choose from more than 16 million hues and colour temperatures from 2500 K – 6500 K. The white LED module is available with an installation height of 11 mm, which means it can be installed flush with the tile thickness. (*Product data sheet 15.8*)








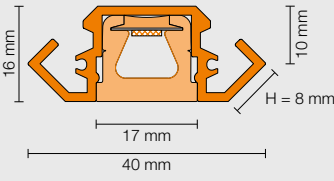
PROFILES / TYPE OF LIGHT	APPLICATION AREA		PROPERTIES	DIMENSIONS OF LED MODULE	
	ALUMINIUM	V4A		WIDTH / HEIGHT (mm)	LENGTH (cm)
 WARM WHITE/ NEUTRAL WHITE		 		ALUMINIUM 	50
		 		V4A 	100
		 			200
					250
 RGB+W				ALUMINIUM 	50
				V4A 	100
					200
					250

Exact lengths: 50.5 cm, 100.2 cm, 200 cm and 250 cm


Length of supply line: 12 cm with plug connector

Schlüter®-LIPROTEC-LLPE





Schlüter-LIPROTEC-LLPE are LED modules consisting of a fully encased LED strip with homogenous light dispersion and a carrier profile made of anodised aluminium. The LED module with RGB+W coloured light range makes it possible to choose from more than 16 million different hues and colour temperatures from 2500 K – 6500 K. With the LED module, accent lighting can be created at wall corners. It is suitable for use in internal and external corners in the shower, preferably positioned vertically. (*Product data sheet 15.8*)

PROFILES / TYPE OF LIGHT	APPLICATION AREA	PROPERTIES	DIMENSIONS OF LED MODULE	
	ALUMINIUM		WIDTH / HEIGHT (mm)	LENGTH (cm)
 RGB+W	  	  		250

Length of supply line: 12 cm with plug connector

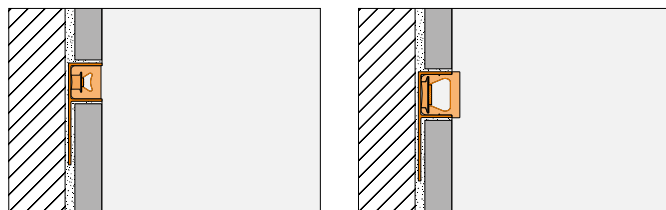


DIALux LUMsearch

	PHOTOMETRIC DATA									
	RATED OUTPUT (W/m)	NUMBER OF LEDS (LEDs/m)	CRI	COLOUR TEMPERATURE (Kelvin)	LIGHT CURRENT (lm/m)	EEC	kWh / 1000h	DEGREE OF PROTECTION	LIGHT DIRECTIONS	
	5	280	92	3000 / 4900	242 / 274	A+ / A+	3 / 3	IP67		
					242 / 274	A / A	6 / 6			
					242 / 274	A / A	12 / 12			
					242 / 274	A / A	15 / 15			
	15	112	90	2700	375	A	8			
					375	B	16			
					375	B	31			
					375	B	38			



Note: LED strips can be shortened every 25 mm (warm white/neutral white) or 62.5 mm (RGB+W).

Max. length of aligned LED modules in the LIPROTEC-EASY System: RGB+W = 6 m, white = 18 m

The specified light current refers to the entire light-emitting surface of the LED tube and may be reduced in the installed state, depending on the profile material and geometry.

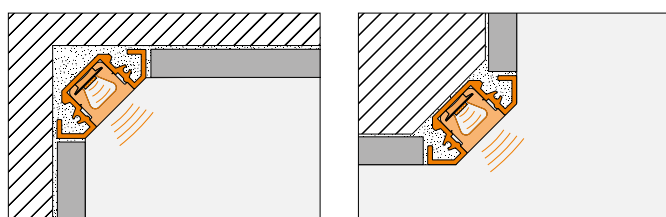

DIALux LUMsearch

	PHOTOMETRIC DATA									
	RATED OUTPUT (W/m)	NUMBER OF LEDS (LEDs/m)	CRI	COLOUR TEMPERATURE (Kelvin)	LIGHT CURRENT (lm/m)	EEC	kWh / 1000h	DEGREE OF PROTECTION	LIGHT DIRECTIONS	
	15	112	90	2700	323	B	38	IP67		

Note: LED strips can be shortened every 62.5 mm.






Max. length of aligned LED modules in the LIPROTEC-EASY system: 6 m

The specified energy efficiency classes refer to the light-emitting surface of the LED tube. This surface is determined by the profile geometry.



Schlüter®-LIPROTEC-LL






Schlüter-LIPROTEC-LL is a high-quality, anodised aluminium carrier profile for creating accent lighting in wall coverings and ceilings. The illumination is provided by Schlüter-LIPROTEC-ES LED strips laid into the U-shaped profile, in combination with the corresponding diffuser lens. Various direct or indirect light effects are created according to the positioning of the profile. (Product data sheet 15.5)

PROFILES / TYPE OF LIGHT	APPLICATION AREA	PROPERTIES	PROFILE DIMENSIONS		DIMENSIONS LED STRIPS	
	ALUMINIUM		WIDTH / HEIGHT (mm)	LENGTH (m)	LENGTH (cm)	
WARM WHITE/ NEUTRAL WHITE	<div></div> <div>Vertical installation only</div> <div></div> <div></div>	<div></div> <div>IP67</div>	<div></div>	2.5	50	
					100	
					150	
					200	
					250	
400						
50						
100						
150						
200						
250						
400						
RGB+W						



Supply line: 3 m. The 400 cm LED strips are equipped with two supply lines each. The photometric data describes the LED strips only. The optical efficiency is influenced by the properties of the diffuser lens.

Schlüter®-LIPROTEC-LLE

Schlüter-LIPROTEC-LLE is a high-quality carrier profile made of anodised or white coated aluminium for mounting the Schlüter-LIPROTEC-ES LED strips. The profile is designed to create accent lighting in wall corners. It is suitable for use in internal and external corners in horizontal or vertical alignment. With the use of the respective pre-fabricated parts, it can also be installed continuously around corners. The profile can either be simply attached to any suitable substrate with a clip system or is embedded in the tile adhesive. For lighting, the selected LIPROTEC-ES LED strip is adhered within the profile and covered with the corresponding diffuser lens. (Product data sheet 15.7)



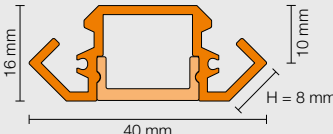
PROFILES / TYPE OF LIGHT	APPLICATION AREA	PROPERTIES	DIMENSIONS PROFILE DIMENSIONS		DIMENSIONS LED STRIPS					
	ALUMINIUM		WIDTH / HEIGHT (mm)	LENGTH (m)	LENGTH (cm)					
WARM WHITE/ NEUTRAL WHITE	<div></div> <div>Vertical installation only</div> <div></div> <div></div>	<div></div> <div>IP67</div>		2.5	50					
					100					
					150					
					200					
					250					
400										
RGB+W									50	
									100	
									150	
									200	
									250	
									400	

Supply line: 3 m. The 400 cm LED strips are equipped with two supply lines each. The photometric data describes the LED strips only. The optical efficiency is influenced by the properties of the diffuser lens.



PHOTOMETRIC DATA									
RATED OUTPUT (W/m)	NUMBER OF LEDS (LEDs/m)	CRI	COLOUR TEMPERATURE (Kelvin)	LIGHT CURRENT (lm/m)	EEC	kWh / 1000h	DEGREE OF PROTECTION	LIGHT DIRECTIONS	
7.5	140	92	3400 / 4900	683 / 664	A++/A++	5 / 5	IP67		
				673 / 662	A+ / A+	9 / 9			
				670 / 627	A+ / A+	13 / 13			
				668 / 621	A+ / A+	17 / 17			
				662 / 623	A+ / A+	20 / 20			
				660 / 621	A+ / A+	32 / 33			
15.0	192 (96 RGB + 96 W)	85	2700	720	A	8			
				720	A	16			
				700	A	22			
				700	A	26			
				660	A	33			
				679	A	57			

Note: LED strips can be shortened every 50 mm (warm white/neutral white) or 62.5 mm (RGB+W).
The specified energy efficiency classes exclusively refer to the LED strip.












PHOTOMETRIC DATA									
RATED OUTPUT (W/m)	NUMBER OF LEDS (LEDs/m)	CRI	COLOUR TEMPERATURE (Kelvin)	LIGHT CURRENT (lm/m)	EEC	kWh / 1000h	DEGREE OF PROTECTION	LIGHT DIRECTIONS	
7.5	140	92	3400 / 4900	683 / 664	A++/A++	5 / 5	IP67		
				673 / 662	A+ / A+	9 / 9			
				670 / 627	A+ / A+	13 / 13			
				668 / 621	A+ / A+	17 / 17			
				662 / 623	A+ / A+	20 / 20			
				660 / 621	A+ / A+	32 / 33			
15.0	192 (96 RGB + 96 W)	85	2700	720	A	8			
				720	A	16			
				700	A	22			
				700	A	26			
				660	A	33			
				679	A	57			

Note: LED strips can be shortened every 50 mm (warm white/neutral white) or 62.5 mm (RGB+W).
The specified energy efficiency classes exclusively refer to the LED strip.



Schlüter®-LIPROTEC-WS






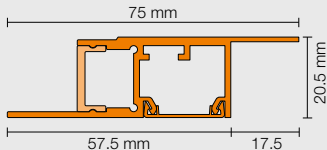

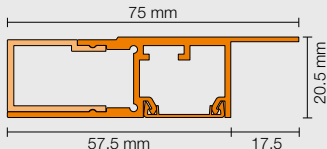
Schlüter-LIPROTEC-WS is a high-quality carrier profile of anodised aluminium for illuminating protruding wall panels with various Schlüter-LIPROTEC-ES LED strips integrated into the profile. Differing light effects are created in combination with two different diffuser lenses. The assembly can be used to create recessed direct or indirect lighting for on-wall structures. The profile design allows for the easy replacement of the utilised diffuser lenses and bulbs, including after installation. *(Product data sheet 15.2)*

PROFILES / TYPE OF LIGHT	APPLICATION AREA	PROPERTIES	PROFILE DIMENSIONS		DIMENSIONS LED STRIPS		
	ALUMINIUM		WIDTH / HEIGHT (mm)	LENGTH (m)	LENGTH (cm)		
WARM WHITE/ NEUTRAL WHITE	<div> Vertical installation only</div> <div> IP67</div> <div> </div>	 IP67	INDIRECT	1	50		
					100		
					150		
					200		
					1.5		250
							400
RGB+W			DIRECT	2.5			50
							100
					150		
					200		
							250
							400
			Not in the shower				



Supply line: 3 m. The 400 cm LED strips are equipped with two supply lines each. The photometric data describes the LED strips only. The optical efficiency is influenced by the properties of the diffuser lens.

Schlüter®-LIPROTEC-WSK

Schlüter-LIPROTEC-WSK is a high-quality, anodised aluminium carrier profile for illuminating protruding wall panels with various Schlüter-LIPROTEC-ES LED strips laid into the profile. Differing light effects are created in combination with two different diffuser lenses. Recessed, indirect or narrow illumination for wall protrusions are created in this way. An integrated cable duct with milling grooves for cable installation and a support bracket for Schlüter-KERDI-BOARD (19 mm) aid the installation process. *(Product data sheet 15.2)*

PROFILES / TYPE OF LIGHT	APPLICATION AREA	PROPERTIES	PROFILE DIMENSIONS		DIMENSIONS LED STRIPS			
	ALUMINIUM		WIDTH / HEIGHT (mm)	LENGTH (m)	LENGTH (cm)			
WARM WHITE/ NEUTRAL WHITE	<div></div> <div>Vertical installation only</div> <div></div> <div></div>	<div></div> <div>IP67</div>	INDIRECT	2.5	50			
					100			
					150			
					200			
					250			
					400			
RGB+W						DIRECT	50	
					100			
					150			
					200			
					250			
					400			
			Not in the shower					



Supply line: 3 m. The 400 cm LED strips are equipped with two supply lines each. The photometric data describes the LED strips only. The optical efficiency is influenced by the properties of the diffuser lens.



PHOTOMETRIC DATA

RATED OUTPUT (W/m)	NUMBER OF LEDs (LEDs/m)	CRI	COLOUR TEMPERATURE (Kelvin)	LIGHT CURRENT (lm/m)	EEC	kWh / 1000h	DEGREE OF PROTECTION	LIGHT DIRECTIONS	
7.5	140	92	3400 / 4900	683 / 664	A++/A++	5 / 5	IP67	INDIRECT	
				673 / 662	A+ / A+	9 / 9			
				670 / 627	A+ / A+	13 / 13			
				668 / 621	A+ / A+	17 / 17			
				662 / 623	A+ / A+	20 / 20			
				660 / 621	A+ / A+	32 / 33			
15	192 (96 RGB + 96 W)	85	2700	720	A	8		DIRECT	
				720	A	16			
				700	A	22			
				700	A	26			
				660	A	33			
				679	A	57			

Note: LED strips can be shortened every 50 mm (warm white/neutral white) or 62.5 mm (RGB+W).
The specified energy efficiency classes exclusively refer to the LED strip.



PHOTOMETRIC DATA









RATED OUTPUT (W/m)	NUMBER OF LEDs (LEDs/m)	CRI	COLOUR TEMPERATURE (Kelvin)	LIGHT CURRENT (lm/m)	EEC	kWh / 1000h	DEGREE OF PROTECTION	LIGHT DIRECTIONS	
7.5	140	92	3400 / 4900	683 / 664	A++/A++	5 / 5	IP67	INDIRECT	
				673 / 662	A+ / A+	9 / 9			
				670 / 627	A+ / A+	13 / 13			
				668 / 621	A+ / A+	17 / 17			
				662 / 623	A+ / A+	20 / 20			
				660 / 621	A+ / A+	32 / 33			
15	192 (96 RGB + 96 W)	85	2700	720	A	8		DIRECT	
				720	A	16			
				700	A	22			
				700	A	26			
				660	A	33			
				679	A	57			

Note: LED strips can be shortened every 50 mm (warm white/neutral white) or 62.5 mm (RGB+W).
The specified energy efficiency classes exclusively refer to the LED strip.



Schlüter®-LIPROTEC-WSQ

Schlüter-LIPROTEC-WSQ is a high-quality carrier profile of anodised aluminium for illuminating raised wall panels with various Schlüter-LIPROTEC-ES LED strips integrated into the profile. Differing light effects are created in combination with two different diffuser lenses. The assembly can be used to create recessed direct or indirect lighting for on-wall structures. LIPROTEC-WSQ features a formed cover finish with timelessly modern Schlüter-QUADEC design. The profile design allows for the easy replacement of the utilised diffuser lenses and bulbs, even after installation. (Product data sheet 15.2)

PROFILES / TYPE OF LIGHT	APPLICATION AREA	PROPERTIES	PROFILE DIMENSIONS		DIMENSIONS LED STRIPS				
	ALUMINIUM		WIDTH / HEIGHT (mm)	LENGTH (m)	LENGTH (cm)				
WARM WHITE/ NEUTRAL WHITE	<div></div> <div>Vertical installation only</div> <div></div> <div></div>	<div></div> <div>IP67</div>	INDIRECT	2.5	50				
					100				
					150				
					200				
					250				
					400				
RGB+W						DIRECT		50	
								100	
								150	
								200	
								250	
								400	
			Not in the shower						



Supply line: 3 m. The 400 cm LED strips are equipped with two supply lines each. The photometric data describes the LED strips only. The optical efficiency is influenced by the properties of the diffuser lens.

Schlüter®-LIPROTEC-PB

Schlüter-LIPROTEC-PB is a high-quality edge profile of anodised aluminium with a visible area of 25 mm. It is designed for mounting Schlüter-LIPROTEC-ES LED strips and can be used with Schlüter-TREP stair nosing profiles to create appealing lighting along the edges of platforms. Differing light effects are created in combination with two different diffuser lenses. Edges can either be illuminated indirectly or directly by adding a 3 mm light strip. Another application area of LIPROTEC-PB is the direct or indirect illumination of work surface front edges. The profile design allows for the easy replacement of the utilised diffuser lenses and bulbs, including after installation. (Product data sheet 15.4)



PROFILES / TYPE OF LIGHT	APPLICATION AREA	PROPERTIES	PROFILE DIMENSIONS		DIMENSIONS LED STRIPS	
	ALUMINIUM		WIDTH / HEIGHT (mm)	LENGTH (m)	LENGTH (cm)	
WARM WHITE / NEUTRAL WHITE		 IP65	INDIRECT 	1	50	
					100	
			DIRECT 	1.5	150	
					200	
				2.5	250	
					400	

Supply line: 3 m. The 400 cm LED strips are equipped with two supply lines each. The photometric data describes the LED strips only. The optical efficiency is influenced by the properties of the diffuser lens.



	PHOTOMETRIC DATA									
	RATED OUTPUT (W/m)	NUMBER OF LEDS (LEDs/m)	CRI	COLOUR TEMPERATURE (Kelvin)	LIGHT CURRENT (lm/m)	EEC	kWh / 1000h	DEGREE OF PROTECTION	LIGHT DIRECTIONS	
	7.5	140	92	3400 / 4900	683 / 664	A++/A++	5 / 5	IP67	INDIRECT	
					673 / 662	A+ / A+	9 / 9			
					670 / 627	A+ / A+	13 / 13			
					668 / 621	A+ / A+	17 / 17			
					662 / 623	A+ / A+	20 / 20			
					660 / 621	A+ / A+	32 / 33			
	15	192 (96 RGB + 96 W)	85	2700	720	A	8		DIRECT	
					720	A	16			
					700	A	22			
					700	A	26			
					660	A	33			
					679	A	57			

Note: LED strips can be shortened every 50 mm (warm white/neutral white) or 62.5 mm (RGB+W).
The specified energy efficiency classes exclusively refer to the LED strip.



	PHOTOMETRIC DATA									
	RATED OUTPUT (W/m)	NUMBER OF LEDS (LEDs/m)	CRI	COLOUR TEMPERATURE (Kelvin)	LIGHT CURRENT (lm/m)	EEC	kWh / 1000h	DEGREE OF PROTECTION	LIGHT DIRECTIONS	
	7.5	140	92	3200 / 4900	616 / 625	A+ / A+	5 / 5	IP65	INDIRECT	
					602 / 616	A+ / A+	9 / 9			
					588 / 602	A+ / A+	13 / 13			
					574 / 588	A / A+	17 / 17			
					560 / 574	A / A	20 / 20			
					588 / 602	A / A	33 / 33			









Note: LED strips can be shortened every 50 mm (warm white/neutral white).
The specified energy efficiency classes exclusively refer to the LED strip.



Schlüter®-DESIGNBASE-QD

Schlüter-DESIGNBASE-QD is a high-quality profile of anodised aluminium for versatile applications. It is designed for mounting various Schlüter-LIPROTEC-ES LED strips as a skirting or border profile in wall areas. A 39 mm diffuser lens is then used between the approx. 10 mm wide visible areas of the profile to create direct illumination. Other decorative materials such as tiles or wooden elements can also be inserted in the open space. The profile design allows for the easy replacement of the utilised diffuser lenses and bulbs, even after installation.

(Product data sheet 16.1)






PROFILES / TYPE OF LIGHT	APPLICATION AREA	PROPERTIES	PROFILE DIMENSIONS		DIMENSIONS LED STRIPS	
	ALUMINIUM		WIDTH / HEIGHT (mm)	LENGTH (m)	LENGTH (cm)	
WARM WHITE / NEUTRAL WHITE 	 Vertical installation only  	 IP67  		2.5	50	
					100	
					150	
					200	
					250	
					400	

Supply line: 3 m. The 400 cm LED strips are equipped with two supply lines each. The photometric data describes the LED strips only. The optical efficiency is influenced by the properties of the diffuser lens.




Schlüter®-LIPROTEC-VB

Schlüter-LIPROTEC-VB is a high-quality tile finishing profile for wall areas, with a visible area of 25 mm. It is designed for mounting Schlüter-LIPROTEC-ES LED strips and can be used to create varying light effects in combination with two different diffuser lenses. Indirect light can either radiate from the profile edge to the ceiling via adjoining materials or along the skirting. Additionally, a 3 mm light strip can create direct light. The profile design allows for the easy replacement of the utilised diffuser lenses and bulbs, even after installation.

(Product data sheet 15.1)



PROFILES / TYPE OF LIGHT	APPLICATION AREA	PROPERTIES	PROFILE DIMENSIONS		DIMENSIONS LED STRIPS		
	ALUMINIUM		WIDTH / HEIGHT (mm)		LENGTH (m)	LENGTH (cm)	
WARM WHITE / NEUTRAL WHITE 		 IP65	INDIRECT 	DIRECT 	1	50	
						100	
			1.5	150			
				200			
			2.5	250			
				400			

Supply line: 3 m. The 400 cm LED strips are equipped with two supply lines each. The photometric data describes the LED strips only. The optical efficiency is influenced by the properties of the diffuser lens.



PHOTOMETRIC DATA									
	RATED OUTPUT (W/m)	NUMBER OF LEDS (LEDs/m)	CRI	COLOUR TEMPERATURE (Kelvin)	LIGHT CURRENT (lm/m)	EEC	kWh / 1000h	DEGREE OF PROTECTION	LIGHT DIRECTIONS
	7.5	140	92	3400 / 4900	683 / 664	A++/A++	5 / 5	IP67	
					687 / 662	A+ / A+	9 / 9		
					669 / 627	A+ / A+	13 / 13		
					665 / 621	A+ / A+	17 / 17		
					652 / 623	A+ / A+	20 / 20		
					665 / 621	A+ / A+	32 / 33		

Note: LED strips can be shortened every 50 mm (warm white/neutral white).
The specified energy efficiency classes exclusively refer to the LED strip.








PHOTOMETRIC DATA									
	RATED OUTPUT (W/m)	NUMBER OF LEDS (LEDs/m)	CRI	COLOUR TEMPERATURE (Kelvin)	LIGHT CURRENT (lm/m)	EEC	kWh / 1000h	DEGREE OF PROTECTION	LIGHT DIRECTIONS
	7.5	140	92	3200 / 4900	616 / 625	A+ / A+	5 / 5	IP65	
					602 / 616	A+ / A+	9 / 9		
					588 / 602	A+ / A+	13 / 13		
					574 / 588	A / A+	17 / 17		
					560 / 574	A / A	20 / 20		
					588 / 602	A / A	33 / 33		

Note: LED strips can be shortened every 50 mm (warm white/neutral white).
The specified energy efficiency classes exclusively refer to the LED strip.



Schlüter®-LIPROTEC-D






Schlüter-LIPROTEC-D is a decorative carrier profile for wall areas of anodised aluminium with a visible area of 6 mm. It allows for the insertion of various decorative materials such as glass or mirrors to adjoin ceramic tile coverings. LIPROTEC-D can be used to mount Schlüter-LIPROTEC-ES LED strips for creating indirect light effects around a decorative element. The profile design allows for the easy replacement of the utilised diffuser lenses and bulbs, even after installation. (*Product data sheet 15.3*)

PROFILES / TYPE OF LIGHT	APPLICATION AREA	PROPERTIES	PROFILE DIMENSIONS		DIMENSIONS LED STRIPS	
	ALUMINIUM		WIDTH / HEIGHT (mm)	LENGTH (m)	LENGTH (cm)	
WARM WHITE / NEUTRAL WHITE 		  IP65		2.5	50	
					100	
					150	
					200	
					250	
					400	



Supply line: 3 m. The 400 cm LED strips are equipped with two supply lines each. The photometric data describes the LED strips only. The optical efficiency is influenced by the properties of the diffuser lens.

Wall panel sets (WSK)

The wall panel sets with RGB+W light makes it easy to make a big impression. Simply select between the wide (128.5 cm) and narrow (70 cm) wall panels and order the practical profile set with it. Our RGB+W technology provides you with unlimited design freedom: More than 16 million hues turn your rooms into colour-flooded leisure zones. White hues from 2500 K – 6500 K let your wall panels radiate the same light as your existing ceiling light. If desired, it can be controlled with a Bluetooth receiver. The matching Schlüter-Systems app can be downloaded for free from Google Play (Android™) or the Apple App Store (iOS).


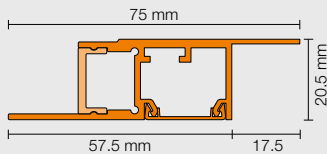
PROFILES / TYPE OF LIGHT	APPLICATION AREA	PROPERTIES	PROFILE DIMENSIONS		DIMENSIONS LED STRIPS	
	ALUMINIUM		WIDTH / HEIGHT (mm)	LENGTH (m)	LENGTH (cm)	
RGB+W 	  	SET	INDIRECT 	2.5	250	

Supply line: 3 m. The photometric data describes the LED strips only.



PHOTOMETRIC DATA									
RATED OUTPUT (W/m)	NUMBER OF LEDS (LEDs/m)	CRI	COLOUR TEMPERATURE (Kelvin)	LIGHT CURRENT (lm/m)	EEC	kWh / 1000h	DEGREE OF PROTECTION	LIGHT DIRECTIONS	
7.5	140	92	3200 / 4900	616 / 625	A+ / A+	5 / 5	IP65		
				602 / 616	A+ / A+	9 / 9			
				588 / 602	A+ / A+	13 / 13			
				574 / 588	A / A+	17 / 17			
				560 / 574	A / A	20 / 20			
				588 / 602	A / A	33 / 33			

Note: LED strips can be shortened every 50 mm (warm white/neutral white).
The specified energy efficiency classes exclusively refer to the LED strip.



PHOTOMETRIC DATA									
RATED OUTPUT (W/m)	NUMBER OF LEDS (LEDs/m)	CRI	COLOUR TEMPERATURE (Kelvin)	LIGHT CURRENT (lm/m)	EEC	kWh / 1000h	DEGREE OF PROTECTION	LIGHT DIRECTIONS	
15	192 (96 RGB + 96 W)	85	2700	660	A	33	IP67	INDIRECT 	

Note: LED strips can be shortened every 62.5 mm (RGB+W).
The specified energy efficiency classes exclusively refer to the LED strip.



Staircase sets (PB)

Schlüter-LIPROTEC-PB stair sets put light where it is needed: in the middle of the stair step. The PB 15 complete sets for 15 steps have 60 cm wide LED modules pre-mounted in the middle. With their diffuser lenses, they provide indirect illumination with a discreet line of light. The combinations of aluminium carrier profile and diffuser lens are 100/150 cm long and can be shortened individually as required. The LED modules have a 4500 K neutral white colour temperature and are cabled by means of a simple coupling system; a 500 cm connection cable and power supply are included in the set.

If that isn't enough: the stair set can easily be expanded to 18 steps with only one supply line. To this end, use the Schlüter-LIPROTEC-PB 1 single-step sets.

PROFILES / TYPE OF LIGHT	APPLICATION AREA	PROPERTIES	PROFILE DIMENSIONS		DIMENSIONS LED STRIPS	
	ALUMINIUM		WIDTH / HEIGHT (mm)	LENGTH (m)	LENGTH (cm)	
NEUTRAL WHITE			DIRECT 	1	60	
				1.5	60	
				1 (15 units)	60 (15 units)	
				1.5 (15 units)	60 (15 units)	

The photometric data describes the LED strips only.

Decorative frame sets (D)

Schlüter-LIPROTEC-D 90 are sets for creating illuminated decorative frames. With these complete sets, mirrors or design elements such as printed glass or decor panels can be elegantly framed with indirect LED lighting. The carrier profiles have already been mitred and four matching Schlüter-LIPROTEC-ES-LED strips with a colour temperature of 3200 K (warm white) or 4900 K (neutral white) are included in the set, as well as the power supply unit and all material for assembly and wiring.

PROFILES / TYPE OF LIGHT	APPLICATION AREA	PROPERTIES	PROFILE DIMENSIONS		DIMENSIONS LED STRIPS	
	ALUMINIUM		WIDTH / HEIGHT (mm)	LENGTH (m)	LENGTH (cm)	
S1 WARM WHITE				H = 9.0	1.185 / 0.935 (2 units)	110 / 85 (2 units)
S2 NEUTRAL WHITE						


Supply line: 3 m. The photometric data describes the LED strips only.




Schlüter-LIPROTEC-PB 15





Schlüter-LIPROTEC-PB 1



PHOTOMETRIC DATA									
RATED OUTPUT (W)	NUMBER OF LEDS (Unit)	CRI	COLOUR TEMPERATURE (Kelvin)	LIGHT CURRENT (lm/m)	EEC	kWh / 1000h	DEGREE OF PROTECTION	LIGHT DIRECTIONS	
3.7	72	80	4500	375	A+	4	IP20	DIRECT 	
					A	58			

Note: Single step sets are delivered with a 70 cm connecting cable.
Complete sets with 15 profiles are supplied with a 500 cm cable supply line and 14 x 70 cm connecting cables.
The specified energy efficiency classes exclusively refer to the LED strip.




PHOTOMETRIC DATA									
RATED OUTPUT (Set)	NUMBER OF LEDS (LEDs/m)	CRI	COLOUR TEMPERATURE (Kelvin)	LIGHT CURRENT (lm/m)	EEC	kWh / 1000h	DEGREE OF PROTECTION	LIGHT DIRECTIONS	
29,3	140	92	3200	595	A	33	IP65		
28,9			4900	609	A+	32			

Note: LED strips can be shortened every 50 mm (warm white/neutral white).
The specified energy efficiency classes exclusively refer to the LED strip.




LIPROTEC-EASY clamping diagrams


LED MODULES WW / NW

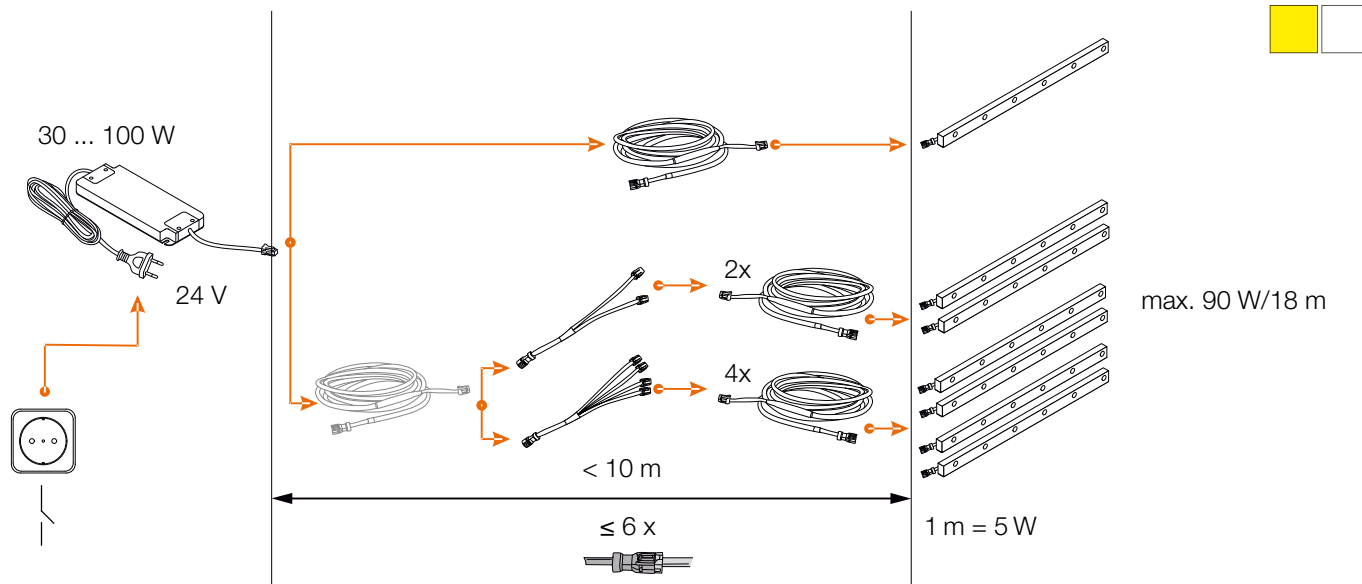

LED MODULES RGB+W

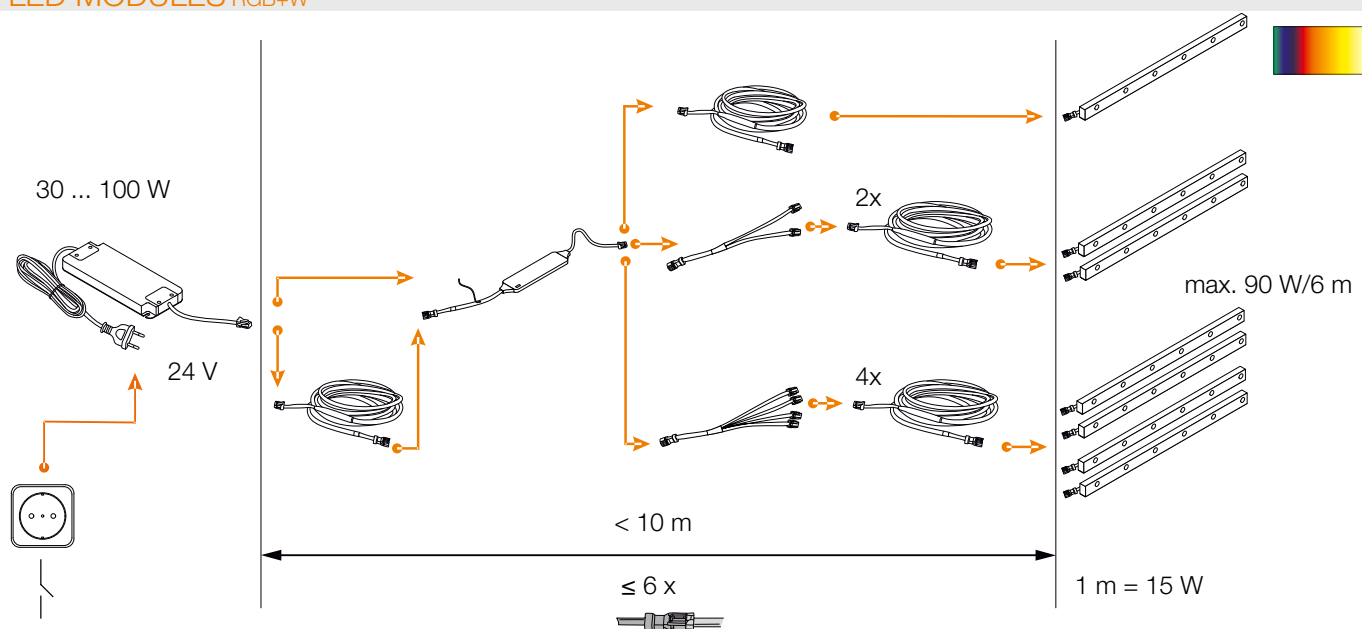


Note: Do not combine power supply units.

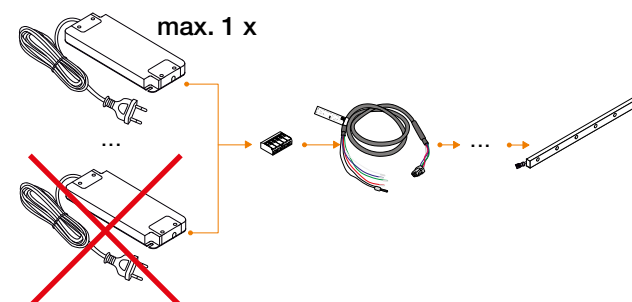


LIPROTEC-EASY and -PRO combination clamping diagrams using an adapter

LED MODULES WW / NW

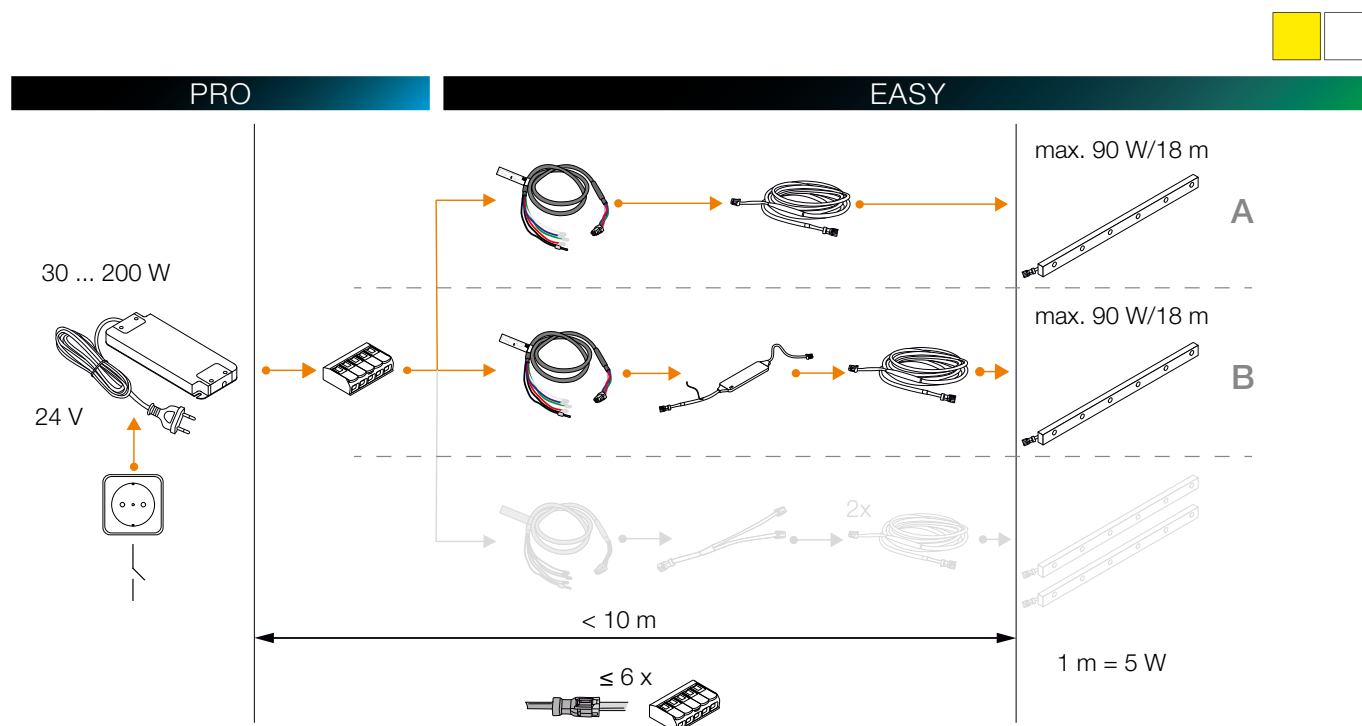

Note: Max. length of LED modules in a row in the LIPROTEC-EASY system when using the plug-and-play adapter: 18 m per cable strand (A or B) depending on the power supply unit used.

LED MODULES RGB+W

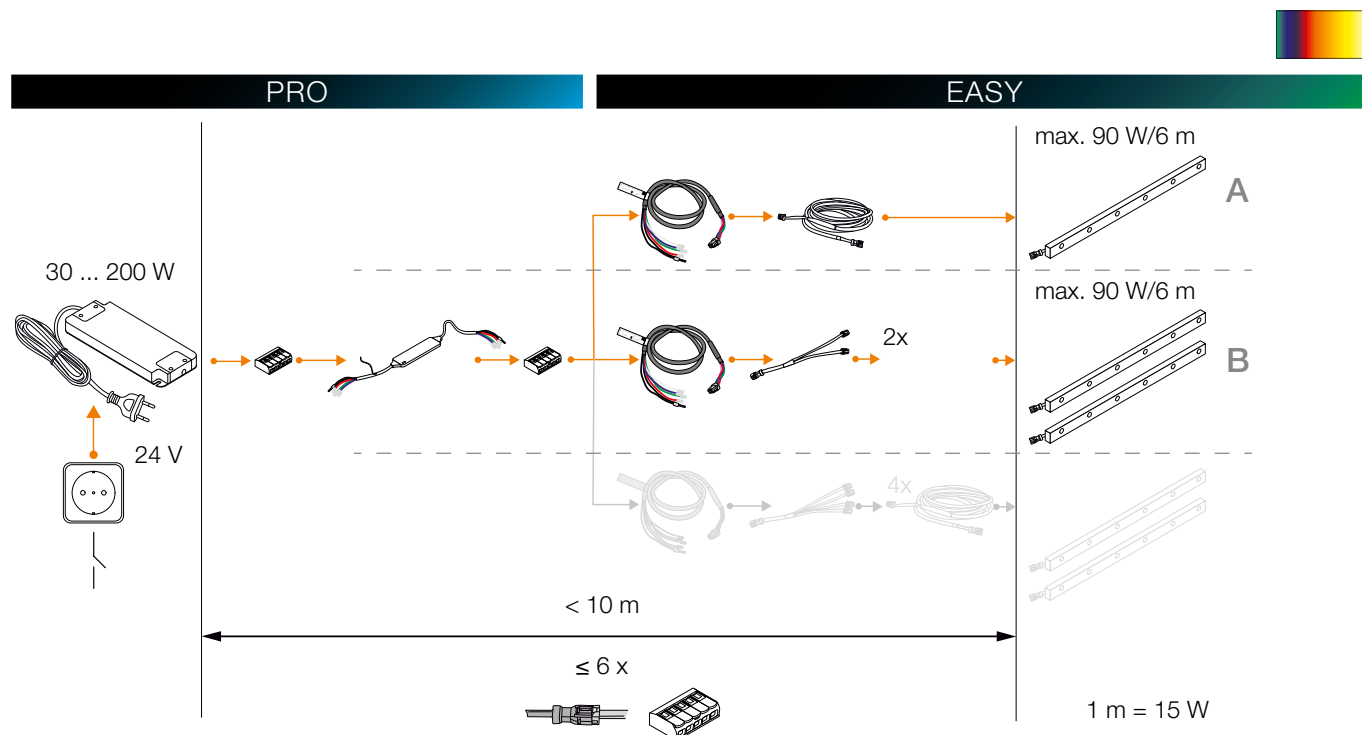

Note: Max. length of LED modules in a row in the LIPROTEC-EASY system when using the plug-and-play adapter: 6 m per cable strand (A or B) depending on the power supply unit used.



Schlüter-LIPROTEC application areas







General Terms and Conditions



Subject to the General Terms and Conditions of Schlüter-Systems Ltd.

All previous price lists lose their validity on the publication of this price list. Errors, changes, and printing mistakes as well as changes necessary in the interest of product innovation or shipping reserved. For reasons of printing, colours shown in this price list may differ from actual product colours.

You find the actual "General Terms and Conditions" of Schlüter-Systems Ltd. here:

www.schluter.co.uk/downloads.aspx

Legend

Properties



Low assembly height



Plug-and-play



Available as a set



LED can be shortened



IP X5 (protection against water jets)



IP X7 (protection against temporary submersion)



Light control via Bluetooth/via app



Light control via radio



Lighting control via remote control



Lighting control via smartphone

Application areas



Suitable for use on the wall in the shower area



Suitable for use on walls in interior spaces



Suitable for use on the ceiling



Suitable for use in inner corners of rooms



Suitable for use on an external room corner



Suitable for use on the floor of privately used spaces



Suitable for use on staircase steps



For use in pool landscapes, but not under water (increased resistance against chlorine)



Suitable for use in steam saunas ($\leq 65\text{ }^{\circ}\text{C}$)



Suitable for use on walls in exterior spaces

Packaging units

P = box packaging
KV = case packaging
PL = euro pallet
Unit = units

Dimensions

H = height
L = length
B = width
T = depth



www.liprotec.com



www.schluter-systems.com/app/



Information. Find out more!

Did we pique your interest in the illuminated profile technology of Schlüter-Systems? Then you might like to learn more. The fastest way is to visit our website. For more information, visit **www.liprotec.co.uk**



Please refer to the Technical Manual or the operating instructions accompanying the product for detailed technical information on the installation of Schlüter-LIPROTEC.

Additionally, you can find the current warranty conditions of our Schlüter-LIPROTEC system on the Internet at www.liprotec.co.uk.

Subject to the Standard Terms and Conditions of Sale of Schlüter-Systems Ltd.

All previous price lists lose their validity on the publication of this price list.

Errors, changes, and printing mistakes as well as changes necessary in the interest of product innovation or shipping reserved. For reasons of printing, colours shown in this price list may differ from actual product colours.



P R O F I L E O F I N N O V A T I O N

Schlüter-Systems KG · Schmölestraße 7 · D-58640 Iserlohn

Tel.: +49 2371 971-261 · Fax: +49 2371 971-112 · info@schlueter.de · www.schluter-systems.com

Schlüter-Systems Ltd · Units 3-5 Bardon 22 Industrial Estate · Beveridge Lane · Coalville · Leicestershire · LE67 1TE

Tel.: +44 1530 813396 · Fax: +44 1530 813376 · sales@schluter.co.uk · www.schluter.co.uk