

Astralux 2000

venetian blind systems



CI/SfB	(76.7)	X
--------	--------	---

DESCRIPTION

Astralux venetian blind systems comprise a steel head and bottom rail with aluminium stove enamelled slats or a steel headrail with wooden slats and a wooden bottom rail. The slats can be tilted to accurately attenuate the amount of light entering the space. Blinds can be manually operated or motorised.

The Astralux 2000 venetian blind system is available in an extensive range of slat widths, colours and finishes:

Aluminium slats:

- 16, 25, 35 and 50mm wide solid slats
- 25mm wide perforated slats
- Smooth paint or textured finishes

Wood slats:

- 25 and 50mm solid timber slats
- Solid paint and stain finishes

CONTROL OPTIONS

- Gearbox operation with fixed or removable (to prevent unauthorised use) handle
- Special motorised operating system for gallery applications
- Motorised 240V systems with hard wired or radio controlled operation or links to virtually any control system

PRODUCT OPTIONS

- Cord and wand - a cord to raise or lower a blind and a wand to tilt the slats. Child safety devices available
- Mono-command option where one continuous chain both raises/lowers the blind and tilts the slats. Child safety devices available
- Mono-command wand option where the slats are both tilted and raised/lowered by a polycarbonate wand. Inherently child safe.
- Motorised - low voltage and 240v systems for tilt only or full operation. Inherently child safe.
- Knob tilt for partition blinds
- Range of controls for double glazed installations



N10 SPECIFICATION

Slats to be solid 16mm, 25mm, 35mm, 50mm* wide in colour+ Perforated in 25mm, wide in colour+ Timber in 25mm, 50mm* wide in colour+ Operation to be polyester lift cord for raise and lower and polycarbonate wand to tilt / mono control chain / mono control wand / motorised / partition knob* Rails, slats and cords to be fully colour co-ordinated.



Supplied and installed by an approved Astralux distributor.

*Delete as applicable + Insert as applicable

NBSPlus

SYSTEM 2000

Popular Options



Stack Height for Aluminium Blinds (mm)


BLIND DROP	16mm	25mm	50mm
1000	80	70	95
1500	100	85	107
2000	120	100	130
2300	132	109	142
3000		130	155

Maximum Dimensions (mm)


SLAT	WIDTH	DROP	M²
15mm	2700	2300	6
25mm*	3300	3000	6
35mm	4000	3600	9
50mm	4000	4000	12.5

*if fitted with 35 x 40mm headrail maximum width 3900mm

16mm & 25mm



50mm




Astralux 2000

venetian blind systems




SYSTEM 2000

Exploded View

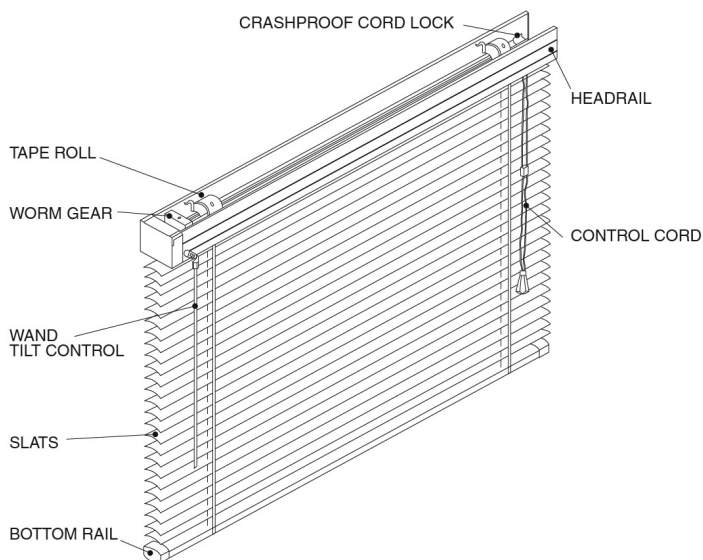


Top Fixing

Free Hanging

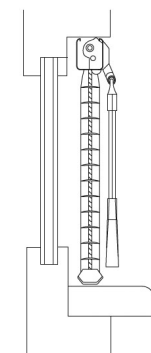


Top Fixing

Recess Hanging



Optional


Face Fixing

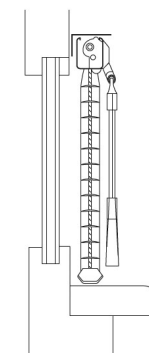

Optional Extras


Side Guide Wires

Available for use on pivoting windows or angled rooflights



Hold down brackets

Available to secure the bottom rail in place




Double Glazing

Specially adapted operating systems are available for blinds used inside double-glazed windows or partitions. Control is by cable or knob or torsion rod.

n55Plus



Astralux products are available from:



Dearnleys

Dearnleys Limited
120-128 Wrenthorpe Road · Wrenthorpe
Wakefield · West Yorkshire WF2 0JN · England
T: 01924 371 791 F: 01924 386 001
E: info@dearnleys.com