
EuroMat



- Market leading man-handleable temporary access and ground protection mat
 - >> 100% recycled High Density Polyethylene
- Connection options for different ground conditions and equipment
- >> Fast and easy to install
- >> Supports loads up to 80 tonnes*
- >> Unique Chevron Traction® surface
- >> Reversible low profile surface (optional)
- >> Low transportation and handling costs
- >> Optional non-slip reflective markings
- >> Use over soft or sensitive ground



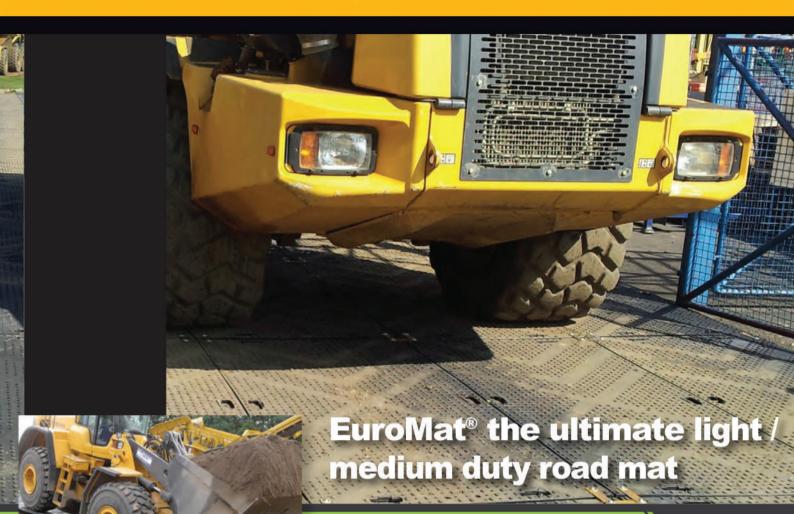

GroundGuards®



Applications

- Construction, civil engineering and ground work
- >>> Temporary access and roadways
- >> Pedestrian walkways
- >> Emergency access routes
- >> Utilities and infrastructure maintenance
- Colf course and sports field maintenance
- >> Sports and leisure events

Technical Specifications

Material: 100% recycled HDPE

Dimensions:

Length: 2410mm 7'11"

Width: 1200mm 3'11"

Depth: 12mm 0.5"

Weight: 35kg 77lbs

Surface Area: 2.9m² 31.2ft²

Transportation: 650 x EuroMat per EU standard

curtain sided 13.6m trailer

*Compression tested at National Physical Laboratory, UK

25.5

Features

Connector Options

Urethane 2 or 4 way connectors are inserted from below and attached via M10 bolts. Metal Fast -Fit connectors can be inserted from above for speed of installation

Eco-friendly

EuroMat significantly reduces damage to ecosensitive areas, avoiding the need for reinstatement once the project is complete.

Light-weight

Weighing just 35kg (77lbs) EuroMat is ideal for both short and long term projects. Incorporating strategically positioned handholds, EuroMat is easy to off load and deploy by a two man team.

Chevron Traction® Surface

EuroMat's chevron traction surface comprises of a broken pattern of rugged nubs which substantially improves the grip and forward motion of heavy equipment or vehicles and reduces side way slippage, even in the most challenging weather or ground conditions. Optional hi-vis markings and cats eyes can be incorporated into EuroMat for additional safety at night.