


THE COMPLETE PRICE GUIDE

FLEXEL

UNDERFLOOR HEATING SYSTEMS

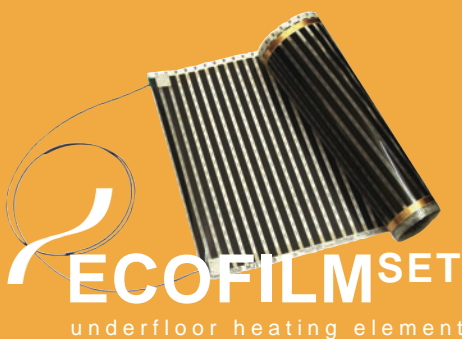

APPROVED
to comply
with the
18th Edition
Wiring
Regulations



www.flexel.co.uk

Table of Contents

UNDERFLOOR HEATING

ECOFLOOR Mat for Tile & Stone Floors	4-5
ECOFLEX Cable Kit for Tile & Stone Floors	6-7
ECOFLEX Loose Cable for Tile & Stone Floors	8-9
ECOFLEX In-Screed Cable	10-11
ECOFILM SET Heating Element for Wood & Laminate Floors	12-13
ECOFILM PRO Heating Kit for Wood & Laminate Floors	14-15
ECOFILM Under Laminate Aluminium Foil Mat	16-17
ECOMAX-DUO Dual Board Overlay System	18-19

CONTROLS

FLEXEL-TOUCH - Touch Screen Thermostat	20-21
TH232 - Programmable Room Thermostat	22
TH131 - Analogue Room Thermostat	23
V22 - Wireless 7-Day Programmable Room Thermostat	24-25
V24 - Central Wireless Control System	26-27
SMART THERMOSTAT - Internet Connected	28

THERMAL INSULATION

ECOMAX-LITE Thermal Insulation	29
ECOMAX Cement Coated Insulation Board	30
ECOMAX Uncoated Insulation Board	31

ICE PREVENTION CABLES

ECOFLOOR - Ice Prevention & Snow Melting Cable Mat	32-33
PIPE FREEZE PROTECTION CABLE	34-35
SELF REGULATING CABLES for pipe freeze protection	36-37

MIRROR DEMISTER PADS	38-39
-----------------------------	-------

RADIANT HEATING

ECOSUN C Radiant Ceiling Cassettes	40-41
ECOSUN S+ High Output Radiant Panels	42-43
ECOSUN TH High Output Zero - Glare Heater	44-45
DESIGNER GLASS RADIATORS	46-47

FLOOR CONSTRUCTION DETAILS	48-51
-----------------------------------	-------

TRAINING COURSES	52
-------------------------	----

NOTES	53-55
--------------	-------

Why choose Flexel?

Flexel International Ltd have been designing and manufacturing innovative electric radiant heating systems to world markets for the past 40 years. These radiant heating products span applications such as underfloor heating, ceiling heating and radiant heaters. As part of the Fenix Group of companies, with production facilities in both the UK and throughout Europe, we are one of the world's largest Electric Underfloor Heating equipment manufacturers.



FLEXEL, Glenrothes, Fife, UK

All Flexel electrical heating elements and cable systems are approved to relevant international standards - EN 60335-2-96 for ECOFILM element and IEC 60800 for ECOFLOOR cable mats and all loose cable products. In the UK the standard products described in this catalogue are available ex-stock via our stockist distributors or to order through the national builders/plumbers merchants and electrical wholesalers networks. We pride ourselves in the high level of technical support and customer service we provide and are recognised as an authoritative brand leader in the field of electric radiant heating for domestic and commercial applications.

Complete Heating Solution

- Complete Solution - Single source supply. Flexel provide the complete range of accessories to accompany your heating product including thermostats, thermal insulation and fixing accessories.
- Laminate, Timber, Carpet & Vinyl Floors - ECOFILM^{SET} is the ultra thin, dry installation system that is simple to install.
- Tile & Stone Floors - A versatile product range includes easy to lay ECOFLOOR Cable Mats or ECOFLEX Loose Cable for irregular shaped rooms.
- In-Screed & Ice Prevention - ECOFLEX In-Screed Cable is the economical solution for new screed floors. ECOFLEX Ice Prevention cables ensure ice free ramps and driveways.



EXCELLENT DISTRIBUTOR SUPPORT

We support our distributors - Flexel do not sell to tilers, plumbers or end customers, direct or on-line.



OVERNIGHT DELIVERY

Fast and Efficient Delivery - Usually the next working day.



TRAINED PROFESSIONALS

Dedicated Sales & Technical Team - Highly trained professionals on hand to assist you.



FREE DESIGN SERVICE

Use our on-line installation planner at www.flexel.co.uk or simply fax or email your plans and our expert technical team will prepare a detailed quote for you.



FULLY TESTED PRODUCTS

Safety First - All Flexel products are approved to comply with the 18th Edition of the IET Electrical Requirements.

WWW.FLEXEL.CO.UK

Find detailed information, installation tips, POS, merchandise, information, literature & technical downloads.

APPROVED
to comply
with the
18th Edition
Wiring
Regulations

The quick and simple to install
solution for all tile and stone floors

ECOFLOOR

underfloor heating mat

ECOFLOOR Underfloor Heating Mats are a combination of a heating cable attached to a fibreglass mesh scrim that makes installation easy. The mat can simply be rolled out onto the floor saving precious time. The mats have double sided tape on the underside so they can easily be fixed to any clean surface.



Features


- Approved to EN60335-2-96 as required by the 18th Edition Wiring Regulations
- Two heat outputs: 150W/m² and 200W/m²
- Quick installation: simply roll out the mat & fix to floor
- Continuous metallic earth screen to ensure electrical safety
- Suitable for tile, stone, slate and marble floor finishes
- Low build height: minimal floor height build up
- Suitable for use in wet areas
- EMC safe

Technical Detail

- Max Power Loading: 150W/m² or 200W/m²
- Diameter 3.0mm – 4.0mm
- 230V supply
- Twin conductor heating cable with single 3m “cold tail” connection lead

Floor Construction

- **Suspended Floors** - To prevent floor movement all wooden floorboards must be covered with Cement Coated Insulation Board or 18mm Plywood.
- **Concrete Floors** - It is recommended to fit a layer of Cement Coated Insulation Board to minimise heat loss & ensure quicker heat-up times.



1. Tile/Stone Floor
2. Tile Adhesive/
Self-levelling compound
3. Cable Mat
4. Cement Coated
Insulation Board
5. Concrete / Timber Floor

Product Codes

150W/m² Cable Mat

Area to be heated (m ²)	Mat References	Output (W)	Width (m)	Length (m)	Price ex VAT (£)
0.5m ²	LDTS150-0.5	75	0.5	1.0	56.03
1.0m ²	LDTS150-1.0	150	0.5	2.0	58.81
1.5m ²	LDTS150-1.5	225	0.5	3.0	70.86
2.0m ²	LDTS150-2.0	300	0.5	4.0	83.43
2.5m ²	LDTS150-2.5	375	0.5	5.0	97.44
3.0m ²	LDTS150-3.0	450	0.5	6.0	106.09
3.5m ²	LDTS150-3.5	525	0.5	7.0	124.63
4.0m ²	LDTS150-4.0	600	0.5	8.0	142.24
4.5m ²	LDTS150-4.5	675	0.5	9.0	154.50
5.0m ²	LDTS150-5.0	750	0.5	10.0	166.86
6.0m ²	LDTS150-6.0	900	0.5	12.0	194.67
7.0m ²	LDTS150-7.0	1050	0.5	14.0	196.73
8.0m ²	LDTS150-8.0	1200	0.5	16.0	229.69
9.0m ²	LDTS150-9.0	1350	0.5	18.0	287.89
10.0m ²	LDTS150-10.0	1500	0.5	20.0	307.04
11.0m ²	LDTS150-11.0	1650	0.5	22.0	363.28
12.0m ²	LDTS150-12.0	1800	0.5	24.0	390.47
14.0m ²	LDTS150-14.0	2100	0.5	28.0	430.54
16.0m ²	LDTS150-16.0	2400	0.5	32.0	471.23

200W/m² Cable Mat

Area to be heated (m ²)	Mat References	Output (W)	Width (m)	Length (m)	Price ex VAT (£)
1.0m ²	LDTS200-1.0	200	0.5	2.0	61.51
1.5m ²	LDTS200-1.5	300	0.5	3.0	82.26
2.0m ²	LDTS200-2.0	400	0.5	4.0	103.00
2.5m ²	LDTS200-2.5	500	0.5	5.0	122.10
3.0m ²	LDTS200-3.0	600	0.5	6.0	141.19
3.5m ²	LDTS200-3.5	700	0.5	7.0	157.33
4.0m ²	LDTS200-4.0	800	0.5	8.0	173.47
4.5m ²	LDTS200-4.5	900	0.5	9.0	193.58
5.0m ²	LDTS200-5.0	1000	0.5	10.0	213.68
6.0m ²	LDTS200-6.0	1200	0.5	12.0	231.21
7.0m ²	LDTS200-7.0	1400	0.5	14.0	261.62
8.0m ²	LDTS200-8.0	1600	0.5	16.0	287.35
9.0m ²	LDTS200-9.0	1800	0.5	18.0	314.83
10.0m ²	LDTS200-10.0	2000	0.5	20.0	402.71

Accessories

Product Code	Description	Price ex VAT (£)
TB06	6mm Cement Coated Insulation Board (600mm x 1200mm)	16.89
TB10	10mm Cement Coated Insulation Board (600mm x 1200mm)	16.89
TBSW	(25mm) Fixing Screws & (35mm) Washers (pack of 50)	17.10
ET16W	White Touch Screen Thermostat (16A)	87.55
ET16S	Silver Touch Screen Thermostat (16A)	90.64
ET16B	Black Touch Screen Thermostat (16A)	90.64
TH232	Digital programmable Thermostat (15A)	70.04
TH131	Manual Room Thermostat (15A)	51.50

APPROVED
to comply
with the
18th Edition
Wiring
Regulations

Complete electric underfloor heating
kits for tile and stone floors

ECOFLEX

underfloor heating cable kit

ECOFLEX Underfloor Heating Cable Kits provide an underfloor heating solution in your kitchen, bathroom or conservatory. Choosing the correct cable kit for the floor is made simple with an easy to use product table. Simply choose the correct product that matches the heated floor area.

ECOFLEX cables are ideal for smaller installations or in rooms with an irregular layout. The cables can be fitted on top of existing wooden or concrete floors that are sound and suitably prepared.

The flexibility of the loose cabling system makes it possible to heat the maximum floor area including hard to reach areas.

Each kit includes:

Heating cable,
adhesive tape,
floor primer, roller,
thermostat conduit,
instructions & guarantee




Features

- Ultra-thin cable
- ECOFLEX can be installed under many floor coverings including ceramic tiles, natural stone and slate
- Twin conductor ultra flexible cable simplifies installation with only a single "cold tail" connection
- Two extremely tough, durable insulation layers which minimises the risk of damage during the installation process and ensures prolonged cable life



Floor Construction

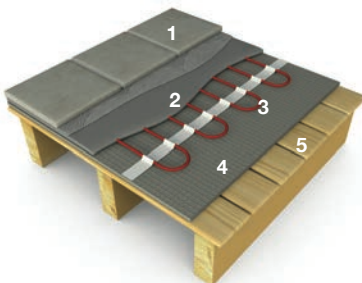

1. Tile/Stone Floor
2. Tile Adhesive
3. Cable
4. Cement Coated Insulation Board/ 18mm WBP Plywood
5. Concrete / Timber Floor

Technical Detail

- Approximate Installed Loading: 150W/m²
- Diameter: less than 3mm
- 230V supply
- Twin conductor cable
- 1 x 3m cold tail connection lead

Product Codes

Area to be heated (m ²)	Product Code	Wattage (W)	Price ex VAT (£)
1.2 - 1.9	CK1	225	78.77
2.0 - 2.9	CK2	350	98.84
3.0 - 3.9	CK3	525	111.19
4.0 - 4.9	CK4	700	145.70
5.0 - 6.4	CK5	875	164.78
6.5 - 7.4	2 x CK3	1050	222.38
7.5 - 8.9	CK3 + CK4	1225	256.89
9.0 - 9.9	2 x CK4	1400	291.41
10.0 - 10.9	CK4 + CK5	1575	310.48
11.0 - 11.9	2 x CK5	1750	329.56
12.0 - 13.4	2 x CK3 + CK5	1925	387.18
13.5 - 14.4	3 x CK4	2100	437.11
14.5 - 15.9	2 x CK4 + CK5	2275	456.19
16.0 - 17.4	CK4 + 2 x CK5	2450	475.26
17.5 - 18.9	3 x CK5	2625	494.34
19.0 - 20.4	2 x CK3 + 2 x CK5	2800	551.94
20.5 - 21.9	CK2 + 3 x CK5	2975	593.18
22.0 - 23.4	2 x CK4 + 2 x CK5	3150	620.97
23.5 - 24.9	CK4 + 3 x CK5	3325	640.04

Accessories

Product Code	Description	Price ex VAT (£)
TB06	6mm Cement Coated Insulation Board (600mm x 1200mm)	16.89
TB10	10mm Cement Coated Insulation Board (600mm x 1200mm)	16.89
TBSW	(25mm) Fixing Screws & (35mm) Washers (pack of 50)	17.10
ET16W	White Touch Screen Thermostat (16A)	87.55
ET16S	Silver Touch Screen Thermostat (16A)	90.64
ET16B	Black Touch Screen Thermostat (16A)	90.64
TH232	Digital Programmable Thermostat (15A)	70.04
TH131	Manual Room Thermostat (15A)	51.50

APPROVED
to comply
with the
18th Edition
Wiring
Regulations

The versatile electric underfloor
heating solution for tile & stone floors

ECOFLEX

underfloor heating cable

ECOFLEX underfloor heating cables are available as a loose cable only option for professional installer use.

ECOFLEX underfloor heating cables provide an underfloor heating solution in your kitchen, bathroom or conservatory. The large range of cables & the flexibility of the loose cabling system makes it possible to heat the maximum floor area including hard to reach areas. Each cable is packaged on a convenient cardboard cable drum and heat sealed for protection.

Minimum packaging provides an economical and environmentally friendly solution for the professional installer. Thermostats and fixing/installation accessories are available as optional extras.




Features

- Approved to IEC 60800
- Small diameter cable
- ECOFLEX can be installed under many floor coverings including ceramic tiles, natural stone and slate
- Twin conductor ultra flexible cable simplifies installation with only a single "cold tail" connection
- Two extremely tough, durable insulation layers which minimise the risk of damage during the installation process and ensures prolonged cable life



Floor Construction

- Suspended Floors - To prevent floor movement all wooden floorboards must be covered with Cement Coated Insulation Board or 18mm Plywood.
- Concrete Floors - It is recommended to fit a layer of Cement Coated Insulation Board to minimise heat loss & ensure quicker heat-up times.



1. Tile/Stone Floor
2. Tile Adhesive
3. Ecoflex Cable
4. Cement Coated Insulation Boards
5. Concrete / Timber Floor

Technical Detail

- Maximum power loading - 10W/lin metre
- Diameter - 3.3 - 4.3mm
- 230V supply
- Twin conductor cable
- 1 x 3m cold tail connection lead

Product Codes

Heated Floor Area to be Covered (m²)			Cable Reference	Output (W)	Length (m)	Price ex VAT (£)
coverage at 160W/m²	coverage at 130W/m²	coverage at 100W/m²				
c-c 7.0cm	c-c 9.0cm	c-c 11.0cm				
0.4m²	0.5m²	0.6m²	10065	65	6.6	30.49
0.7m²	1.0m²	1.2m²	10120	120	11.4	32.15
1.4m²	1.7m²	2.1m²	10200	200	18.9	40.38
1.7m²	2.2m²	2.6m²	10250	250	23.6	47.52
2.3m²	2.9m²	3.5m²	10320	320	31.6	58.61
2.6m²	3.4m²	4.1m²	10400	400	36.9	61.99
3.3m²	4.2m²	5.1m²	10450	450	45.7	74.76
3.4m²	4.3m²	5.2m²	10520	520	49.6	76.76
4.5m²	5.8m²	7.1m²	10600	600	63.9	103.36
5.4m²	6.9m²	8.4m²	10750	750	75.8	108.13
6.1m²	7.9m²	9.6m²	10950	950	87.00	132.13
8.1m²	10.4m²	12.6m²	101100	1100	114.5	155.81
9.2m²	11.9m²	14.5m²	101300	1300	131.3	195.03
11.2m²	14.3m²	17.5m²	101700	1700	158.8	255.33
13.7m²	17.6m²	21.4m²	102000	2000	194.5	355.31

Accessories

Product Code	Description	Price ex VAT (£)
TB06	6mm Cement Coated Insulation Board (600mm x 1200mm)	16.89
TB10	10mm Cement Coated Insulation Board (600mm x 1200mm)	16.89
TBSW	(25mm) Fixing Screws & (35mm) Washers (pack of 50)	17.10
ET16W	White Touch Screen Thermostat (16A)	87.55
ET16S	Silver Touch Screen Thermostat (16A)	90.64
ET16B	Black Touch Screen Thermostat (16A)	90.64
TH232	Digital Programmable Thermostat (15A)	70.04
TH131	Manual Room Thermostat (15A)	51.50
ADT15	Heavy Duty Fixing Tape (15mm x 50m)	4.64

APPROVED
to comply
with the
18th Edition
Wiring
Regulations

An economical solution
for new build projects

ECOFLEX

In-screed underfloor heating cable

ECOFLEX In-Screed Underfloor Heating is a single core cable rated at 15W/lin metre. Used to provide underfloor heating in new build projects in screeded floors. Typically laid directly onto foil backed insulation then covered with a minimum of 50mm sand & cement screed. On new build projects with screed floors this cable can provide an economical heating solution.



Features


- 15W/lin metre provides heating to new builds
- Tough and durable thick heating cable
- Suitable for all floor finishes in wet and dry areas
- Full metallic earth screen for total safety

Technical Detail

- Diameter: 4.6 - 5.1mm
- 230V supply
- Single core conductor cable
- Power loading: 15W/lin metre
- 2 x 5.0m cold connection leads
- Approved to IEC 60800



Floor Construction

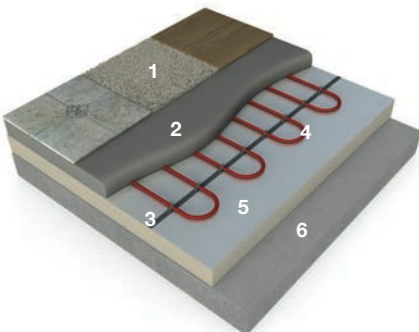

1. Vinyl/carpet floor covering
2. Screed (min 50mm)
3. ECOFLEX HD fixing band
4. ECOFLEX In-screed cable
5. Foil faced floor slab insulation
6. Concrete subfloor

Product Codes

Coverage at 100W/m ²	Coverage at 160W/m ²	Coverage at 200W/m ²	Cable Ref	Output (W)	Length (m)	Resistance (ohms)	Price ex VAT (£)
2.0m ²	1.3m ²	1.0m ²	15200	200	13.7	264.5	42.65
3.3m ²	2.0m ²	1.6m ²	15340	340	22.0	155.5	51.00
4.2m ²	2.6m ²	2.1m ²	15420	420	28.0	126.0	58.20
5.5m ²	3.5m ²	2.8m ²	15550	550	37.0	96.0	68.10
6.7m ²	4.2m ²	3.4m ²	15660	660	45.0	80.0	73.72
7.8m ²	4.9m ²	3.9m ²	15800	800	52.0	66.0	81.95
9.0m ²	5.5m ²	4.4m ²	15880	880	59.0	60.0	89.38
9.6m ²	6.0m ²	4.8m ²	15960	960	64.0	55.0	95.16
10.8m ²	6.7m ²	5.4m ²	151070	1070	72.0	49.5	104.38
12.0m ²	7.6m ²	6.1m ²	151210	1210	81.0	43.5	108.43
12.6m ²	7.9m ²	6.3m ²	151300	1300	84.0	40.5	113.90
15.7m ²	9.8m ²	7.9m ²	151580	1580	105.0	33.5	140.76
19.3m ²	12.0m ²	9.7m ²	151900	1900	129.0	27.8	166.10
22.5m ²	14.0m ²	11.3m ²	152200	2200	150.0	24.0	185.22
28.3m ²	17.7m ²	14.2m ²	152800	2800	189.0	18.9	245.34
34.2m ²	21.4m ²	17.1m ²	153400	3400	228.0	15.5	315.36

Accessories



ADT15 Fixing Tape



ECO-FIX Clip



ECO-FIX P.F.



ECO-FIX H.D.

Product Code	Description	Price ex VAT (£)
ADT15	Heavy Duty Fixing Tape (15mm x 50m)	4.64
ECOPF	500mm Plastic Fixing Strip	0.62
ECOHD	10m Steel Fixing Strip	13.70
ECOCLIP	Plastic Fixing Clips (Pack of 50)	4.94
ET16W	White Touch Screen Thermostat (16A)	87.55
ET16S	Silver Touch Screen Thermostat (16A)	90.64
ET16B	Black Touch Screen Thermostat (16A)	90.64
TH232	Digital Programmable Thermostat (15A)	70.04
TH131	Manual Room Thermostat (15A)	51.50



The ultra-thin solution
for laminate & timber floors

ECOFILM^{SET}

underfloor heating element

Features

- Dry installation: no self levelling compound required
- Suitable for most laminate and engineered hardwood floors
- Extremely low build height: less than 7mm
- Quick installation: roll out the elements & connect pre-wired elements
- Two heat outputs: 130W/m² and 160W/m² for conservatory use
- Suitable for carpet & vinyl floors when used with ECOMAX-DUO



Technical Detail

- Construction: Carbon based flexible heating element
- Operating Voltage: 230V, 50Hz
- Output Rating: 130W/m² or 160W/m²
- Available In 3 Widths: 300mm, 500mm & 1000mm for max coverage
- Element Length: 2.0m to 10.0m in 0.5m increments
- Cold Tail Lengths: 5m

Product Codes

300mm wide ECOFILM^{SET} element

Length (m)	Element Reference	Output (W)	Price ex VAT (£)
2.00	ES13-320	70	30.45
2.50	ES13-325	88	33.54
3.00	ES13-330	105	36.63
3.50	ES13-335	123	39.72
4.00	ES13-340	140	42.81
4.50	ES13-345	158	45.90
5.00	ES13-350	176	48.99
5.50	ES13-355	193	52.08
6.00	ES13-360	211	55.17
6.50	ES13-365	228	58.26
7.00	ES13-370	246	61.35
7.50	ES13-375	263	64.44
8.00	ES13-380	281	67.53
8.50	ES13-385	298	70.62
9.00	ES13-390	316	73.71
9.50	ES13-395	333	76.80
10.00	ES13-3100	351	79.89

Note: To order 160W/m² element for conservatory use substitute ES13 with ES16 in your order code. Element rated at 160W/m² is a NO extra cost option.

500mm wide ECOFILM^{SET} element

Length (m)	Element Reference	Output (W)	Price ex VAT (£)
2.00	ES13-520	122	38.69
2.50	ES13-525	153	43.84
3.00	ES13-530	183	48.99
3.50	ES13-535	214	54.14
4.00	ES13-540	244	59.29
4.50	ES13-545	275	64.44
5.00	ES13-550	306	69.59
5.50	ES13-555	336	74.74
6.00	ES13-560	367	79.89
6.50	ES13-565	397	85.04
7.00	ES13-570	428	90.19
7.50	ES13-575	458	95.34
8.00	ES13-580	489	100.49
8.50	ES13-585	519	105.64
9.00	ES13-590	550	110.79
9.50	ES13-595	580	115.94
10.00	ES13-5100	611	121.09

1000mm wide ECOFILM^{SET} element

Length (m)	Element Reference	Output (W)	Price ex VAT (£)
2.00	ES13-1020	252	63.41
2.50	ES13-1025	315	73.71
3.00	ES13-1030	378	84.01
3.50	ES13-1035	441	94.31
4.00	ES13-1040	504	104.61
4.50	ES13-1045	567	114.91
5.00	ES13-1050	631	125.21
5.50	ES13-1055	694	135.51
6.00	ES13-1060	757	145.81
6.50	ES13-1065	820	156.11
7.00	ES13-1070	883	166.41
7.50	ES13-1075	946	176.71
8.00	ES13-1080	1009	187.01
8.50	ES13-1085	1072	197.31
9.00	ES13-1090	1135	207.61
9.50	ES13-1095	1198	217.91
10.00	ES13-10100	1261	228.21

Accessories

Product Code	Description	Price ex VAT (£)
EL06	ECOMAX-LITE Thermal Insulation (800mmx1250mm)	5.67
ADT50	Heavy Duty Adhesive Tape (50mm x 50m)	6.59
PVB12	Polyester Vapour Barrier (1m x 12m)*	28.84
PVB25	Polyester Vapour Barrier (1m x 25m)**	48.41
ET16W	White Touch Screen Thermostat (16A)	87.55
ET16S	Silver Touch Screen Thermostat (16A)	90.64
ET16B	Black Touch Screen Thermostat (16A)	90.64
TH232	Digital Programmable Thermostat (15A)	70.04
TH131	Manual Analogue Thermostat (15A)	51.50

*1m x 12m of PVB has floor coverage of 10m² **1m x 25m of PVB has floor coverage of 22m²

APPROVED
to comply
with the
18th Edition
Wiring
Regulations

The professional kit
for laminate & timber floors

ECOFILM^{PRO}

professional underfloor heating kit

ECOFILM^{PRO} Professional Heating Kits are available in 5m², 10m², 15m² and 20m² kits and include all the tools for the professional installer. Simply cut the roll of 500mm wide ECOFILM into lengths and make the connections using the supplied crimping tool. The standard heat output of ECOFILM is 130W/m² ECOFILM^{PRO} is NOT designed for use in wet areas e.g. bathrooms/shower rooms.



Kit Contents

- Roll of 500mm Wide Film
- Heating Element Connection Crimps
- Cold Tail Connection Leads (Brown & Blue)
- Mastic Insulation Tape
- Green Polyester Tape Discs
- Ratchet Crimping Tool
- Full Installation Instructions
- 10 Year Guarantee Certificate

Features


- Approved to EN60335-2-96 as required by the 18th Edition Wiring Regulations
- Standard heat output: 130W/m²
- Extremely low build height: less than 7mm
- Available as: 5m², 10m², 15m² and 20m² kits for maximum floor coverage
- Quick installation: simply cut the roll to length and connect
- Suitable for most laminate and engineered hardwood flooring
- When used in conjunction with ECOMAX-DUO, ECOFILM^{PRO} is suitable for carpet and vinyl floors

Technical Detail

- Construction: Carbon based flexible heating film
- Operating Voltage: 230V, 50Hz
- Heat Output: 130W/m²
- Element Width: 500mm

ECOFILM^{PRO} KITS MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN

Floor Construction

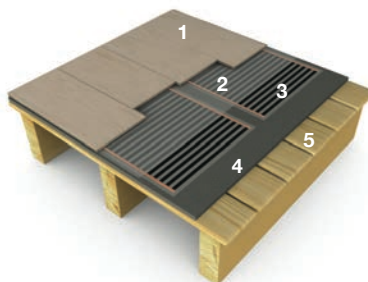

1. Laminate/Timber Floor
2. Polyester Vapour Barrier
3. ECOFILM Elements
4. Ecomax-Lite Insulation
5. Wood/Concrete Sub Floor

Product Codes

Product Code	Description	Price ex VAT (£)
EPRO - 5	5m ² kit	163.67
EPRO - 10	10m ² kit	266.67
EPRO - 15	15m ² kit	369.67
EPRO - 20	20m ² kit	472.67

Required Accessories

Product Code	Description	Price ex VAT (£)
EL06	ECOMAX-LITE Thermal Insulation (800mm x 1250mm x 6mm)	5.67
ADT50	Heavy Duty Adhesive Tape (50mm x 50m)	6.59
PVB12	Polyester Vapour Barrier (1m x 12m)*	28.84
PVB25	Polyester Vapour Barrier (1m x 25m)**	48.41
ET16W	White Touch Screen Thermostat (16A)	87.55
TH232	Digital Programmable Thermostat (15A)	70.04
TH131	Manual Analogue Thermostat (15A)	51.50

* 1m x 12m of PVB covers 10m² of floor area

** 1m x 25m of PVB covers 22m² of floor area

Additional Accessories

The accessories included in a standard Ecofilm^{Pro} kit are sufficient to install the kit in a single regularly shaped room. If installing a larger sized kit in multiple smaller rooms, additional accessories may be required.

Product Code	Description	Price ex VAT (£)
CRIMP10	10 x Connection Crimps	6.18
CTBL10	1.5mm ² x 10m Cold Tail Leads (Blue)	6.70
CTBR10	1.5mm ² x 10m Cold Tail Leads (Brown)	6.70
MASTIC1	1000mm x 101mm Mastic Tape	20.60
GTD20	20 x Green Termination Discs	1.24



ECOFOIL

under laminate aluminium foil mats

ECOFOIL Aluminium Foil Heating Mats are designed for use under laminates which are installed in wet environments like bathrooms and shower rooms. ECOFOIL mats are a combination of heating cable encased in an aluminium foil.

The aluminium layer above the heating cable acts as a heat dispersion medium and earthing grid making the product suitable for use in wet areas like bathroom or shower rooms where ECOFILM carbon elements should not be used.

Features


- Quick Installation - simply roll out the mat and fix to floor
- Suitable for use under floating laminate and engineered hardwood floors
- Fully earthed aluminium foil suitable for use in wet areas
- Dry installation - no self levelling compound required
- Low build height - only 7mm when used in conjunction with ECOMAX-LITE insulation

Technical Detail

- Advanced fluoropolymer heating cables encased in an aluminium foil
- Operating Voltage: (230V, 50Hz)
- Heat Output: (140W/m²)
- Mat Width: 500mm
- Cold Lead Length: 3m



Floor Construction

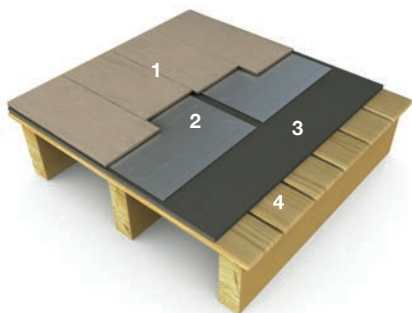

1. Laminate/Timber Floor
2. ECOFOIL Mat
3. ECOMAX-LITE Thermal Insulation
4. Wood/Concrete Sub Floor

Ecofoil Aluminium Foil Mats

140W/m², 230V, 500mm wide

Product Code	Area (m ²)	Output (W)	Length (m)	Price ex VAT (£)
EF140-1.0	1.0	140	2.0	57.80
EF140-1.5	1.5	210	3.0	79.64
EF140-2.0	2.0	280	4.0	93.40
EF140-3.0	3.0	420	6.0	127.99
EF140-4.0	4.0	560	8.0	162.56
EF140-5.0	5.0	700	10.0	190.88
EF140-6.0	6.0	840	12.0	219.19
EF140-7.0	7.0	980	14.0	237.81
EF140-8.0	8.0	1120	16.0	256.42
EF140-9.0	9.0	1260	18.0	294.64
EF140-10.0	10.0	1400	20.0	332.87
EF140-12.0	12.0	1680	24.0	417.15
EF140-14.0	14.0	1960	28.0	507.79

Additional Accessories

Product Code	Description	Price ex VAT (£)
EL06	ECOMAX-LITE Thermal Insulation (800mmx1250mm)	5.67
ADT50	Heavy Duty Adhesive Tape (50mm x 50m)	6.59
ET16W	White Touch Screen Thermostat (16A)	87.55
TH232	Digital Programmable Thermostat (15A)	70.04
TH131	Manual Analogue Thermostat (15A)	51.50

The complete electric underfloor heating
solution for under carpet & vinyl floors

ECOMAX-DUO

d u a l b o a r d o v e r l a y s y s t e m

ECOMAX-DUO is a dual board overlay system suitable for use over ECOFILM underfloor heating. It is a dry lay system that creates a free floating subfloor that is extremely stable and is instantly ready to receive the finished floor covering.

ECOMAX-DUO provides a smooth stable laying surface onto which most finished floor coverings can be fixed. This enables ECOFILM elements to be used as the underfloor heat source for a variety of floor coverings such as carpet, linoleum and luxury vinyl.

Installation of ECOMAX-DUO is quick, clean and simple. The system consists of a baseboard and a top board, each with a layer of contact adhesive.

The combination of ECOFILM and ECOMAX-DUO provides a labour saving, cost effective method for heating linoleum, vinyl and carpet.




Features

- Allows ECOFILM to be installed under carpet and vinyl
- Creates a stable sub-floor for laying a variety of floor coverings
- Simple installation
- Low build height – only 7mm
- Dry Lay. Consists of a base board (3mm) and top board (4mm) with pre-applied contact adhesive to bond them together.

Technical Detail

- Dimensions - 600mm x 1200mm
- Pack contents - 4 base boards & 4 top boards (2.88m²)
- Material - MDF coated with contact adhesive
- Density - 770 kg/m³
- Thermal Resistance - 0.07m²°K/W

Floor Construction

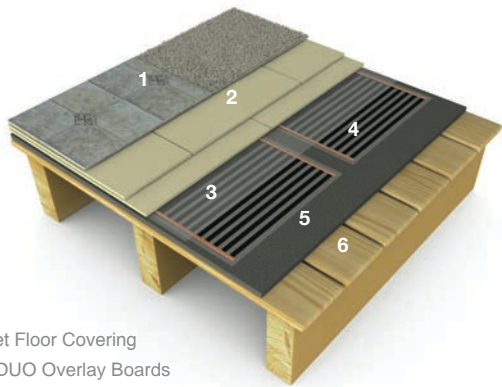

- 1. Vinyl/Carpet Floor Covering
- 2. ECOMAX-DUO Overlay Boards
- 3. Polyester Vapour Barrier
- 4. ECOFILM Element
- 5. ECOMAX-LITE Thermal Insulation
- 6. Suspended timber or concrete subfloor

Product Codes

Product Code	Description	Price ex VAT (£)
EDUO 7	4 base boards (3mm) & 4 top boards (4mm) Total coverage 2.88m ²	59.33

For ECOFILM^{SET}
information
see page 12 - 13



Simplicity in Control **FLEXELTOUCH** FLOOR SENSING THERMOSTAT

- The new Flexel-Touch is designed to be the simplest to use electric floor heating control available.
- The Flexel-Touch comes packed with innovative features to optimise your comfort and minimise running costs with the simplest touch screen interface.
- A large full colour backlit touch screen provides simple programming by guiding you through program setup and adjustment - no need for any complicated instruction manual.



Features and Benefits

• **Easy To Use**

Touch screen interface makes adjustment easy

• **Intuitive Programming**

Simple to use graphical display with user configured screen colours




• **Easy Installation**

Choice of 4 factory preset program schedules to get your heating working quickly.

- **Energy Monitor**

Shows how much energy is being used and when



- **Energy Efficient**

Optimise comfort and save energy with multiple time and temperature settings

- **Attractive Styling**

Choice of thermostat finishes and display options.



Specification

- Electrical Protection: Class II
- Floor Limit Sensor Type: NTC, 3M cable
- Maximum Load: 16 Amps, 230V AC, 3680W
- Dimensions H/W/D: 90 x 90 x 19mm
- External Sensor Compatibility: 10K, 12K or 15K @25°C
- Installation Depth: 22mm
- Warranty: 3 years
- Approvals: EN 60730-1:2003

Product Codes

Product Code	Description	Price ex VAT (£)
ET16W	White Touch Screen Thermostat (16A)	87.55
ET16B	Black Touch Screen Thermostat (16A)	90.64
ET16S	Silver Touch Screen Thermostat (16A)	90.64
RAS	Optional Remote Auxiliary Sensor	16.48

SPARE PART ONLY- Each thermostat is supplied with a 3m Floor Probe.

ET16PR	Replacement Floor Probe	15.45
--------	-------------------------	-------

CONTROLS

TH232 Programmable Room Thermostat

The TH232 is a premium quality programmable thermostat that is ultra compact and provides precise control of your heating system.



- **Compact Design**

One of the smallest, most attractive designs on the market. Programme buttons are hidden behind facia doors to provide an attractive flush finish

- **Intuitive Programming**

Simple to set-up and program. Large easy to read LCD screen with intuitive programming icons

- **3 Modes Of Operation**

Choice of 3 different operational modes -
Air, Floor, or Air & Floor Limit Sensor. 3450W @230V, 15A

- **Polar White Finish**

Classic colouring will suit all rooms

- **Floor Sensor Cable**

The TH232 is supplied with a 3m floor sensor cable

Product Codes

Product Code	Description	Price ex VAT (£)
TH232	Digital Programmable Thermostat (15A)	70.04

SPARE PART ONLY - Each thermostat comes with a floor probe

TH232PR	Replacement Floor Probe	15.45
---------	-------------------------	-------

TH131 Analogue Room Thermostat

The TH131 is an electronic thermostat developed for optimal regulation of under floor heating systems.



- **Easy To Use**

A simple to use thermostat; temperature control is via a simple analogue dial.

- **3 Modes Of Operation**

Choice of 3 different operational modes -
Air, Floor, or Air & Floor Limit Sensor. 3450W @230V, 15A

- **Polar White Finish**

Classic colouring will suit all rooms

- **Floor Sensor Cable**

The TH131 is supplied with a 3m floor sensor cable

Product Codes

Product Code	Description	Price ex VAT (£)
TH131	Manual Room Thermostat (15A)	51.50

SPARE PART ONLY - Each thermostat comes with a floor probe

TH131 PR	Replacement Floor Probe	15.45
----------	-------------------------	-------



Wireless 7 Day Programmable Room Thermostat




The V22 Wireless Programmable Thermostat is designed to provide wireless time and temperature control to heating systems in domestic and light commercial buildings. It is ideal for use in renovation projects where it is impractical to run wires from the room thermostat to the heating appliance being controlled. Ideal for control of all type of electric heating systems; underfloor, radiant panels, convector heaters or ceiling heating etc.

Advantages

- Wire free installation from thermostat location to heating appliance reduces wiring costs and decoration disruption
- Easy setup - Choice of 9 factory preset programs to reduce set up time
- Capable of controlling up to 4 receiver/switching units

Features

- 7 day programming with digital accuracy. Up to 6 time / temperature settings per day
- Manual override with timer function
- Heat symbol display shows on call for heat
- Auto, manual, holiday and off (frost) modes
- Display battery powered using 2 x 1.5V AAA batteries (supplied)
- V22 Thermostat can control up to four V23 switching units (1 x master and 3 x slaves)
- V23 receiver/switching unit rated to 16 Amp at 230V
- V23 receiver/switching unit has a floor probe connection facility for use with underfloor heating

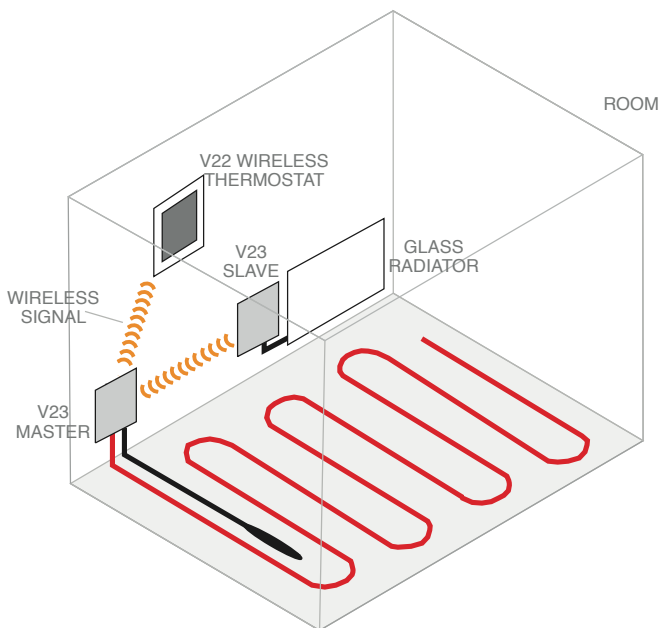

Technical Detail

- Placement: wall or stand
- Frequency: 868Mhz
- Range: 30 metres
- Power Supply: 2 x AAA 1.5V (inc) – approx life 2 years
- Thermostat Dimensions: 83x75x24mm WxHxD
- Receiver Dimensions: 89x89x24mm WxHxD
- IP Rating: 30

Product Codes

Product Code	Description	Price ex VAT (£)
V22	Wireless programmable room thermostat	66.95
V23	Wireless receiver/switching unit (16A)	66.95

FLEXEL

Central Wireless Control System



Central Wireless Control System

The Flexel “Central Control System” is a multizone central heating control system. It consists of a centrally located colour touch screen panel that communicates wirelessly with thermostats and sensors throughout your home. It is a modular system that is fully scalable up to 24 heating zones. It allows convenient control of your whole home, enabling you to maximise comfort and heating efficiency from a central location. Ideal for control of all type of electric heating systems; underfloor, radiant panels, convector heaters or ceiling heating etc.

Advantages

- Wire free installation between control system components reduces wiring costs and decoration disruption
- Simple installation and setup
- Modular system – fully scalable for future expansion (up to 24 zones).

Features

- Colour touch screen panel for simple use
- Convenient central control
- Wirelessly controls your whole house heating system.

Product Codes

Product Code	Description	Price ex VAT (£)
V22	Wireless Room Thermostat	66.95
V23	Wireless Receiver/Switching Unit (16A)	66.95
V24	Central Touch Panel Control Unit	140.08
V24WiFi	WiFi Enabled Central Touch Panel Control Unit	272.95

Additional Accessories




V22 wireless room thermostat which allows temperature adjustment in individual rooms.



V23 wireless wall mounted receiver/switching unit. Connected to the 230V mains, this unit switches the connected heating on/off. It has a floor probe facility for use with floor heating.



V24 WiFi Central Control Unit allows control of your heating system from your smartphone, using the intuitive iOS or Android App.

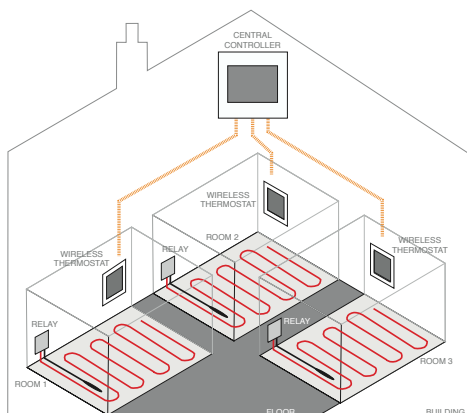

FLEXEL

Internet Connected Thermostat



The Neo Kit-e is an Internet Connected Thermostat. The Neo Kit includes a neoStat-e and neohub allowing you to take control of your electric floor heating from anywhere.

Upgrading your existing system is as simple as swapping your existing thermostat and plugging the Hub into your router. Control of your floor heating system is then possible from your iOS or Android smartphone.

The Neo Kit is scalable, allowing other Neostats to be added to the Hub to create a fully controllable network system of your home heating.

Features

- Attractive design incorporating soft touch keys
- 4 comfort levels a day
- Arctic white finish
- Automatic blue backlight
- Choice of three operational modes: Air, Floor or Air & Floor
- Each Neostat comes with a 3m floor sensor cable
- Rated at 16A, 3600W, 230V
- Requires a DHCP compatible broadband router
- App requires iOS8+ or Android 4+
- Fully scalable up to 32 zones

Product Codes

Product Code	Description	Price ex VAT (£)
Neo Stat kit	Starter Kit. Neo Hub and Room Thermostat	350.16
Neostat E	Additional 16A Room Neostat E, White	127.02



The ideal product to prevent downward
heat loss under wood and laminate floors


ECOMAX-LITE

t h e r m a l i n s u l a t i o n

FOR USE WITH ECOFILM

ECOMAX-LITE Thermal Insulation is an extruded polystyrene insulation material for use below wood or laminate floors in conjunction with ECOFILM underfloor heating elements. ECOMAX-LITE is available in 6mm thick sheets and is manufactured from recycled material free from ozone depleting chemicals.

Produced from a closed cell construction foamed polystyrene it has excellent thermal insulation properties. It MUST be used below ALL ECOFILM heating systems. Each board covers 1m², simply order the number of boards you require for your chosen floor area adding approximately 10% for cutting wastage. Where threshold height limitations permit in conservatories we recommend installing a double layer of ECOMAX-LITE insulation.

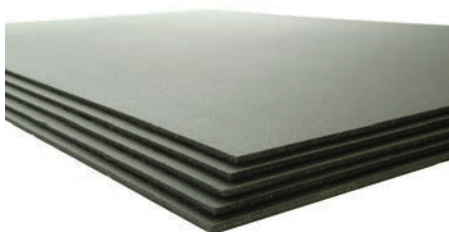

Features

- 6mm thick
- Excellent moisture resistance
- Excellent sound insulation
- Levels small floor imperfections
- Suitable for most floor constructions
- Easy to work with – cut with knife
- Lightweight and easy to handle


Technical Detail

- Dimensions: 800mm x 1250mm x 6mm (1m² coverage per sheet)
- Material: Close cell foamed polystyrene
- Density: 40Kg/m³
- Thermal conductivity: 0.035W/m²K

Floor Construction

ECOMAX-LITE reduces downward heat losses to the sub-floor ensuring more of the heat is transferred through the finished floor surface.

1. Laminate/Timber Floor
2. Polyester Vapour Barrier
3. ECOFILM^{SET} Elements
4. ECOMAX-LITE Thermal Insulation
5. Wood/Concrete Sub Floor



Product Codes

Product Code	Description	Price ex VAT (£)
EL06	ECOMAX-LITE Thermal Insulation (800mmx1250mmx6mm)	5.67




The ideal product to prevent downward heat loss under tile and stone floors

ECOMAX

Cement Coated Insulation Board

FOR USE BELOW ECOFLOOR OR ECOFLEX CABLE SYSTEMS

ECOMAX is a robust Cement Coated Insulation Board developed specifically for the thermal insulation of tiled floors. It is constructed from an extruded polystyrene core covered on both sides by a glass fibre mesh reinforced polymer cement coating. ECOMAX has exceptional compressive strength and moisture resistance.

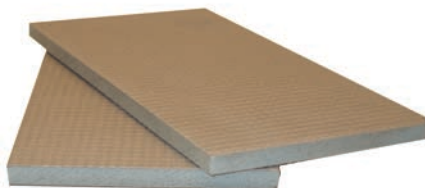

Features

- Available in 6mm or 10mm thickness
- Waterproof
- Can be fixed to any surface
- Keyed surface ready to receive tile adhesive
- Easy to work with - Cut with a knife or saw
- Lightweight and easy to handle


Technical Detail

- Dimensions: 600mm x 1200mm (0.72m²)
- Weight (kg/board): 1.8kg (6mm) or 2.0kg (10mm)
- Extruded Polystyrene core with polymer cement coating
- Density: 32Kg/m³
- Thermal Conductivity: 0.033W/m^ok

Floor Construction

Cement Coated Insulation Board reduces downward heat losses to the sub-floor ensuring more of the heat is transferred through the finished floor surface.

1. Tile/Stone Floor
2. Tile Adhesive/
Self-levelling Compound
3. Heating Cable Mat
4. Thermal Insulation
5. Wood/Concrete Sub Floor



Product Codes

Product Code	Description	Price ex VAT (£)
TB06	6mm Cement Coated Insulation Board (600mm x 1200mm)	16.89
TB10	10mm Cement Coated Insulation Board (600mm x 1200mm)	16.89
TBSW	(25mm) Fixing Screws & (35mm) Washers (pack of 50)*	17.10

* Fixing washers should only be used with 10mm backer board. Approx 12 fixings per board



The ideal product to prevent downward
heat loss under tile and stone floors

ECOMAX-XPS

Uncoated Insulation Board

FOR USE BELOW ECOFLOOR CABLE MAT SYSTEMS

ECOMAX-XPS Uncoated Thermal Insulation is an extruded polystyrene insulation material for use over concrete sub floors in conjunction with ECOFLOOR cable mats where a more economical alternative to coated insulation boards are required. It should never be used on timber subfloors.



Available in 6mm or 10mm thickness each board covers 0.72m^2 . When ordering insulation boards, add around 10% to the amount required to make up for any wastage when cutting.

Features

- Available in 6mm or 10mm thickness
- Excellent moisture resistance
- Excellent sound insulation
- Levels small floor imperfections
- Suitable for use with concrete sub floors
- Easy to work with - cut with a knife or saw
- Lightweight and easy to handle


Technical Detail

- Dimensions: 600mm x 1200mm (0.72m^2)
- Weight (kg/board): 0.10kg (6mm) or 0.15kg (10mm)
- Extruded Polystyrene
- Density: 34Kg/m^3
- Thermal Conductivity: $0.03\text{W/m}^2\text{K}$

Floor Construction

The Insulation Board reduces downward heat losses to the sub-floor ensuring more of the heat is transferred through the finished floor surface.

1. Tile/Stone Floor
2. Tile Adhesive/
Self-levelling Compound
3. Ecofloor Cable Mat
4. Thermal Insulation
5. Concrete Sub Floor



Product Codes

Product Code	Description	Price ex VAT (£)
UB06	6mm Uncoated Insulation Board (600mm x 1200mm)	6.59
UB10	10mm Uncoated Insulation Board (600mm x 1200mm)	9.99

APPROVED
to comply
with the
18th Edition
Wiring
Regulations

Clear walkways,
pavements and drives

ECOFLOOR

ice prevention & snow melting cable mat

In the winter months, serious injury can occur from the formation of ice on work platforms in warehouse loading bays or on entrance walkways to busy public buildings etc. This potential hazard can easily be minimised by installing an ice prevention system.

In the case of snow fall, an ice prevention system will quickly melt any snow that falls providing clear access for pedestrians and vehicles on pavements and drives.

MTS heating cable mats are rated at 300 W/m^2 and are used for ice and snow melting of outdoor areas and other applications where the cable is embedded in concrete. The most common application in industry is heating of ramp or loading platforms in factories and warehouses, where an ice prevention system can reduce the risk of accidents and ensure work can be carried out at all times. There are however a variety of applications for ice and snow melting. All these applications can be kept free from ice and snow so heavy salting and snow shovelling are avoided. These include: car parks; garage drive ways; pavements and outdoor steps.



Features

- Approved to IEC 60800
- 300 W/m^2 power density provides clear, safe access for pedestrians and vehicles on pavements and drives.
- 500mm wide mat format with pre-spaced cables ensure even heat distribution and ease of installation
- Suitable under concrete, pavements and asphalt



MTS Mats, 230V, 500mm wide

Product Code	Output (W)	Area (m ²)	Length (m)	Price ex VAT (£)
MTS300/1.5	450	1.5	3.0	78.09
MTS300/2.0	600	2.0	4.0	99.16
MTS300/3.0	900	3.0	6.0	128.91
MTS300/4.0	1200	4.0	8.0	145.02
MTS300/5.0	1500	5.0	10.0	187.57
MTS300/6.0	1800	6.0	12.0	220.83
MTS300/7.0	2100	7.0	14.0	241.94
MTS300/9.0	2700	9.0	18.0	293.36
MTS300/10.0	3000	10.0	20.0	312.16
MTS300/12.0	3600	12.0	24.0	383.64
MTS300/15.0	4500	15.0	30.0	431.36
MTS300/20.0	6000	20.0	40.0	657.98

Technical Detail

- Single conductor cable with full protection screen
- Cold tails: 1x5m with other cold lead 1x5m + length of mat
- 5.0-5.5mm thick cable with UV protective outer jacket
- 230V supply, IP 67 Rated
- Power density - 300W/m²



Accessories

Simply melt away the ice and snow.

An ice detector for the economical control of ice prevention and snow melting cables used on driveways, ramps and exterior steps. The use of an ice detector will reduce energy consumption by approximately 80% compared to control by a simple air thermostat.

The ice detector, equipped with a combined temperature and moisture ground sensor, monitors conditions and determines the optimum switch-on time so that the heating comes on in good time to prevent ice formation. Unnecessary waste of energy is avoided as the system is only activated when there is ice or snow present.

Product Code	Description	Max Load (W)	Price ex VAT (£)
IDC100	Single channel automatic ice detector	3600	226.60
IDC200	Two channel automatic ice detector	11000	339.90
IDCGS	Combined temperature & moisture sensor		283.25

ECOFLEX

pipe freeze protection cable

Ecoflex PFP cable is a simple solution to prevent frozen pipes in domestic and small commercial buildings. Composed of a pre-terminated fixed resistance heating cable fitted with a pipe thermostat this really is a simple, low cost solution.

The integrated thermostat monitors pipe temperature and energises the system when there is a risk of freezing. Once a safe pipe temperature has been reached the cable is de-energised to save energy.

Available in a range of 9 sizes, the product is fitted with a 1.5m cold lead and 3 pin plug for easy connection to the power supply. The product can simply be installed in a straight line along pipes up to 50mm diameter. Additional accessories required for installation are PFP fixing tape to secure the cable to the pipe and Alu50 aluminium heat dispersion tape for installation onto plastic pipework. Once the cable has been installed the entire installation should be covered with a layer of 20mm (max) thick flame retardant insulation.



Features

- Protects hot and cold water pipework that may be subject to freezing conditions
- Simple, low cost solution for the prevention of burst pipes
- Suitable for both metal and plastic pipe up to 50mm diameter
- Ready made unit with fitted 1.5m cold lead and 3 pin plug for simple installation
- Integrated thermostat energises system when temperature falls below +3°C
- Typical uses: boiler condensate pipes, external water pipes, waste pipes in unheated areas, lofts, outbuildings and external waste pipes

Installation



Wrap plastic pipe with aluminium tape



Position pipe thermostat and cable




Tape cable to pipe



Insulate pipe (20mm max)

Required Accessories



Alu50 Tape




PFP Tape

Product Codes

Product Code	Length (m)	Voltage	Watts	Price ex VAT (£)
PFP2	2	230	20	59.41
PFP3	3	230	30	63.09
PFP4	4	230	40	64.22
PFP6	6	230	72	70.36
PFP10	10	230	136	77.61
PFP14	14	230	152	84.02
PFP21	21	230	281	95.66
PFP30	30	230	337	108.15
PFP42	42	230	490	133.77
Alu50	(45m x 50mm)	Aluminium tape		21.13
PFP tape	(33m x 18mm)	Fixing tape		6.70



self regulating cables for pipe freeze protection

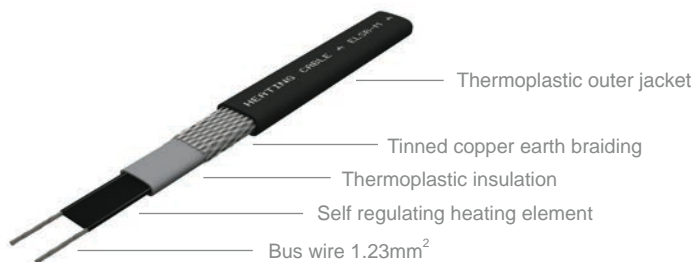

The ELSR Self Regulating 230V heating cables provide an effective and affordable solution for the freeze protection of water pipes. They are suitable for use on metal and plastic pipes. Typical applications would be the protection of boiler condensate pipes, exposed water pipes in the home, farm buildings, stables, garages and lofts plus many other applications.

ELSR cables are supplied by the metre and can be cut to length on site minimising wastage. The ELSR trace heating range will not produce dangerous hot spots even when cables are touching or overlapping and the two power outputs within the range can be used when straight tracing pipes of between 15mm and 150mm in diameter.

Advantages

- Easy termination
- Time saving
- Economical

To provide pipe freeze protection the ELSR cables are simply taped along the bottom of the pipe.

For plastic pipes we recommend the use of aluminium foil tape to provide better heat dispersion. For maximum protection, trace heated pipes should always be insulated. A connection kit using crimps and heat shrink insulation (kit 4) will be required per circuit. This kit includes components to produce a cold tail connection to the trace cable and seal the end.

Technical Detail

- Outer jacket: TPE-O
- Bus wire: nickel plated copper
- Construction: protective braid and a thermoplastic outer jacket
- Nominal Voltage: 230V
- Bend radius: 25mm (min)

Features

- Self regulating
- Two power outputs: 10W/lm and 20W/lm
- Can be cut to length on site
- Moisture proof with full length earth braid


Product Codes

Product Code	Output W/m at 10°C	Max Temp	Min Temp	Max Circuit Length (m)	Price ex VAT (£)
ELSR-M-10-BO	10	65	-30	126	10.90
ELSR-M-20-BO	20	80	-10	146	12.84

Accessories

Product Code	Description	Price ex VAT (£)
Kit 4	Connection and Termination Kit	13.03
Alu50	Aluminium Foil Tape (For plastic pipes) (45m x 50mm)	21.13
PFP tape	Fixing Tape, High Temp (33m x 18mm)	6.70

MIRROR DEMISTER PADS



Mirror Demister Pads are the simple and totally safe answer to steamed-up mirrors in wet areas such as Bathrooms, Shower Rooms and En-Suites.

The self adhesive pads are easy to install behind existing or new mirrors. Simply integrate the mirror pad into the lighting circuit, so it only switches on when you need it. For larger mirrors, multiple pads can be used together.

Features

- Very low energy consumption
- Self adhesive, easy to install
- Can be used in multiples to cover larger areas
- Ultra slim pad fits behind existing or new mirrors
- Integrate into lighting circuit for automatic operation when light is switched on

Technical Detail

- IP44 rated
- Output Rating: 200W/m²
- Operating Voltage: 230V, 50Hz
- Class II Connection
- CE Marked - complies with all relevant standards
- 1m mains connection lead



Product Codes

230 Volts			
Product Code	Description	Heating Load (W)	Price ex. VAT (£)
MHP 007	274mm x 150mm	7	27.48
MHP 012	274mm x 265mm	12	32.58
MHP 025	584mm x 274mm	25	43.40
MHP 036	450mm x 400mm	36	54.18
MHP 050	524mm x 520mm	50	61.96
MHP 048	800mm x 300mm	48	56.82
MHP 080	785mm x 524mm	80	69.06
MHP 100	1040mm x 524mm	100	83.60
MHP 150	1490mm x 524mm	150	125.40

Grounding pads are £2



The ideal product for localised
or hard to heat areas

ECOSUN C

radiant ceiling cassettes



ECOSUN C radiant heating ceiling cassettes provide cost effective, discrete and efficient comfort as either primary or complimentary heating in localised and hard to heat areas.

Designed specifically for easy installation into a suspended ceiling grid, the 300W panel directly replaces one 600mm x 600mm ceiling tile. The 600W panel replaces two 600mm x 600mm ceiling tiles.

Cassettes are also supplied with a mounting bracket for easy installation onto conventional ceilings.

Cassettes are maintenance free, easy to clean with a semi-smooth white finish. For added safety they come complete with a built in thermal cut-out and can easily be controlled using the Flexel range of air sensing thermostats.

Typical applications are offices, shops, trade counters, reception areas and localised spot heating at work benches.



Technical Detail

- 22 gauge galvanised steel radiating surface with white powder coated finish
- Carbon impregnated glass cloth heating element for excellent heat distribution and long life
- Mounting height: 2.4m min - 4.0m max
- Mounting bracket included
- Can be suspended with chains
- Available in 300W and 600W outputs
- Thermal overload protection set at 130°C

Features

- Fully insulated panel to optimise performance and minimise heat losses
- Easy to clean semi smooth white finish
- Fits into standard “T” bar suspended ceiling
- 1.5m heat resisitant cable
- Thermal overload protection

Ceiling Installation

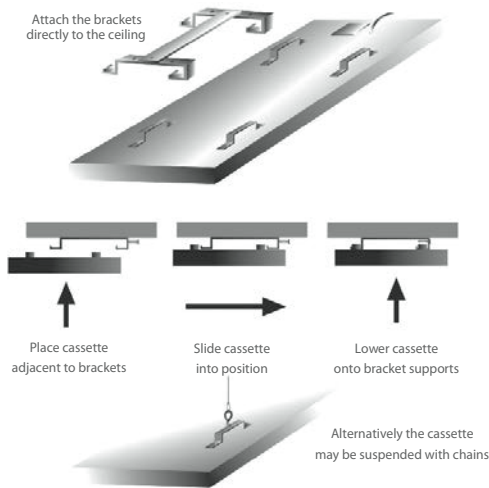

ECOSUN C cassettes in an office ceiling



Close up of the ECOSUN C placed in the ceiling grid



The easy to clean ECOSUN C is ideal for medical applications, like this dental surgery

Product Codes

Product Code	Wattage	Dimensions	Price ex VAT (£)
3C-300	300	595 x 595 x 25mm	125.00
6C-600	600	1195 x 595 x 25mm	165.00

The versatile space heating solution

ECOSUN S+

high output radiant panels

Ecosun Radiant Panels are an ideal way of providing thermal comfort in commercial and industrial buildings. They are specifically designed for high level mounting. They can be horizontally ceiling mounted with an auxilliary frame or suspended on drop rods or chains. They are only 60mm deep and typical applications include large volume spaces where conventional warm air convection system heating systems would be uneconomic. These include; Supermarkets, Gymnasiums, Showrooms, Factories and Warehouses.



Features

Ecosun radiant panels offer many advantages over conventional warm air heating systems. These include:

- Localised Heating- only warm the area required e.g. work stations
- Suspended or ceiling mounted. Ecosun panels provide totally usable floor & wall space and reduce the risk of damage or vandalism.
- Higher ventilation and air extract rates do not significantly effect the radiant performance of Ecosun panels which primarily warm the fabric of the heated area.
- Gentle radiant heat results in improved comfort conditions at lower inside ambient temperature. Providing comfort conditions at lower running costs.
- Radiant heating does not cause air convection currents, therefore minimising dust movement and providing a clean draft free environment.

- Ecosun panels are constructed using a rod heating element encapsulated within a special aluminium extrusion profile. The surface area of the aluminium profile is treated with a silicating process which substantially increases its surface area and its ability to emit heat. The result is a high efficiency, low maintenance heater suitable for commercial and industrial environments.

Technical Information

- Attractive powder coated casing (RAL9010 off white) & grey radiating faceplate.
- Fully insulated galvanised casing with class O foil backed 25mm thick insulation
- Ceiling mounting frame included in installation kit
- Heating panel surface temperature - approx 350°C
- Protection: Class1 , IP x 4, Cable gland to IP44
- Thermo crystal high emissivity heating panel
- Recommended mounting heights: Full heating; 5m - 8m, localised spot heating; 3.5m - 4.5m

Installation

Due to the high power outputs Ecosun Radiant Panels must be installed the following minimum distances from:

- Radiant surfaces (up to 260°C) 1.0m
- From back side of panel 10cm
- Minimum distance from wall 1.5m
- Minimum height from the floor 3.5m



Product Codes

Product Code	Power (W)	Voltage (V)	Weight (Kg)	Dimensions (mm)	Price (£) ex VAT
ECOSUN S+ 09	900	230	8.15	1550x150x60	204.52
ECOSUN S+ 12	1200			1550x150x60	214.73
ECOSUN S+ 18	1800	230/400 2N	12.9	1550x250x60	295.94
ECOSUN S+ 24	2400			1550x250x60	310.73
ECOSUN S+ 30	3000		17.7	1550x350x60	384.25
ECOSUN S+ 36	3600			1550x350x60	403.47

Accessories

Product Code	Description	Price (£) ex VAT
ECOSUN TB	Tiltable brackets for Ecosun S+	7.79
ECOSUN G0912	Protective grill for ECOSUN S+ 09-12	27.44
ECOSUN G1824	Protective grill for ECOSUN S+ 18-24	34.11
ECOSUN G3036	Protective grill for ECOSUN S+ 30-36	40.79

ECOSUN TH

high output zero-glare heater



The ECOSUN TH is a no glare, medium wavelength, infrared heater. Constructed from powder coated black profile, its modern clean and elegant design allows it to be easily fitted in a multitude of domestic or commercial environments where heat is required without the glare.

Ideal for enclosed terraces, conservatories, reception areas, churches, cafes, restaurants, shops, zoos and many more.

Features

- Cost effective and efficient.
- Infrared heat can be directed onto seating areas and does not waste heat in a 360° circle like other heating options.
- Easy installation: electrical installation (230V) with mounting brackets.
- Clean modern design and the option of ceiling or wall mounting help the heater blend seamlessly into the surrounding environment.
- Zero light output is ideal for indoor applications where the light emitted from a conventional shortwave patio heater would be undesirable or intrusive.
- Tilttable brackets - with large field of effect.
- Available in 1000 Watt and 1500 Watt versions.

Technical

- Min. installation height is 1.8m above the floor (lower edge of panel)
- For ceiling installation there must be a min. gap of 30cm between the ceiling and the upper edge of the panel
- 2m heat resistant cable attached
- Protection: Cable gland to IP44



Product Codes

Product Code	Watts (W)	Voltage (V)	Dimensions (mm)	Weight (Kg)	Price (£) ex VAT
TH1000	1000	230	1080x140x45	3.2	188.49
TH1500	1500	230	1580x140x45	4.4	220.77



Accessories

Product Code	Description	Price (£) ex VAT
TH1000GR	Protective grill for the TH1000	48.18
TH1500GR	Protective grill for the TH1500	64.61
TH HINGE	Two-leaf hinge bracket	48.81
TH BRACKET	Three leaf group bracket	57.48

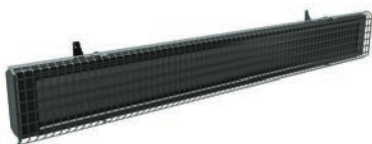

Optional Control Accessories

The combination of the V23 wireless receiver unit and V20 remote control handset provides wireless control of ECOSUN TH. The V20 handset is equipped with an on/off button plus a 2 hour “timer” function - the appliance will turn itself off automatically after 2 hours.




Product Codes

Product Code	Description	Voltage	Price (£) ex VAT
V23	Wireless Receiver Unit	230V	66.95
V20	Remote Control Handset	2xAAA, 1.5V	34.51

ECOSUN GS

frameless glass infrared heating panel



The ECOSUN GS is an elegant glass heating panel, suitable for both wall and ceiling mounting.

The frameless design means the panel is both modern and elegant. It is ideal for both domestic and commercial applications.

The front emitting surface is made of 4mm safety glass (6mm in the mirror effect panel), available in a range of finishes to compliment any interior.

For ceiling mounting, a mounting frame is included to provide additional support.

Features

- Frameless design
- 4mm safety glass, 6mm for mirror effect
- Available in a range of colours and mirror effect

Technical Detail

- Emitting surface 4mm safety glass (6mm in mirror effect)
- Rear: aluminium frame with mounting brackets

Product Codes

Product Code	Colour	Power (W)	Dimensions (mm)	Price (£) ex VAT
GS300	Black; White; Beige; Graphite; Platinum; Wine Red	300	585 x 585 x 39	205.00
GS500	Black; White; Beige; Graphite; Platinum; Wine Red	500	1200 x 400 x 39	270.00
GS600	Black; White; Beige; Graphite; Platinum; Wine Red	600	1185 x 585 x 39	280.00
GS850	Black; White	850	1185 x 785 x 39	420.00
GS300	Mirror	300	585 x 585 x 41	220.00
GS500	Mirror	500	1200 x 400 x 39	325.00
GS600	Mirror	600	1185 x 585 x 41	350.00

Stainless Steel Towel Rail

For GS panels

Designed to fit the GS glass radiators, the towel rails are suitable for vertical wall mounted radiators in bathroom applications. They are available as a single or double towel rail. The rails are made from stainless steel.

Product Codes

Product Code	Description	Price (£) ex VAT
GS-STR300	Single Towel Rail for GS300	70.00
GS-DTR300	Double Towel Rails for GS300	140.00
GS-STR500	Single Towel Rail for GS500	70.00
GS-DTR500	Double Towel Rails for GS500	140.00
GS-STR600	Single Towel Rail for GS600	70.00
GS-DTR600	Double Towel Rails for GS600	140.00



FLOOR CONSTRUCTION

Floor Constructions Details


It is important to choose the correct underfloor heating product dependant on your subfloor material and your chosen floor covering.

The following underfloor heating constructional details will show you the floor build-up for the most popular types of finished floor coverings.

On some occasions you may have a choice of product and floor construction to achieve your choice of heated floor surface. The final product decision may depend on a comparison of factors such as: finished floor build-up height, speed or ease of installation or cost. Whatever product or construction method you choose, you can be sure that it is well proven and will provide an excellent heating system.


Insulation materials are a crucial component in all the construction details shown. Use of the recommended insulation material will enable the floor to heat up faster and run more efficiently.

UFH beneath a Tile & Stone Floor

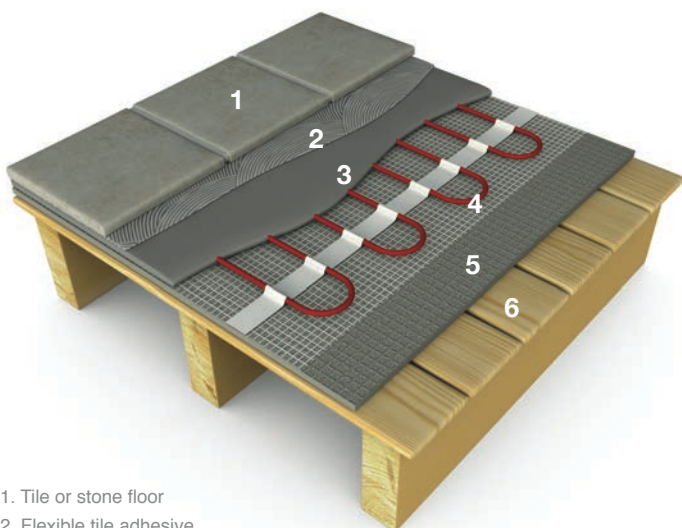


1. Tile or stone floor
2. Flexible tile adhesive
3. Flexible levelling compound
4. ECOFLOOR Cable Mat or ECOFLEX Loose Cable
5. ECOMAX Cement Coated Insulation Board
6. Suspended timber or concrete subfloor

UFH beneath a Linoleum or Luxury Vinyl Floor

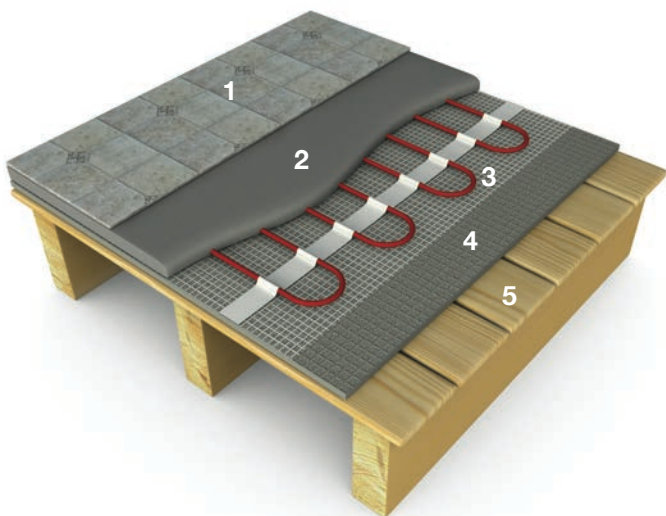


1. Linoleum or luxury vinyl floor covering
2. Flexible levelling compound (12mm min depth)
3. ECOFLOOR Cable Mat or ECOFLEX Loose Cable
4. ECOMAX Cement Coated Insulation Board
5. Suspended timber or concrete subfloor

UFH beneath a Screed Floor

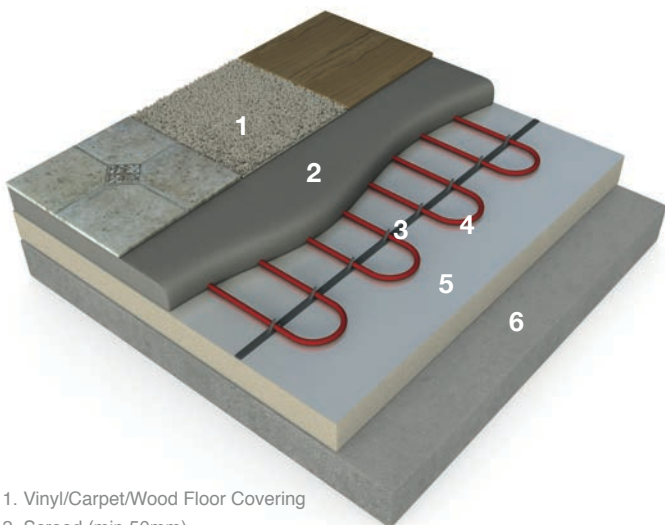


1. Vinyl/Carpet/Wood Floor Covering
2. Screed (min 50mm)
3. ECO-FIX HD Fixing Band
4. ECOFLEX In-screed Cable
5. Foil faced floor slab insulation
6. Concrete Subfloor

UFH beneath Carpet

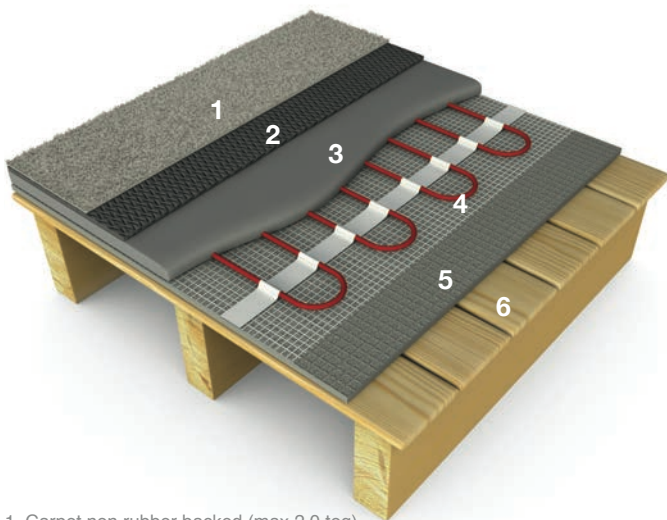


1. Carpet non rubber backed (max 2.0 tog)
2. Low tog underlay if required (max 0.8 tog)
3. Flexible levelling compound (12mm min depth)
4. ECOFLOOR Cable Mat or ECOFLEX Loose Cable
5. ECOMAX Cement Coated Insulation Board
6. Suspended timber or concrete subfloor

UFH beneath a Bonded Engineered Hardwood Floor

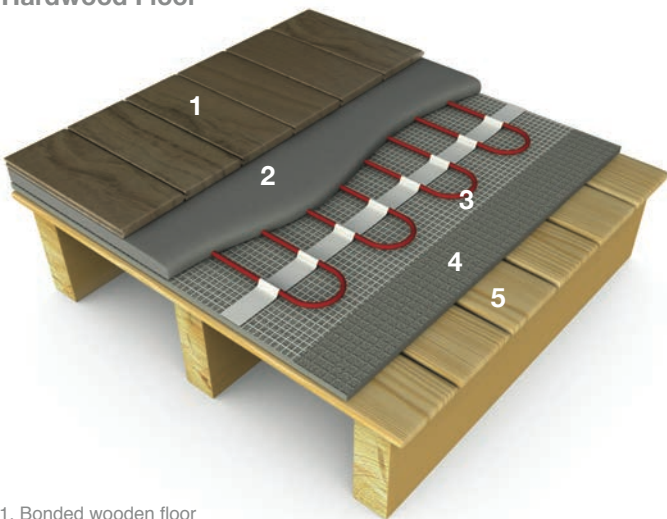


1. Bonded wooden floor
2. Flexible levelling compound (12mm min depth)
3. ECOFLOOR Cable Mat or ECOFLEX Loose Cable
4. ECOMAX Cement Coated Insulation Board
5. Suspended timber or concrete subfloor

UFH beneath Laminate or Engineered Hardwood Floor

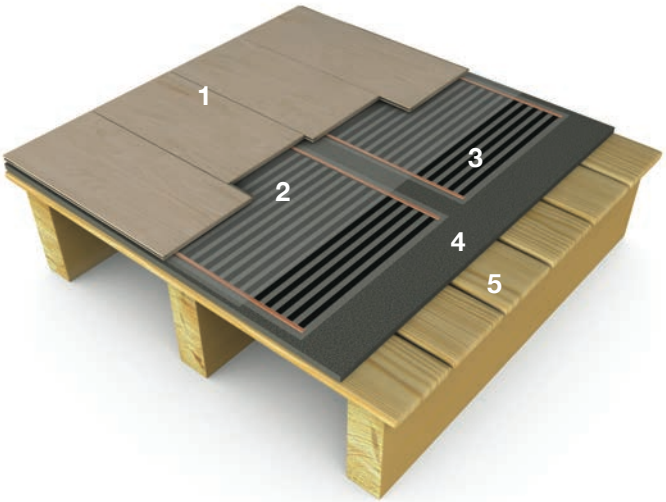

1. Laminate or Engineered Hardwood Floor
2. Polyester Vapour Barrier
3. ECOFILM Element
4. ECOMAX-LITE Thermal Insulation
5. Suspended timber or concrete subfloor

UFH beneath Carpet or Vinyl Floor

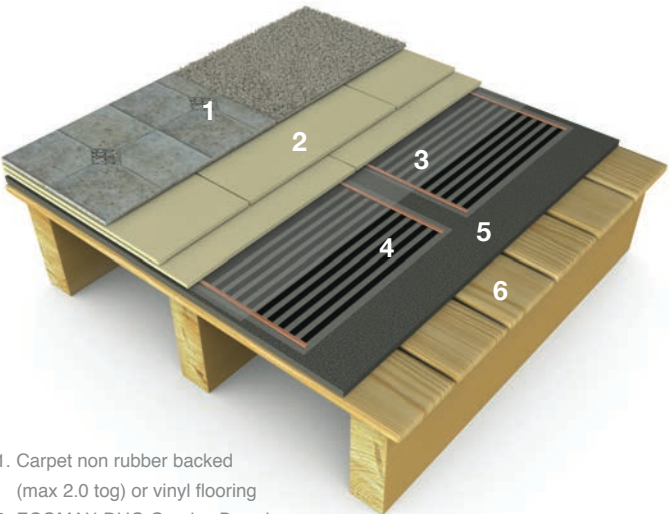

1. Carpet non rubber backed
(max 2.0 tog) or vinyl flooring
2. ECOMAX-DUO Overlay Boards
3. Polyester Vapour Barrier
4. ECOFILM Element
5. ECOMAX-LITE Thermal Insulation
6. Suspended timber or concrete subfloor

TRAINING COURSES

Become a Flexel approved Installer

You can win more customers and grow your business, by adding the stamp of authority that comes from being a Flexel approved electric underfloor heating installer.

Our free training days will teach you everything you need to know about installing our cable mats, loose cable and film heating systems.

Our technical experts will be on hand to answer any questions and pass on tips to use on your next underfloor heating installation.

Simply email enquiries@flexel.co.uk

Features

- Product demonstrations
- Installation practice
- Fitting guidance
- Technical advice
- Complimentary lunch and refreshments
- Installer packs to take away - including completion certificate

Topics

- ECOFLOOR Cable Mats and Loose Cable
- ECOFILM Installation
- In-Screed Cables
- Frost Protection Cables
- Insulation Options
- Thermostats
- Snow Melting Kits



Email enquiries@flexel.co.uk or call 01592 760928 to book a complimentary Flexel training course today.

NOTES

NOTES

NOTES



Authorised Distributor

Flexel Underfloor Heating Systems
is a product range by
Flexel International Ltd,
Telford Road, Glenrothes, Fife, KY7 4NX, UK

Tel: 01592 760928 Fax: 01592 760929

Web: www.flexel.co.uk

Email: enquiries@flexel.co.uk