
Conex | Bänninger Delbraze

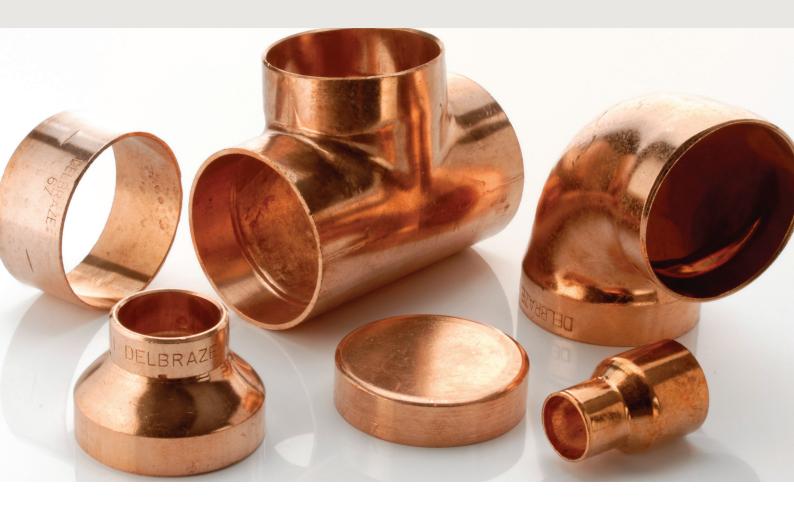

A range of copper capillary brazing fittings

Features and Benefits:

- Available in sizes 66.7-159mm.
- Suitable for connecting copper tubes in accordance with EN1057.
- Manufactured with copper and gunmetal which are immune to dezincification.
- Fittings are designed for brazing applications only and are not suitable to be jointed using the soft soldering technique.
- Our range of accessories includes brazing rods to EN 1044, brazing flux and mats.

• Hydraulic working temperatures and pressures based on EN 1254-1:

Size (mm)	Working pressure (bar)		
	-20°C to 110°C	150°C	200°C
66.7	15.4	13.1	6.9
76.1	15.4	13.1	6.9
108	14.2	12.1	6.4
133	10.6	7.7	4.1
159	11.8	8.6	4.6





Delbraze Range

Straight Coupler



DB601 From: 67mm To: 159mm

Metric to Imperial Straight Coupler



DB601IM From: 76 x 3" To: 108 x 4"



Reduced Coupler

DB601R From: 67 x 22mm To: 159 x 108mm



Size: 67 x 2.1/2"

Male Straight Connector



DB704 From: 67 x 2.1/2" To: 108 x 4"

Fitting Reducer



DB6012 From: 67 x 28mm To: 159 x 133mm

Obtuse Elbow



DB607 From: 67mm To: 108mm





To: 159mm







































OB/L