



STA-LOK[®]
marine rigging hardware



<u>Wire rope</u>	05
<u>Sta-Lok</u> Self-Fit Terminals	07
<u>Insulators</u> & Accessories	19
<u>Swage</u> Terminals	29
<u>Turnbuckles</u> & Fittings	39
<u>Guardrail</u> Fittings	57
<u>Accessories</u>	61

Prices displayed are retail. Discount programs to suit the needs of your business can be arranged. Every effort has been made to ensure that prices and technical information are correct at the time of printing. Prices are subject to alteration throughout the year, and may be changed without notice. Prices are exclusive of VAT.

Returns Policy

Returned goods will not be accepted without prior approval by Sta-Lok Terminals Ltd. All returns must be prepaid and in a re-saleable condition before a credit can be issued. Sta-Lok Terminals Ltd does not assume responsibility for any incidental or consequential damages incurred in connection with the use of its products.

Sta-Lok Terminals Ltd. - The Forge, Mistley Heath, Manningtree, Essex, CO11 2QH, UK

Order & Enquiries


enquiries@stalok.com

+44 (0) 1206 390 773

Heritage

Our heritage is the source of our inspiration. Our commitment to manufacturing and quality has allowed us to share a single vision throughout our history and beyond.

Our company began in 1973 when founder Ivor Barfield introduced a new design of wire rope terminal. His system dramatically simplified the termination of wire rope and quickly became a must-have piece of equipment in the sector. The company is now run by Terry Barfield alongside several long-term employees and family members. We have retained a culture based on our history. Preserving this has allowed us to stand out in the marketplace and helped us secure our position as the market leader in the manufacture of premium quality rigging hardware.

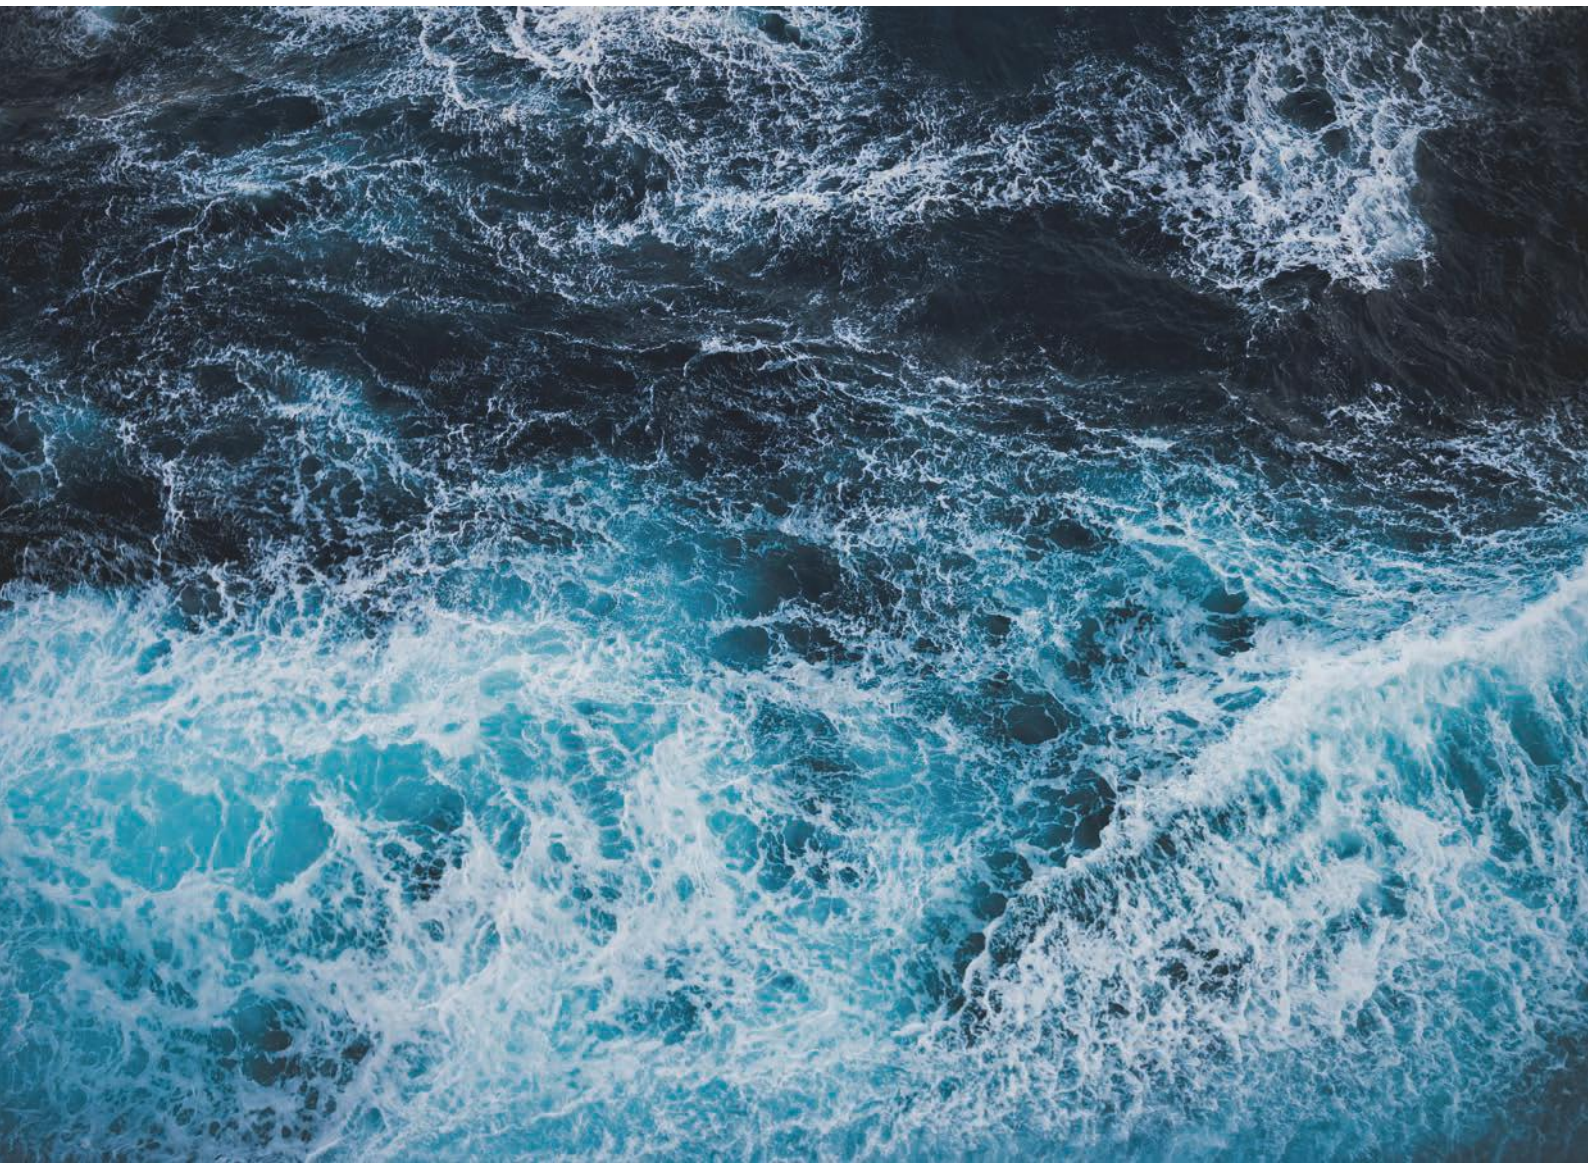

Dedicated

Our dedication to design, manufacturing and customer service means reliability and endurance are at the forefront of everything we do. After all, our products must stand up to the most challenging of climatic conditions and state-of-the-art design is precisely what makes our product world class.

Innovative

Improving, advancing and designing are all part of the process which allows us to introduce the most up-to-date products to the market. This innovation means we constantly evaluate and review the performance of our hardware to ensure that we continue to exceed our customers' expectations.

Excellence

Delivering outstanding customer service is embedded in our company culture. We believe customer service is an extension of the quality products we produce. This is why our experienced product consultants are always on hand to help you choose the best Sta-Lok product to meet your specific requirements.

Safety

Our products are designed solely with safety in mind. All our products are quality-tested and world renowned for their endurance and reliability. We are proud to say we are **ISO 9001** accredited, re-enforcing our passion for quality throughout our entire company and product range.



Certificate Number 1122
ISO 9001, ISO 14001
OHSAS 18001, ISO 27001



Design

Our products are designed with you in mind. We know you are looking for the very best and can reassure you that our innovative designs have quality and safety at the heart. Quality is achieved by using premium materials, selected for their strength and corrosion resistance. As for safety, our products are stronger than the wire rope to which they are fitted.

Precision

We continuously invest in the most advanced machinery which allows us to achieve exceptional manufacturing tolerances and finish specifications. We use this technology not just to our own advantage, but to the advantage of our customers for improved performance and reliability. After all, it allows us to deliver to some of the highest standards in the industry at a fair price.

Quality

We use the best materials to the highest specification, using alloys that are certificated and fully traceable. This allows us to have an entirely transparent inspection process that begins with the receipt of the raw material and continues throughout the manufacturing process. It's all for your peace of mind.



Stainless Steel Wire Ropes

Sta-lok offer a wide range of stainless steel wire rope grade 316 1.4401.

We stock 1x19, 7x7, 7x19 and compacted strand constructions. Supplied on 100, 200 and 300 metre reels.

We offer a range of services

- ▶ Personalised inventory
- ▶ Call off orders
- ▶ Cut lengths
- ▶ Plastic coating

Other constructions are available on request

Compacted strand wire rope is available in different constructions as shown below.



1x7



1x19




1x25




1x31




1x36




1x19




7x7



7x19



1x9
PVC coated



7x7
PVC Coated

Stainless Steel Wire Rope Breaking Loads

1x19

REFERENCE	WIRE (MM)	MIN LOAD KN
W119-1.5	1.5	1.80
W119-2	2	3.24
W119-2.5	2.5	5.10
W119-3	3	7.31
W119-4	4	12.16
W119-5	5	17.75
W119-6	6	25.50
W119-7	7	36.85
W119-8	8	43.35
W119-10	10	66.19
W119-12	12	88.75
W119-14	14	119.64
W119-16	16	141.22
W119-19	19	220.65
W119-22	22	285.08
W119-25	25	398.00

7x7

REFERENCE	WIRE (MM)	MIN LOAD KN
W77-2	2	2.37
W77-2.5	2.5	3.71
W77-3	3	5.34
W77-4	4	9.49
W77-5	5	14.81
W77-6	6	21.38
W77-7	7	29.13
W77-8	8	37.95
W77-10	10	59.33
W77-12	12	85.42

PVC COVERED 1x19

REFERENCE	WIRE (MM)	MIN LOAD KN
WPC1-4/6	4/6	12.55
WPC1-5/7	5/7	19.61
WPC1-5/9	5/9	19.61

COMPAK

REFERENCE	WIRE (MM)	CONSTRUCTION	MIN LOAD KN
WC-3	3	1x7	9.80
WC-4	4	1x7	17.50
WC-5	5	1x19	23.93
WC-6	6	1x19	34.81
WC-7	7	1x19	48.15
WC-8	8	1x19	60.31
WC-10	10	1x19	95.81
WC-12	12	1x19	141.22
WC-14	14	1x36	189.14
WC25-14	14	1X25	187.72
WC-16	16	1X36	250.88
WC25-16	16	1X25	251.65
WC-19	19	1x36	303.00
WC25-19	19	1X25	314.56

7x19

REFERENCE	WIRE (MM)	MIN LOAD KN
W719-2	2	2.21
W719-2.5	2.5	3.40
W719-3	3	5.00
W719-4	4	8.89
W719-5	5	13.92
W719-6	6	20.00
W719-7	7	27.26
W719-8	8	35.60
W719-10	10	55.60
W719-12	12	80.02
W719-14	14	108.86
W719-16	16	133.37

WHITE PVC COVERED 7x7

REFERENCE	WIRE (MM)	MIN LOAD KN
WPC7-4/6	4/6	9.49

Sta-Lok Self-Fit Terminals

Hand-fitted instead of machine swaged, the Sta-Lok terminal can be installed using very simple hand tools. Can be used for right hand and left hand lay 1x19, 7x19 7x7 and compacted strand stainless steel wire rope from 3mm - 26mm.

The Sta-Lok terminal will work under constant loading and variable shock loading. The termination is stronger than the rated breaking load of the wire rope. In all situations the Sta-Lok terminal has proven to be totally reliable and re-usable*.

*just a new wedge is required


- Assemble on site, easy to install with simple hand tools.
- No pre-measurement required.
- A different wedge is required for 1x19, 7 strand and compacted strand wire rope.
- All our wedges are laser marked for easy identification and selection.



Sta-Lok Eye



- ▶ Sta-Lok Self Fit Terminal, the reusable alternative to swage
- ▶ Only basic hand tools required
- ▶ No pre-measurement needed
- ▶ Quick and easy to install
- ▶ Guaranteed stronger than wire rope
- ▶ For right hand and left hand lay wire rope
- ▶ Packed for 1x19 wire as standard
- ▶ Manufactured from high specification 316 stainless steel
- ▶ Different wedges are available to terminate 7 strand & compacted strand wire ropes

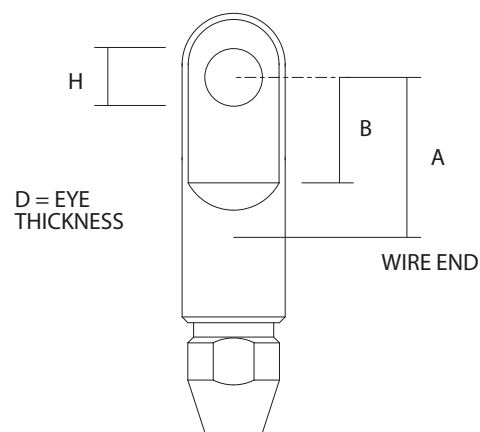

		WIRE SIZE		A		B		D		H		WEIGHT		PRICE
REFERENCE		MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	KG	LB	£
033-03		3 MM & 1/8"		17.9	0.705	10.0	0.393	5.0	0.196	6.5	1/4	0.020	0.044	18.50
033-04		4 MM & 5/32"		20.3	0.800	14.7	0.580	5.8	0.230	8.0	5/16	0.040	0.088	20.60
033-05	-	5	-	24.4	0.960	18.0	0.710	7.5	0.295	10.0	3/8	0.080	0.176	23.70
-	133-05	-	3/16	24.4	0.960	18.0	0.710	7.5	0.295	10.0	3/8	0.080	0.176	23.70
-	133-55-3/8	-	7/32	32.4	1.276	23.7	0.933	9.5	0.375	10.0	3/8	0.140	0.309	30.90
-	133-55-7/16	-	7/32	31.7	1.248	23.0	0.904	9.5	0.375	11.5	7/16	0.140	0.309	30.90
033-06	-	6	-	31.0	1.219	22.2	0.875	9.5	0.375	13.0	1/2	0.140	0.309	30.90
-	133-06-3/8	-	1/4	32.4	1.276	23.7	0.933	9.5	0.375	10.0	3/8	0.140	0.309	30.90
-	133-06-7/16	-	1/4	31.7	1.248	23.0	0.904	9.5	0.375	11.5	7/16	0.140	0.309	30.90
-	133-06	-	1/4	31.0	1.219	22.2	0.875	9.5	0.375	13.0	1/2	0.140	0.309	30.90
033-07		7 MM & 9/32"		32.5	1.281	24.6	0.969	10.5	0.413	13.0	1/2	0.160	0.353	35.00
033-08-1/2		8 MM & 5/16"		35.7	1.406	27.0	1.062	12.0	0.472	13.0	1/2	0.240	0.529	42.70
033-08-5/8		8 MM & 5/16"		35.7	1.406	27.0	1.062	13.5	0.531	16.0	5/8	0.280	0.617	56.70
033-10	-	10	-	41.1	1.619	29.2	1.150	13.5	0.531	16.0	5/8	0.340	0.750	64.40
033-10-3/4	-	10	-	41.1	1.619	29.2	1.150	13.5	0.531	19.5	3/4	0.400	0.882	64.40
-	133-10	-	3/8	41.1	1.619	29.2	1.150	13.5	0.531	16.0	5/8	0.340	0.750	64.40
-	133-10-3/4	-	3/8	41.1	1.619	29.2	1.150	13.5	0.531	19.5	3/4	0.400	0.882	64.40
-	133-11	-	7/16	42.8	1.687	33.3	1.312	19.0	0.748	19.5	3/4	0.680	1.499	148.30
033-12	-	12	-	42.8	1.687	33.3	1.312	19.0	0.748	19.5	3/4	0.680	1.499	148.30
-	133-12	-	1/2	42.8	1.687	33.3	1.312	19.0	0.748	19.5	3/4	0.680	1.499	148.30
-	133-12-7/8	-	1/2	42.8	1.687	33.3	1.312	19.0	0.748	22.5	7/8	0.700	1.543	223.50
033-14		14 MM & 9/16"		55.6	2.187	38.1	1.500	20.0	0.788	22.5	7/8	1.100	2.425	186.40
033-14-1		14 MM & 9/16"		55.6	2.187	38.1	1.500	20.0	0.788	25.4	1	1.220	2.690	207.00
033-16		16 MM & 5/8"		59.0	2.326	40.0	1.576	20.0	0.788	22.5	7/8	1.420	3.131	223.50
033-16-1		16 MM & 5/8"		60.0	2.364	40.0	1.576	20.0	0.788	25.4	1	1.700	3.748	244.10
033-19		19 MM & 3/4"		68.3	2.687	49.2	1.937	27.0	1.062	28.6	1 1/8	2.820	6.217	458.40
033-22		22 MM & 7/8"		82.6	3.250	60.3	2.375	33.3	1.312	35.0	1 3/8	3.960	8.730	546.40
033-26		26 MM & 1"		86.0	3.375	60.3	2.375	33.3	1.312	35.0	1 3/8	5.300	11.684	718.90

Metric Only


Inch Only

+44 (0) 1206 390 773 | enquiries@stalok.com

Sta-Lok Stud



- ▶ Sta-Lok Self Fit Terminal, the reusable alternative to swage
- ▶ Only basic hand tools required
- ▶ Quick and easy to install
- ▶ No pre-measurement needed
- ▶ Guaranteed stronger than wire rope
- ▶ For right hand and left hand lay wire rope
- ▶ Manufactured from high specification 316 stainless steel
- ▶ Supplied with split pin
- ▶ Right hand thread only

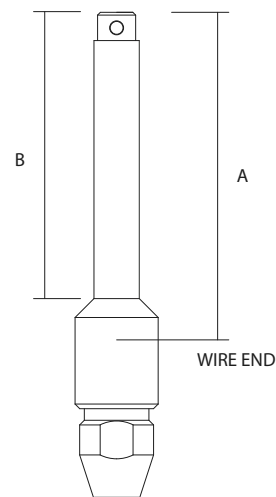


1x19 WIRE		7 STRAND WIRE		WIRE SIZE		A		B		THREAD	WEIGHT		PRICE
REFERENCE		REFERENCE		MM	INCH	MM	INCH	MM	INCH	UNF	KG	LB	£
036-03		736-03		3 MM & 1/8"		64.3	2.532	55.6	2.187	1/4	0.020	0.044	28.90
036-04-1/4		736-04-1/4		4 MM & 5/32"		65.0	2.562	55.6	2.187	1/4	0.040	0.088	22.20
036-04		736-04		4 MM & 5/32"		67.5	2.656	58.7	2.312	5/16	0.060	0.132	22.20
036-05-5/16	~	736-05-5/16	~	5	~	70.6	2.780	58.7	2.312	5/16	0.080	0.176	26.30
036-05	~	736-05	~	5	~	78.0	3.062	66.7	2.625	3/8	0.080	0.176	26.30
~	136-05-5/16	~	836-05-5/16	~	3/16	65.0	2.562	58.7	2.312	5/16	0.080	0.176	26.30
~	136-05	~	836-05	~	3/16	78.0	3.062	66.7	2.625	3/8	0.080	0.176	26.30
~	136-55	~	836-55	~	7/32	84.0	3.312	66.7	2.625	3/8	0.120	0.265	34.00
~	136-55-7/16	~	836-55-7/16	~	7/32	85.0	3.343	74.6	2.937	7/16	0.140	0.309	34.00
036-06-3/8	~	736-06-3/8	~	6	~	84.0	3.312	66.7	2.625	3/8	0.120	0.265	34.00
036-06	~	736-06	~	6	~	93.0	3.656	74.6	2.937	7/16	0.140	0.309	34.00
~	136-06-3/8	~	836-06-3/8	~	1/4	84.0	3.312	66.7	2.625	3/8	0.120	0.265	34.00
~	136-06	~	836-06	~	1/4	93.0	3.656	74.6	2.937	7/16	0.140	0.309	34.00
~	136-06-1/2	~	836-06-1/2	~	1/4	94.0	3.687	81.0	3.187	1/2	0.160	0.353	34.00
036-07-7/16		736-07-7/16		7 MM & 9/32"		95.0	3.750	74.6	2.937	7/16	0.180	0.397	41.70
036-07		736-07		7 MM & 9/32"		97.0	3.812	81.0	3.187	1/2	0.200	0.441	41.70
036-08		736-08		8 MM & 5/16"		98.0	3.875	81.0	3.187	1/2	0.240	0.529	49.50
036-08-5/8		736-08-5/8		8 MM & 5/16"		110.0	4.343	95.2	3.750	5/8	0.300	0.661	49.50
036-10	~	736-10	~	10	~	111.0	4.375	95.2	3.750	5/8	0.360	0.794	70.00
036-10-3/4	~	736-10-3/4	~	10	~	129.0	5.062	123.8	4.875	3/4	0.480	1.058	73.70
~	136-10	~	836-10	~	3/8	111.0	4.375	95.2	3.750	5/8	0.360	0.794	70.00
~	136-10-3/4	~	836-10-3/4	~	3/8	129.0	5.062	123.8	4.875	3/4	0.480	1.058	73.70
~	136-11	~	836-11	~	7/16	139.0	5.468	123.8	4.875	3/4	0.760	1.676	172.00
~	136-11-7/8	~	836-11-7/8	~	7/16	168.0	5.625	139.7	5.500	7/8	0.880	1.940	172.00
036-12	~	736-12	~	12	~	139.0	5.468	123.8	4.875	3/4	0.760	1.676	172.00
036-12-7/8	~	736-12-7/8	~	12	~	168.0	5.625	139.7	5.500	7/8	0.880	1.940	172.00
~	136-12	~	836-12	~	1/2	139.0	5.468	123.8	4.875	3/4	0.760	1.676	172.00
~	136-12-7/8	~	836-12-7/8	~	1/2	162.0	6.375	139.7	5.500	7/8	0.880	1.940	172.00
036-14		736-14		14 MM & 9/16"		170.0	6.687	139.7	5.500	7/8	1.300	2.866	199.80
036-14-100		736-14-100		14 MM & 9/16"		170.0	6.687	139.7	5.500	1	1.420	3.131	216.50
036-16		736-16		16 MM & 5/8"		171.0	6.750	139.7	5.500	1	1.660	3.660	249.80
036-19		~		19 MM & 3/4"		213.0	8.375	171.5	6.750	1 1/8	3.140	6.923	541.30
036-22		~		22 MM & 7/8		275.0	10.812	227.0	8.937	1 1/4	4.540	10.009	748.30
036-26		~		26 MM & 1"		284.0	11.187	232.0	9.125	1 3/8	5.100	11.244	903.90

Metric Only

Inch Only

+44 (0) 1206 390 773 | enquiries@stalok.com

Sta-Lok Fork

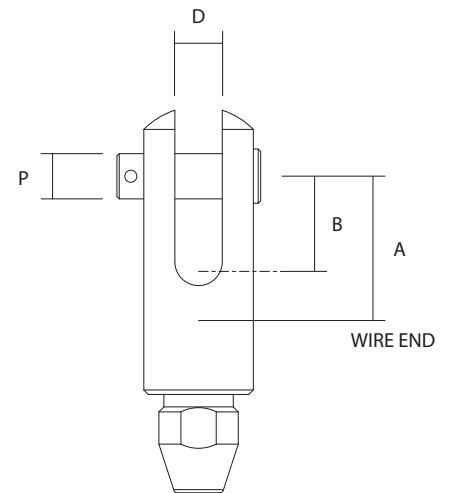

- ▶ Sta-Lok Self Fit Terminal, the reusable alternative to swage
- ▶ Only basic hand tools required
- ▶ Quick and easy to install
- ▶ No pre-measurement needed
- ▶ Guaranteed stronger than wire rope
- ▶ Manufactured from high specification 316 stainless steel
- ▶ For right hand and left hand lay wire rope
- ▶ Packed for 1x19 wire as standard
- ▶ Different wedges are available to terminate 7 strand & compacted wire ropes

REFERENCE		WIRE SIZE		A		B		D		P		WEIGHT		PRICE
		MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	KG	LB	£
034-03		3 MM & 1/8"		15.5	0.609	10.0	0.393	5.5	0.216	5.0	3/16	0.040	0.088	22.20
034-04		4 MM & 5/32"		21.1	0.830	14.7	0.580	6.4	0.250	6.4	1/4	0.060	0.132	25.80
034-05	~	5	-	29.5	1.162	18.0	0.708	8.0	0.315	8.0	5/16	0.100	0.220	29.40
~	134-05	-	3/16	29.5	1.162	18.0	0.708	8.0	0.315	8.0	5/16	0.100	0.220	29.40
~	134-55	-	7/32	37.1	1.459	22.2	0.875	11.1	0.437	10.9	7/16	0.220	0.485	40.20
034-06	~	6	-	37.1	1.459	22.2	0.875	11.1	0.437	10.9	7/16	0.220	0.485	40.20
~	134-06	-	1/4	37.1	1.459	22.2	0.875	11.1	0.437	10.9	7/16	0.220	0.485	40.20
034-07		7 MM & 9/32"		33.9	1.333	25.1	0.990	11.1	0.437	10.9	7/16	0.240	0.529	53.00
034-07-1/2		7 MM & 9/32"		43.9	1.729	26.3	1.035	13.7	0.540	12.6	1/2	0.420	0.926	61.80
034-08		8 MM & 5/16"		43.9	1.729	26.3	1.035	13.7	0.540	12.6	1/2	0.420	0.926	63.40
034-10	~	10	-	50.1	1.973	29.4	1.155	13.7	0.540	15.6	5/8	0.620	1.367	79.50
~	134-10	-	3/8	50.1	1.973	29.4	1.155	13.7	0.540	15.6	5/8	0.620	1.367	79.50
~	134-11	-	7/16	46.0	1.812	33.3	1.312	19.1	0.750	18.5	3/4	1.180	2.601	196.30
034-12	~	12	-	46.0	1.812	33.3	1.312	19.1	0.750	18.5	3/4	1.180	2.601	196.30
~	134-12	-	1/2	46.0	1.812	33.3	1.312	19.1	0.750	18.5	3/4	1.180	2.601	196.30
034-14		14 MM & 9/16"		54.0	2.125	38.1	1.500	20.4	0.803	21.5	7/8	1.580	3.483	244.10
034-16		16 MM & 5/8"		72.7	2.861	40.0	1.576	20.4	0.803	25.0	1	1.980	4.365	312.10
034-19		19 MM & 3/4"		92.0	3.622	50.0	1.970	27.8	1.093	27.5	1 1/16	4.100	9.039	590.70
034-22		22 MM & 7/8"		92.0	3.622	60.3	2.375	34.9	1.375	33.0	1 5/16	5.600	12.346	698.34
034-26		26 MM & 1"		92.0	3.622	60.3	2.375	34.9	1.375	33.0	1 5/16	7.600	16.755	836.40

Metric Only


Inch Only

+44 (0) 1206 390 773 | enquiries@stalok.com

Sta-Lok Toggle Fork



- ▶ Sta-Lok Self Fit Terminal, the reusable alternative to swage
- ▶ Only basic hand tools required
- ▶ Quick and easy to install
- ▶ No pre-measurement needed
- ▶ Guaranteed stronger than wire rope
- ▶ Manufactured from high specification 316 stainless steel
- ▶ For right hand and left hand lay wire rope
- ▶ Packed for 1x19 wire as standard
- ▶ Different wedges are available to terminate 7 strand & compacted wire ropes

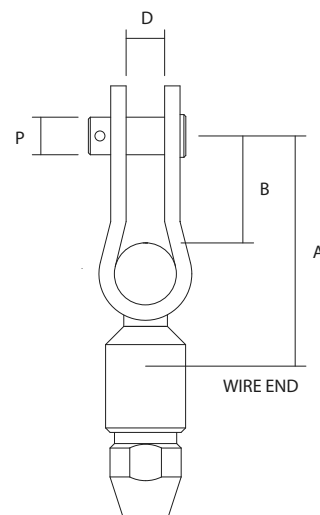


REFERENCE		WIRE SIZE		A		B		D		P		WEIGHT		PRICE
		MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	KG	LB	£
050-04		4MM & 5/32"		48.0	1.890	19.0	0.750	8.4	0.331	7.9	5/16	0.080	0.176	33.00
050-05-5/16	~	5	~	48.0	1.890	19.0	0.750	8.4	0.331	7.9	5/16	0.100	0.220	35.00
050-05	~	5	~	56.0	2.205	20.0	0.787	9.9	0.390	9.5	3/8	0.140	0.309	36.60
~	150-05-5/16	~	3/16	48.0	1.890	19.0	0.748	8.4	0.453	7.9	5/16	0.100	0.220	35.00
~	150-05	~	3/16	56.0	2.205	20.0	0.787	9.9	0.390	9.5	3/8	0.140	0.309	36.60
~	150-55	~	7/32	56.0	2.205	20.0	0.787	9.9	0.390	9.5	3/8	0.180	0.397	44.80
~	150-55-7/16	~	7/32	61.0	2.406	25.0	0.984	11.5	0.453	11.1	7/16	0.220	0.485	45.90
050-06-3/8	~	6	~	56.0	2.205	20.0	0.787	9.9	0.390	9.5	3/8	0.180	0.397	44.80
050-06	~	6	~	61.0	2.406	25.0	0.984	11.5	0.453	11.1	7/16	0.220	0.485	45.80
~	150-06	~	1/4	65.9	2.594	28.0	1.102	13.1	0.516	12.7	1/2	0.300	0.661	44.80
050-07		7 MM & 9/32"		70.0	2.755	28.0	1.102	13.1	0.516	12.7	1/2	0.340	0.750	49.50
050-08		8 MM & 5/16"		72.0	2.835	28.0	1.102	13.1	0.516	12.7	1/2	0.400	0.882	61.80
050-08-5/8		8 MM & 5/16"		87.0	3.422	33.0	1.299	16.3	0.642	16.0	5/8	0.600	1.323	67.00
050-10	~	10	~	87.0	3.422	33.0	1.299	16.3	0.642	16.0	5/8	0.680	1.499	85.00
~	150-10	~	3/8	87.0	3.422	33.0	1.299	16.3	0.642	16.0	5/8	0.660	1.455	85.00
050-12	~	12	~	104.0	4.094	34.0	1.339	25	0.984	19.1	3/4	0.680	1.499	170.00

Metric Only

Inch Only

+44 (0) 1206 390 773 | enquiries@stalok.com

Sta-Lok Long Stud

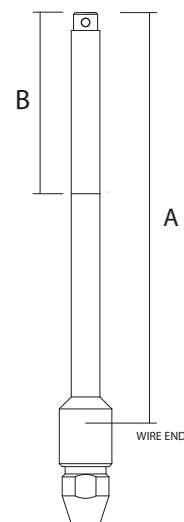

- ▶ Sta-Lok Self Fit Terminal, the reusable alternative to swage
- ▶ Enables replacement of swages without having to replace the wire rope
- ▶ Only basic hand tools required
- ▶ Quick and easy to install
- ▶ No pre-measurement needed
- ▶ Guaranteed stronger than wire rope
- ▶ Manufactured from high specification 316 stainless steel
- ▶ For right hand and left hand lay wire rope
- ▶ Packed for 1x19 wire as standard
- ▶ Different wedges are available to terminate 7 strand & compacted wire ropes
- ▶ Supplied with split pin
- ▶ Right hand thread only

REFERENCE		WIRE SIZE		THREAD	A		B		WEIGHT		PRICE
		MM	INCH	UNF	MM	INCH	MM	INCH	KG	LB	£
076-04		4 MM & 5/32"		5/16	141.3	5.562	54.0	2.125	0.080	0.176	30.40
076-05-5/16	~	5	~	5/16	154.0	6.062	54.0	2.125	0.120	0.265	33.50
076-05	~	5	~	3/8	166.6	6.562	66.7	2.625	0.160	0.353	31.40
~	176-05-5/16	~	3/16	5/16	154.0	6.062	54.0	2.125	0.120	0.265	33.50
~	176-05	~	3/16	3/8	166.6	6.562	66.7	2.625	0.160	0.353	31.40
~	176-55	~	7/32	3/8	180.2	7.094	66.7	2.625	0.180	0.397	36.00
~	176-55-7/16	~	7/32	7/16	188.5	7.422	76.2	3.000	0.220	0.485	39.20
076-06-3/8	~	6	~	3/8	180.2	7.094	66.7	2.625	0.180	0.397	38.20
076-06	~	6	~	7/16	188.5	7.422	76.2	3.000	0.220	0.485	39.20
~	176-06-3/8	~	1/4	3/8	180.2	7.094	66.7	2.625	0.180	0.397	38.20
~	176-06	~	1/4	7/16	188.5	7.422	76.2	3.000	0.220	0.485	39.20
~	176-06-1/2	~	1/4	1/2	225.4	8.875	82.6	3.250	0.300	0.661	50.00
076-07		7 MM & 9/32"		1/2	225.4	8.875	82.6	3.250	0.380	0.838	56.20
076-08		8 MM & 5/16"		1/2	225.4	8.875	82.6	3.250	0.420	0.926	60.80
076-08-5/8		8 MM & 5/16"		5/8	271.5	10.687	95.2	3.750	0.600	1.323	62.40
076-10	~	10	~	5/8	272.3	10.719	95.2	3.750	0.700	1.543	85.50
~	176-10	~	3/8	5/8	272.3	10.719	95.2	3.750	0.700	1.543	85.50
~	176-11	~	7/16	3/4	339.7	13.375	115.1	4.531	1.300	2.866	181.30
076-12	~	12	~	3/4	339.7	13.375	115.1	4.531	1.300	2.866	181.30
~	176-12	~	1/2	3/4	339.7	13.375	115.1	4.531	1.300	2.866	181.30
076-14		14 MM & 9/16"		7/8	384.2	15.125	139.7	5.500	2.230	4.916	232.80
076-16		16 MM & 5/8"		1	442.0	17.041	139.7	5.500	2.850	6.283	350.70

Metric Only


Inch Only

+44 (0) 1206 390 773 | enquiries@stalok.com

Sta-Lok Long Eye



- ▶ Sta-Lok Self Fit Terminal, the reusable alternative to swage
- ▶ Enables replacement of swages without having to replace the wire rope
- ▶ Only basic hand tools required
- ▶ Quick and easy to install
- ▶ No pre-measurement needed
- ▶ Guaranteed stronger than wire rope
- ▶ Manufactured from high specification 316 stainless steel
- ▶ For right hand and left hand lay wire rope
- ▶ Packed for 1x19 wire as standard
- ▶ Different wedges are available to terminate 7 strand & compacted wire ropes

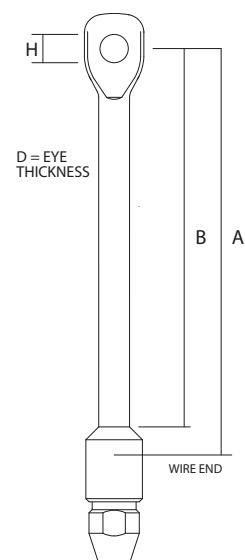

REFERENCE		WIRE SIZE		A		B		D		H		WEIGHT		PRICE
		MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	KG	LB	£
078-05	~	5	~	106.0	4.187	82.5	3.250	7.5	0.295	9.8	3/8	0.120	0.265	37.10
~	178-05	~	3/16	106.0	4.187	82.5	3.250	7.5	0.295	9.8	3/8	0.120	0.265	37.10
~	178-55-3/8	~	7/32	126.0	4.875	100.0	3.937	7.5	0.295	9.8	3/8	0.200	0.441	36.60
~	178-55	~	7/32	126.0	4.875	100.0	3.937	9.5	0.375	11.5	7/16	0.200	0.441	36.60
078-06-3/8	~	6	~	126.0	4.875	100.0	3.937	7.5	0.295	9.8	3/8	0.200	0.441	42.30
078-06	~	6	~	126.0	4.875	100.0	3.937	9.5	0.375	11.5	7/16	0.200	0.441	43.30
078-06-1/2	~	6	~	147.0	5.750	117.5	4.625	12.0	0.472	13.0	1/2	0.260	0.573	47.90
~	178-06-3/8	~	1/4	126.0	4.875	100.0	3.937	7.5	0.295	9.8	3/8	0.200	0.441	42.30
~	178-06	~	1/4	147.0	5.750	117.5	4.625	12.0	0.472	13.0	1/2	0.260	0.573	43.30
078-07		7 MM & 9/32"		147.0	5.781	117.5	4.625	12.0	0.472	13.0	1/2	0.300	0.661	50.50
078-08		8 MM & 5/16"		147.0	5.781	117.5	4.625	12.0	0.472	13.0	1/2	0.360	0.794	56.70
078-08-5/8		8 MM & 5/16"		175.0	6.889	136.4	5.369	13.5	0.531	16.0	5/8	0.540	1.190	68.00
078-10	~	10	~	175.0	6.889	136.4	5.369	13.5	0.531	16.0	5/8	0.640	1.411	83.95
~	178-10	~	3/8	175.0	6.889	136.4	5.369	13.5	0.531	16.0	5/8	0.640	1.411	82.90
~	178-11	~	7/16	254.0	10.000	205.8	8.102	19.0	0.748	19.5	3/4	1.300	2.866	168.50
078-12	~	12	~	254.0	10.000	205.8	8.102	19.0	0.748	19.5	3/4	1.300	2.866	167.40
~	178-12	~	1/2	254.0	10.000	205.8	8.102	19.0	0.748	19.5	3/4	1.300	2.866	167.40
078-14		14 MM & 9/16"		330.0	13.000	280.5	11.000	21.0	0.827	22.5	7/8	2.100	4.630	268.90
078-16		16 MM & 5/8"		320.0	12.600	303.6	11.955	24.0	0.945	25.6	1	2.700	5.952	416.70

Metric Only


Inch Only

+44 (0) 1206 390 773 | enquiries@stalok.com

Sta-Lok Stemball



- ▶ Sta-Lok Self Fit Terminal, the reusable alternative to swage
- ▶ Only basic hand tools required
- ▶ Quick and easy to install
- ▶ No pre-measurement needed
- ▶ Guaranteed stronger than wire rope
- ▶ Manufactured from high specification 316 stainless steel
- ▶ For right hand and left hand lay wire rope
- ▶ Packed for 1x19 wire as standard
- ▶ Different wedges are available to terminate 7 strand & compacted wire ropes
- ▶ Two part assembly - Threadlock recommended

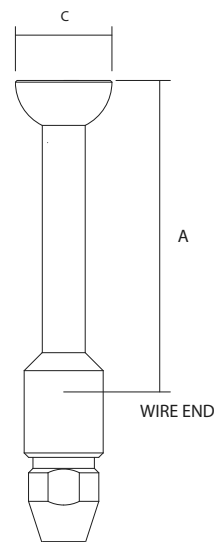

REFERENCE		WIRE SIZE		A		C		WEIGHT		PRICE
		MM	INCH	MM	INCH	MM	INCH	KG	LB	£
~	146-55	~	7/32	96.0	3.779	21.2	0.835	0.180	0.397	46.40
046-06	~	6	~	96.0	3.779	21.2	0.835	0.180	0.397	46.40
~	146-06	~	1/4	96.0	3.779	21.2	0.835	0.200	0.441	46.40
046-07		7 MM & 9/32"		110.0	4.330	21.6	0.850	0.280	0.617	59.30
046-08		8 MM & 5/16"		125.0	4.921	26.5	1.043	0.380	0.838	67.00
046-10	~	10	~	168.0	6.614	27.6	1.086	0.500	1.102	95.30
~	146-10	~	3/8	168.0	6.614	27.6	1.086	0.500	1.102	95.30

No cups are supplied with a Sta-Lok stemball.

Metric Only


Inch Only

+44 (0) 1206 390 773 | enquiries@stalok.com

Stemball Cup




- ▶ Manufactured from high specification 316 stainless steel
- ▶ Used to fit Stemball fittings into spreader bracket

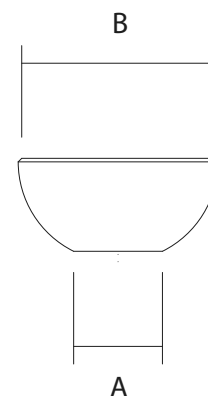


REFERENCE	WIRE SIZE		A		B		WEIGHT		PRICE
	MM	INCH	MM	INCH	MM	INCH	KG	LB	£
042C-4	4	5/32	9.0	0.354	26.0	1.024	0.016	0.035	7.80
042C-5	5	3/16	11.2	0.441	26.0	1.024	0.014	0.031	7.80
042C-6/7	6-7	7/32, 1/4, 9/32	16.0	0.630	26.0	1.024	0.016	0.035	7.80
042C-8/10	8-10	5/16, 3/8	20.0	0.787	34.0	1.339	0.017	0.037	8.80

One or two stemball cups may be required to bring the head size up to fit the mast/spreader brackets.

Sta-Lok Stay Connector



- ▶ Joins 2 pieces of wire rope
- ▶ Quick and easy to install
- ▶ Only basic hand tools required
- ▶ Manufactured from high specification 316 stainless steel
- ▶ For right hand and left hand lay wire rope
- ▶ Packed for 1x19 wire as standard
- ▶ Different wedges are available to terminate 7 strand and compacted wire ropes

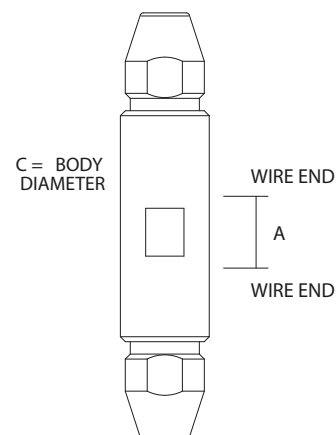

REFERENCE		WIRE SIZE		A		C		WEIGHT		PRICE
		MM	INCH	MM	INCH	MM	INCH	KG	LB	£
072-04		4 MM & 5/32"		11.1	0.437	14.3	0.562	0.060	0.132	38.70
072-05	~	5	~	14.3	0.563	15.9	0.625	0.080	0.176	44.80
~	172-05	~	3/16	14.3	0.563	15.9	0.625	0.080	0.176	44.80
~	172-55	~	7/32	20.6	0.812	19.1	0.750	0.160	0.353	52.00
072-06	~	6	~	20.6	0.812	19.1	0.750	0.160	0.353	52.00
~	172-06	~	1/4	20.6	0.812	19.1	0.750	0.160	0.353	52.00
072-07		7 MM & 9/32"		19.1	0.750	22.2	0.875	0.240	0.529	58.70
072-08		8 MM & 5/16"		19.1	0.750	25.4	1.000	0.300	0.661	65.40
072-10	~	10	~	24.0	0.937	28.6	1.125	0.420	0.926	91.70
~	172-10	~	3/8	24.0	0.937	28.6	1.125	0.420	0.926	91.70
~	172-11	~	7/16	25.4	1.000	34.9	1.375	0.900	1.984	158.10
072-12	~	12	~	25.4	1.000	34.9	1.375	0.900	1.984	158.10
~	172-12	~	1/2	25.4	1.000	34.9	1.375	0.900	1.984	158.10

Metric Only

Inch Only

+44 (0) 1206 390 773 | enquiries@stalok.com



bespoke back up

Using only simple hand tools, a range of long terminals, connectors and turnbuckles can be fitted to repair stays and shrouds in a matter of minutes.


You can choose a custom combination of fittings for your boat and have it delivered in a custom pouch for your storage convenience.

To discuss the perfect spares solution for your boat ring **+44 (0) 1206 390 773** or email **enquiries@stalok.com**

Sta-Lok Insulator Terminal to Terminal



- ▶ Use on standing rigging to provide radio antenna
- ▶ Guaranteed stronger than the wire rope
- ▶ Incorporates Sta-Lok Self fit termination
- ▶ Quick and easy to install
- ▶ Packed for 1x19 wire as standard
- ▶ Manufactured from high specification 316 stainless steel
- ▶ Different wedges are available to terminate 7 strand and compacted strand wire ropes

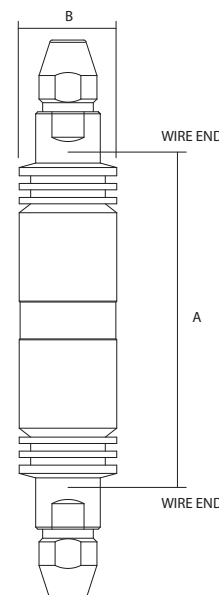

REFERENCE		WIRE SIZE		A		B		WEIGHT		PRICE
		MM	INCH	MM	INCH	MM	INCH	KG	LB	
~	143-55	~	7/32	114.0	4.488	35.0	1.375	0.459	1.012	130.00
043-06	~	6	~	114.0	4.488	35.0	1.375	0.459	1.012	130.00
~	143-06	~	1/4	114.0	4.488	35.0	1.375	0.459	1.012	130.00
043-07		7MM & 9/32		112.0	4.409	38.0	1.500	0.625	1.378	150.70
043-08		8MM & 5/16		112.0	4.409	38.0	1.500	0.626	1.380	157.10
043-10	~	10	~	121.0	4.764	41.0	1.625	0.851	1.876	208.20
~	143-10	~	3/8	121.0	4.764	41.0	1.625	0.851	1.876	208.20
~	143-11	~	7/16	149.0	5.866	52.0	2.000	2.100	4.630	311.50
043-12*	~	12	~	149.0	5.866	52.0	2.000	2.100	4.630	311.50
~	143-12	~	1/2	149.0	5.866	52.0	2.000	2.100	4.630	311.50

ELECTRICAL PROPERTIES

Impedance Measurement @15MHz
Capacitance 16pF Resistance 400K

D.C.Leakage Resistance @ 30Kv
Greater than 10 G Ohms

Voltage Proof Test

*Withstands 30 Kv applied for 2 hours without breakdown
No change in 15 MHz impedance after voltage proof test*

*Achieves 93% of rated breaking load on 12mm compacted strand wire rope.

Metric Only


Inch Only

+44 (0) 1206 390 773 | enquiries@stalok.com

Sta-Lok Insulator Swage to Swage



- ▶ Use on standing rigging to provide radio antenna
- ▶ Guaranteed stronger than the wire rope
- ▶ Requires professional swaging
- ▶ Quick and easy to install
- ▶ Packed for 1x19 wire as standard
- ▶ Manufactured from high specification 316 stainless steel



REFERENCE	WIRE SIZE		A		B		WEIGHT		PRICE
	MM	INCH	MM	INCH	MM	INCH	KG	LB	£
093-06	6	~	114.0	4.488	35.0	1.378	0.580	1.279	138.50
093-07	7 MM & 9/32"		112.0	4.409	38.0	1.496	0.792	1.746	162.40
093-08	8 MM & 5/16"		112.0	4.409	38.0	1.496	0.868	1.914	172.00
093-10	10	~	121.0	4.764	41.0	1.614	1.145	2.524	225.80
093-12*	12	~	149.0	5.866	51.0	2.008	2.702	5.957	291.80

ELECTRICAL PROPERTIES

Impedance Measurement @15MHz
Capacitance 16pF Resistance 400K

D.C. Leakage Resistance @ 30Kv
Greater than 10 G Ohms

Voltage Proof Test

*Withstands 30 Kv applied for 2 hours without breakdown
No change in 15 MHz impedance after voltage proof test*

*Achieves 93% of rated breaking load on 12mm compacted strand wire rope.

Metric Only


Inch Only

+44 (0) 1206 390 773 | enquiries@stalok.com

Sta-Lok Insulator Body



- ▶ Main body of the Sta-Lok Insulator
- ▶ Guaranteed stronger than the wire rope
- ▶ Variety of end fittings available

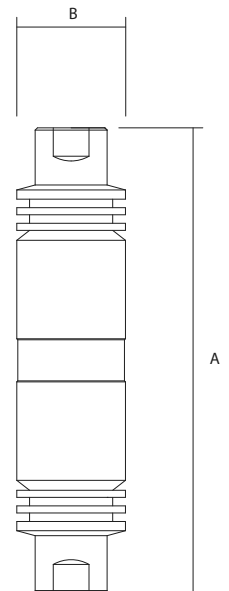

REFERENCE	WIRE SIZE		A		B		WEIGHT		PRICE
	MM	INCH	MM	INCH	MM	INCH	KG	LB	£
206-06	6	7/32 & 1/4	152.0	6.000	35.0	1.375	0.370	0.816	98.00
206-08	7 & 8	9/32 & 5/16	164.0	6.500	38.0	1.500	0.474	1.045	113.40
206-10	10	3/8	175.0	6.875	41.0	1.625	0.605	1.334	143.80
206-12*	12	7/16 & 1/2	215.0	8.500	52.0	2.000	1.700	3.748	164.00

ELECTRICAL PROPERTIES

Impedance Measurement @15MHz
Capacitance 16pF Resistance 400K

D.C.Leakage Resistance @ 30Kv
Greater than 10 G Ohms

Voltage Proof Test


*Withstands 30 Kv applied for 2 hours without breakdown
No change in 15 MHz impedance after voltage proof test*

*Achieves 93% of rated breaking load on 12mm compacted strand wire rope.

Sta-Lok Insulator Swage Part




- ▶ Swage part for insulators
- ▶ Screws directly into insulator body
- ▶ Requires professional swaging



REFERENCE	WIRE SIZE		BSF THREAD	A		WEIGHT		PRICE
	MM	INCH		MM	INCH	KG	LB	
203-06	6	~	5/8	12.4	0.489	0.105	0.231	31.90
203-07	7 MM & 9/32"		3/4	14.2	0.558	0.159	0.351	34.00
203-08	8 MM & 5/16"		3/4	16.1	0.630	0.197	0.434	34.00
203-10	10	~	7/8	17.7	0.698	0.270	0.595	41.20
203-12	12	~	1 1/8	21.3	0.839	0.501	1.105	70.60

Sta-Lok Insulator Eye Kit

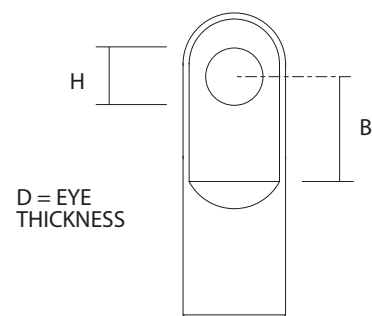

- ▶ Eye Part for Insulators
- ▶ **Includes** adaptor screw for assembly into insulator body

REFERENCE	INSULATOR	B		D		H		WEIGHT		PRICE
	BODY REF	MM	INCH	MM	INCH	MM	INCH	KG	LB	
20907-55	206-06	23.0	0.940	9.5	0.375	11.5	7/16	0.137	0.302	22.20
20907-06	206-06	22.2	0.875	9.5	0.375	13.0	1/2	0.137	0.302	22.20
20907-07	206-08	24.6	0.969	10.5	0.413	13.0	1/2	0.179	0.395	38.60
20907-08	206-08	27.0	1.062	12.0	0.472	13.0	1/2	0.156	0.344	42.80
20907-08-5/8	206-08	27.0	1.062	13.5	0.531	16.0	5/8	0.276	0.608	63.90
20907-10	206-10	29.2	1.150	13.5	0.531	16.0	5/8	0.336	0.741	69.00
20907-12	206-12	33.3	1.312	19.0	0.748	19.5	3/4	0.486	1.071	85.50

Thread lock is **recommended** to use with this product

Metric Only

Inch Only

+44 (0) 1206 390 773 | enquiries@stalok.com

Sta-Lok Socket, Wedge & Former Kit



- ▶ Recommended where Sta-Lok terminals are being re-used
- ▶ Consists of Socket, Wedge & Former Components
- ▶ ***227-07** is a special Terminal Part for Insulators ONLY
- ▶ Packed for 1x19 as standard
- ▶ Different wedges are available to terminate 7 strand & compacted wire ropes

REFERENCE		WIRE SIZE		WEIGHT		PRICE
		MM	INCH	KG	LB	£
208-04		4MM & 5/32"		0.020	0.044	11.30
208-05	~	5	~	0.021	0.046	11.90
~	211-05	~	3/16	0.024	0.053	12.90
~	211-55	~	7/32	0.015	0.033	18.00
208-06	~	6	~	0.040	0.088	18.00
~	211-06	~	1/4	0.040	0.088	18.00
208-07		7MM & 9/32"		0.060	0.132	19.00
227-07*		7MM & 9/32"		0.058	0.128	21.10
208-08		8MM & 5/16"		0.074	0.163	22.20
208-10	~	10	~	0.116	0.256	30.90
~	211-10	~	3/8	0.116	0.256	30.90
~	211-11	~	7/16	0.116	0.256	54.60
~	211-12	~	1/2	0.216	0.476	54.60
208-12	~	12	~	0.217	0.478	54.60
208-14		14MM & 9/16"		0.500	1.102	87.00
208-16		16MM & 5/8"		0.660	1.455	111.30
208-19		19MM & 3/4"		1.320	2.910	239.00
208-22		22MM & 7/8"		1.700	3.748	219.00
208-26		25MM & 1"		2.260	4.980	411.00

Metric Only

Inch Only

+44 (0) 1206 390 773 | enquiries@stalok.com

Sta-Lok Wedge 1x19



- ▶ Must be replaced where Sta-Lok terminals are being re-used
- ▶ Must NOT be used for Dyform, compacted or 7stand wire ropes
- ▶ Laser marked for easy identification

REFERENCE		WIRE SIZE		PACKAGE	WEIGHT (PER PACK)		PRICE £
		MM	INCH	QUANTITY	KG	LB	PER PACK
126-03		3 MM & 1/8"		5	0.006	0.013	11.90
126-04		4 MM & 5/32"		5	0.010	0.022	17.00
126-05	~	5	~	5	0.015	0.033	17.50
~	138-05	~	3/16	5	0.016	0.035	17.50
~	138-55	~	7/32	5	0.034	0.075	22.30
126-06	~	6	~	5	0.150	0.331	22.30
~	138-06	~	1/4	5	0.151	0.333	22.30
126-07		7 MM & 9/32"		5	0.195	0.430	23.50
126-08		8 MM & 5/16"		2	0.054	0.119	12.00
126-10	~	10	~	2	0.096	0.212	16.60
~	138-10	~	3/8	2	0.097	0.214	16.60
~	138-11	~	7/16	1	0.048	0.106	11.20
126-12	~	12	~	1	0.042	0.093	11.20
~	138-12	~	1/2	1	0.043	0.095	11.20
126-14		14 MM & 9/16"		1	0.069	0.152	19.50
126-16		16 MM & 5/8"		1	0.110	0.243	22.70
126-19		19 MM & 3/4"		1	0.180	0.397	71.60
126-22		22 MM & 7/8"		1	0.260	0.573	77.60
126-26		26 MM & 1"		1	0.380	0.838	80.90

Metric Only

Inch Only

Need technical advice?

Our sales team is on hand to help you with any technical queries you may have to help you complete your project.

Order & Enquiries
enquiries@stalok.com
+44 (0) 1206 390 773



Sta-Lok Dyform & Compacted Wedges



Compacted strand and Dyform wire rope design characteristics provide higher breaking loads and lower stretch than conventional 1 x 19 wire. There are 5 different constructions **(1x7)**, **(1x19)**, **(1x25)**, **(1x31)** and **(1x36)**. Sta-Lok Swageless Self Fit terminals will terminate each of these constructions using different wedges (see following tables).

1x7 construction

REFERENCE	WIRE (mm)	COMPACTED	DYFORM	PACKAGE	WEIGHT (PER PACK)		PRICE £
				QUANTITY	KG	LB	PER PACK
154-03C	3	Yes	No	5	0.005	0.011	16.50
154-04	4	Yes	Yes	5	0.005	0.011	19.60

1x19 construction

REFERENCE	WIRE (mm)	COMPACTED	DYFORM	PACKAGE	WEIGHT		PRICE £
				QUANTITY	KG	LB	PER PACK
154-05	5	Yes	Yes	5	0.010	0.022	20.10
154-06	6	No	Yes	5	0.025	0.055	23.30
154-06C	6	Yes	No	5	0.022	0.049	23.30
154-07	7	No	Yes	5	0.028	0.062	27.00
154-07C	7	Yes	No	5	0.025	0.055	27.00
154-08	8	Yes	Yes	2	0.017	0.037	13.80
154-10	10	Yes	Yes	2	0.033	0.073	19.00
154-12	12	No	Yes	1	0.033	0.073	12.80
154-12C19	12	Yes	No	1	0.030	0.066	12.80
154-14C19	14	Yes	No	1	0.056	0.123	22.50

1x25 construction

REFERENCE	WIRE (mm)	COMPACTED	DYFORM	PACKAGE	WEIGHT		PRICE £
				QUANTITY	KG	LB	PER PACK
154-14	14	Yes	Yes	1	0.060	0.132	22.50
154-16	16	No	Yes	1	0.110	0.243	26.20
154-16C25	16	Yes	No	1	0.110	0.243	26.20
154-19C25	19	Yes	No	1	0.140	0.309	71.60

1x31 construction

REFERENCE	WIRE (mm)	COMPACTED	DYFORM	PACKAGE	WEIGHT		PRICE £
				QUANTITY	KG	LB	PER PACK
154-19	19	No	Yes	1	0.140	0.309	71.60

1x36 construction

REFERENCE	WIRE (mm)	COMPACTED	DYFORM	PACKAGE	WEIGHT		PRICE £
				QUANTITY	KG	LB	PER PACK
154-14C36	14	Yes	No	1	0.060	0.132	22.50
154-16C	16	Yes	No	1	0.110	0.243	26.20
154-19C36	19	Yes	No	1	0.140	0.309	71.60

All wedges are laser marked for easy identification.

Sta-Lok Wedge 7 Strand



- ▶ Must be replaced where Sta-Lok terminals are being re-used
- ▶ For use with 7x7 and 7x19 stainless steel wire construction only
- ▶ Laser marked for easy identification

REFERENCE		WIRE SIZE		PACKAGE	WEIGHT (PER PACK)		PRICE £
		MM	INCH	QUANTITY	KG	LB	PER PACK
127-03		3 MM & 1/8"		5	0.004	0.009	17.90
127-04		4 MM & 5/32"		5	0.008	0.018	21.10
127-05	~	5	~	5	0.013	0.029	23.90
~	139-05	~	3/16	5	0.013	0.029	23.90
127-06	~	6	~	5	0.029	0.064	25.30
~	139-06	~	1/4	5	0.029	0.064	25.30
127-07		7 MM & 9/32"		2	0.017	0.037	27.20
127-08		8 MM & 5/16"		2	0.024	0.053	13.80
127-10	~	10	~	2	0.042	0.093	19.00
~	139-10	~	3/8	2	0.020	0.044	19.00
127-12	~	12	~	1	0.040	0.088	19.50
~	139-12	~	1/2	1	0.040	0.040	19.50
127-16		16 MM & 5/8"		1	0.101	0.223	26.20

Metric Only

Inch Only

+44 (0) 1206 390 773 | enquiries@stalok.com


Sta-Lok Former



- ▶ Recommended where Sta-Lok terminals are being re-used

REFERENCE	WIRE SIZE		PACKAGE	WEIGHT (PER PACK)		PRICE £
	MM	INCH	QUANTITY	KG	LB	PER PACK
115-03	3	1/8	5	0.005	0.011	7.90
115-04	4	5/32	5	0.005	0.011	8.00
115-05	5	3/16	5	0.010	0.022	9.40
115-06	6	7/32 & 1/4	5	0.020	0.044	10.00
115-07	7	9/32	5	0.025	0.055	11.90
115-08	8	5/16	2	0.012	0.026	5.70
115-10	10	3/8	2	0.018	0.040	7.30
115-12	12	7/16 & 1/2	1	0.020	0.044	8.40
115-14	14	9/16	1	0.043	0.095	13.80
115-16	16	5/8	1	0.063	0.139	16.70
115-19	19	3/4	1	0.121	0.267	66.50
115-22	22	7/8	1	0.158	0.348	70.00
115-26	26	1	1	0.198	0.437	81.00

Swage Stud Open Body



- ▶ Suitable for use with rotary & fixed die swaging machine
- ▶ Manufactured from high specification 316 stainless steel
- ▶ Use with 1x19, 7 Strand and compacted stand wire rope (IWRC)
- ▶ Metric and Inch wire ropes
- ▶ Minimum hole depth 10x wire diameter
- ▶ Use with open and closed body turnbuckles
- ▶ Right hand thread only
- ▶ Supplied with split pin

REFERENCE		WIRE SIZE		THREAD	A		B		WEIGHT		PRICE
		MM	INCH	UNF	MM	INCH	MM	INCH	KG	LB	£
051-03		3 MM & 1/8"		1/4	6.2	0.245	56.0	2.204	0.020	0.044	5.70
051-04-1/4		4 MM & 5/32"		1/4	7.4	0.292	56.0	2.204	0.020	0.044	5.70
051-04		4 MM & 5/32"		5/16	7.4	0.292	60.0	2.362	0.040	0.088	5.70
051-05-5/16		5 MM & 3/16"		5/16	9.0	0.354	60.0	2.362	0.040	0.088	8.80
051-05		5 MM & 3/16"		3/8	9.0	0.354	67.0	2.625	0.060	0.132	8.80
~	151-55	~	7/32	3/8	10.7	0.422	67.0	2.625	0.070	0.154	12.90
~	151-55-7/16	~	7/32	7/16	10.7	0.422	75.0	2.953	0.080	0.176	12.90
051-06-3/8	~	6	~	3/8	12.4	0.489	67.0	2.625	0.080	0.176	12.90
051-06	~	6	~	7/16	12.4	0.489	75.0	2.953	0.100	0.220	12.90
~	151-06-3/8	~	1/4	3/8	12.5	0.494	67.0	2.625	0.100	0.220	12.90
~	151-06	~	1/4	7/16	12.5	0.494	75.0	2.953	0.100	0.220	12.90
~	151-06-1/2	~	1/4	1/2	12.5	0.494	81.0	3.187	0.140	0.309	12.90
051-07-7/16		7 MM & 9/32"		7/16	14.2	0.558	75.0	2.953	0.140	0.309	20.10
051-07		7 MM & 9/32"		1/2	14.2	0.558	81.0	3.187	0.160	0.353	20.10
051-08		8 MM & 5/16"		1/2	16.1	0.630	81.0	3.187	0.180	0.397	22.70
051-08-5/8		8 MM & 5/16"		5/8	16.1	0.630	100.0	3.937	0.260	0.573	24.20
051-10	~	10	~	5/8	17.7	0.698	100.0	3.937	0.300	0.661	32.50
~	151-10	~	3/8	5/8	17.7	0.698	100.0	3.937	0.300	0.661	32.50
~	151-11	~	7/16	3/4	19.6	0.776	124.0	4.875	0.540	1.190	50.00
051-12	~	12	~	3/4	21.3	0.839	124.0	4.875	0.540	1.190	50.00
051-12-7/8	~	12	~	7/8	21.3	0.839	140.0	5.511	0.680	1.499	90.20
~	151-12	~	1/2	3/4	21.3	0.839	124.0	4.875	0.540	1.190	50.00
051-14		14 MM & 9/16"		7/8	24.9	0.979	140.0	5.511	0.900	1.984	92.70
051-16		16 MM & 5/8"		1	28.0	1.104	162.0	6.375	1.260	2.778	111.30
051-19		19 MM & 3/4"		1 1/8	34.4	1.354	184.0	7.250	2.100	4.630	200.00
051-22		22 MM & 7/8"		1 1/4	40.3	1.588	215.0	8.464	3.220	7.099	306.50
051-26		26 MM & 1"		1 3/8	45.8	1.807	220.0	8.656	4.000	8.818	354.40

Metric Only


Inch Only

+44 (0) 1206 390 773 | enquiries@stalok.com

Swage Fork



- ▶ Manufactured from high specification 316 stainless steel
- ▶ Suitable for use with rotary & fixed die swaging machine
- ▶ Use with 1x19, 7 Strand and compacted stand wire rope (IWRC)
- ▶ Designed to suit most chain plates and fixing points
- ▶ Minimum hole depth 10x wire diameter
- ▶ Metric and Inch wire ropes

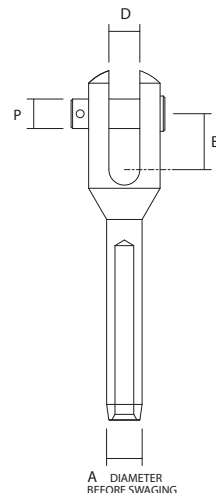

REFERENCE		WIRE SIZE		A		B		D		P		WEIGHT		PRICE
		MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	KG	LB	£
035-03		3 MM & 1/8"		6.2	0.245	10.0	0.393	6.4	0.252	6.2	1/4	0.020	0.044	11.40
035-04		4 MM & 5/32"		7.4	0.292	14.7	0.580	7.9	0.311	7.7	5/16	0.060	0.132	11.90
035-05		5 MM & 3/16"		9.0	0.354	17.5	0.687	9.5	0.374	9.3	3/8	0.100	0.220	19.60
~	135-55	~	7/32	10.7	0.422	19.0	0.748	11.1	0.437	10.9	7/16	0.160	0.353	25.30
035-06	~	6	~	12.4	0.489	19.0	0.748	11.1	0.437	10.9	7/16	0.160	0.353	25.30
~	135-06	~	1/4	12.5	0.494	19.0	0.748	11.1	0.437	10.9	7/16	0.160	0.353	26.30
035-07		7 MM & 9/32"		14.2	0.558	25.1	0.990	11.1	0.437	10.9	7/16	0.200	0.441	35.60
035-08		8 MM & 5/16"		16.1	0.630	25.1	0.990	12.7	0.500	12.6	1/2	0.340	0.750	37.60
035-10	~	10	~	17.7	0.698	29.4	1.155	15.9	0.625	15.6	5/8	0.560	1.235	60.80
~	135-10	~	3/8	17.7	0.698	29.4	1.155	15.9	0.625	15.6	5/8	0.560	1.235	60.30
~	135-11	~	7/16	19.6	0.716	33.3	1.312	19.1	0.750	18.5	3/4	0.900	1.984	160.20
035-12	~	12	~	21.3	0.839	33.3	1.312	19.1	0.750	18.5	3/4	0.900	1.984	160.20
~	135-12	~	1/2	21.3	0.839	33.3	1.312	19.1	0.750	18.5	3/4	0.900	1.984	160.20
035-14		14 MM & 9/16"		24.9	0.979	38.1	1.500	22.2	0.875	21.5	7/8	1.600	3.527	226.60
035-16		16 MM & 5/8"		28.0	1.104	40.0	1.576	25.4	1.000	25.0	1	1.700	3.748	276.60
035-19		19 MM & 3/4"		34.4	1.354	50.0	1.970	28.6	1.125	28.2	1 1/8	2.500	5.512	356.40
035-22		22 MM & 7/8"		40.3	1.588	60.3	2.375	31.8	1.250	31.5	1 1/4	3.620	7.981	579.90
035-26		26 MM & 1"		45.8	1.807	60.3	2.375	35.0	1.375	34.6	1 3/8	5.000	11.023	770.00

Metric Only


Inch Only

+44 (0) 1206 390 773 | enquiries@stalok.com

Swage Stud Closed Body



- ▶ Suitable for use with rotary & fixed die swaging machine
- ▶ Manufactured from high specification 316 stainless steel
- ▶ Use with 1x19, 7 Strand and compacted stand wire rope (IWRC)
- ▶ Metric and Inch wire ropes
- ▶ Nut supplied separately
- ▶ Minimum hole depth 10x wire diameter
- ▶ Use with closed body turnbuckles only
- ▶ Right and left hand thread available




REFERENCE		WIRE SIZE		THREAD	A		B		WEIGHT		PRICE
Left Hand	Right Hand	MM	INCH	METRIC	MM	INCH	MM	INCH	KG	LB	£
061-03-M6L	061-03-M6R	3 MM & 1/8"		M6	6.2	0.244	56.0	2.206	0.020	0.044	5.70
061-04-M6L	061-04-M6R	4 MM & 5/32"		M6	7.4	0.292	56.0	2.206	0.027	0.060	5.70
061-04-M8L	061-04-M8R	4 MM & 5/32"		M8	7.4	0.292	60.0	2.364	0.044	0.097	5.70
061-05-M8L	061-05-M8R	5 MM & 3/16"		M8	9.0	0.355	60.0	2.364	0.045	0.099	8.80
061-05-M10L	061-05-M10R	5 MM & 3/16"		M10	9.0	0.355	67.0	2.640	0.058	0.128	8.80
061-06-M10L	061-06-M10R	6	~	M10	12.4	0.489	67.0	2.640	0.081	0.179	12.90
061-06-M12L	061-06-M12R	6	~	M12	12.4	0.489	81.0	3.191	0.116	0.256	12.90
061-07-M12L	061-07-M12R	7 MM & 9/32"		M12	14.2	0.559	81.0	3.191	0.160	0.353	20.10
061-08-M12L	061-08-M12R	8 MM & 5/16"		M12	16.1	0.634	81.0	3.191	0.183	0.403	22.70
061-08-M16L	061-08-M16R	8 MM & 5/16"		M16	16.1	0.634	100.0	3.940	0.280	0.611	24.20
061-10-M16L	061-10-M16R	10	~	M16	17.7	0.697	100.0	3.940	0.320	0.705	32.50
061-12-M20L	061-12-M20R	12	~	M20	21.4	0.843	124.0	4.886	0.579	1.276	50.00
061-14-M22L	061-14-M22R	14 MM & 9/16"		M22	25.0	0.985	140.0	5.516	0.856	1.887	92.70
061-16-M24L	061-16-M24R	16 MM & 5/8"		M24	28.2	1.111	162.0	6.378	1.178	2.597	111.30
061-19-M27L	061-19-M27R	19 MM & 3/4"		M27	34.5	1.359	184.0	7.250	2.100	4.630	200.00
061-22-M30L	061-22-M30R	22 MM & 7/8"		M30	40.3	1.588	200.0	7.880	3.220	7.099	306.50
061-26-M36L	061-26-M36R	26 MM & 1"		M36	45.8	1.805	220.0	8.668	4.00	8.818	354.40

Metric Only

Inch Only

+44 (0) 1206 390 773 | enquiries@stalok.com

Swage Eye

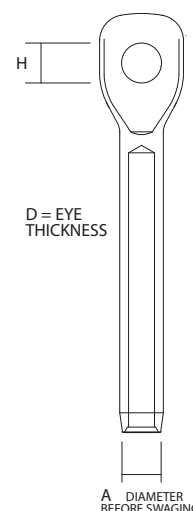

- ▶ Suitable for use with rotary & fixed die swaging machine
- ▶ Manufactured from high specification 316 stainless steel
- ▶ Use with 1x19, 7 Strand and compacted stand wire rope (IWRC)
- ▶ Minimum hole depth 10x wire diameter
- ▶ Metric and Inch wire ropes

		WIRE SIZE		A		D		H		WEIGHT		PRICE
REFERENCE		MM	INCH	MM	INCH	MM	INCH	MM	INCH	KG	LB	£
039N-03		3 MM & 1/8"		6.2	0.245	4.0	0.157	6.5	1/4	0.014	0.031	5.20
039N-04		4 MM & 5/32"		7.4	0.292	5.0	0.197	8.5	5/16	0.022	0.049	6.20
039N-05		5 MM & 3/16"		9.0	0.354	6.0	0.236	10.0	3/8	0.040	0.088	7.20
~	130N-55	~	7/32	10.7	0.422	8.0	0.315	11.5	7/16	0.100	0.220	12.40
039N-06	~	6	~	12.4	0.488	8.0	0.315	11.5	7/16	0.100	0.220	12.40
~	130N-06	~	1/4	12.5	0.494	8.0	0.315	13.0	1/2	0.100	0.220	12.40
039N-07		7 MM & 9/32"		14.2	0.558	9.0	0.354	13.0	1/2	0.120	0.265	15.00
039N-08		8 MM & 5/16"		16.1	0.630	10.0	0.394	13.0	1/2	0.180	0.397	20.60
039N-08-5/8		8 MM & 5/16"		16.1	0.630	12.0	0.472	16.5	5/8	0.240	0.529	21.60
039N-10	~	10	~	17.7	0.698	11.0	0.433	16.2	5/8	0.260	0.573	37.10
~	130N-10	~	3/8	17.7	0.698	11.0	0.433	16.0	5/8	0.240	0.529	37.10

		WIRE SIZE		A		D		H		WEIGHT		PRICE
REFERENCE		MM	INCH	MM	INCH	MM	INCH	MM	INCH	KG	LB	£
039-03		3 MM & 1/8"		6.2	0.245	5.0	0.197	6.4	1/4	0.020	0.044	6.70
039-04		4 MM & 5/32"		7.4	0.292	6.5	0.256	8.1	5/16	0.020	0.044	7.20
039-05		5 MM & 3/16"		9.0	0.354	7.8	0.307	9.6	3/8	0.040	0.088	8.30
039-06	~	6	~	12.4	0.488	9.5	0.374	11.2	7/16	0.080	0.176	13.40
039-07		7 MM & 9/32"		14.2	0.558	11.5	0.453	12.8	1/2	0.120	0.265	16.50
039-08-1/2		8 MM & 5/16"		16.1	0.630	11.5	0.453	12.8	1/2	0.140	0.309	21.60
039-08		8 MM & 5/16"		16.1	0.630	13.5	0.531	14.5	9/16	0.180	0.397	25.80
039-08-5/8		8 MM & 5/16"		16.1	0.630	15.0	0.591	16.1	5/8	0.180	0.397	35.00
039-10	~	10	~	17.7	0.698	15.0	0.591	16.1	5/8	0.240	0.529	35.60
~	130-11*	~	7/16	19.6	0.773	18.0	0.709	19.5	3/4	0.520	1.146	67.50
039-12*	~	12	~	21.4	0.842	18.0	0.709	19.5	3/4	0.520	1.146	67.50
~	130-12*	~	1/2	21.3	0.839	18.0	0.709	19.5	3/4	0.520	1.146	67.50
039-14*		14 MM & 9/16		25.0	0.979	21.0	0.827	22.5	7/8	0.800	1.764	116.40
039-16*		16 MM & 5/8"		28.2	1.104	24.4	0.961	25.7	1	1.180	2.601	133.40
039-19*		19 MM & 3/4"		34.5	1.354	27.5	1.083	28.6	1 1/8	1.900	4.189	292.50
039-22*		22 MM & 7/8"		40.3	1.588	32.0	1.260	32.0	1 1/4	2.800	6.173	377.50
039-26*		26 MM & 1"		45.8	1.807	34.0	1.339	35.0	1 3/8	3.950	8.708	732.90

*Machined not forged

+44 (0) 1206 390 773 | enquiries@stalok.com

Metric Only


Inch Only

¹machined eye shown in picture, product may vary.

Swage Eye Toggle



- ▶ Suitable for use with rotary & fixed die swaging machine
- ▶ Manufactured from high specification 316 stainless steel
- ▶ Use with 1x19, 7 Strand and compacted stand wire rope (IWRC)
- ▶ Unique toggle action for articulation in two planes
- ▶ Minimum hole depth 10x wire diameter
- ▶ Metric and Inch wire ropes
- ▶ Modular system

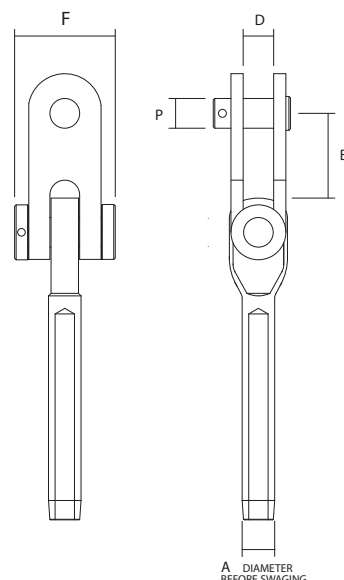


REFERENCE		WIRE SIZE		A		B		D		F		P		WEIGHT		PRICE
		MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	KG	LB	£
~	132 ET-11	~	7/16	19.6	0.776	56.0	2.205	20.0	0.787	66.0	2.598	18.5	3/4	1.420	3.131	104.00
038 ET-12	~	12	~	21.3	0.839	56.0	2.205	20.0	0.787	66.0	2.598	18.5	3/4	1.420	3.131	104.00
~	132 ET-12	~	1/2	21.3	0.839	56.0	2.205	20.0	0.787	66.0	2.598	18.5	3/4	1.420	3.131	104.00
038 ET-14		14 MM & 9/16"		24.9	0.979	63.0	2.480	25.0	0.984	78.0	3.071	21.5	7/8	2.160	4.762	185.40
038 ET-16		16 MM & 5/8"		28.0	1.104	67.5	2.657	28.0	1.102	82.0	3.228	25.0	1	3.080	6.790	219.40
038 ET-19		19 MM & 3/4"		34.4	1.354	70.0	2.756	31.5	1.240	89.0	3.504	28.2	1 1/8	4.700	10.362	401.70
038 ET-22		22 MM & 7/8"		40.3	1.588	79.0	3.110	35.0	1.378	98.0	3.858	31.5	1 1/4	6.800	14.991	489.80
038 ET-26		26 MM & 1"		45.8	1.807	98.0	3.858	38.0	1.496	110.0	4.331	34.6	1 3/8	9.500	20.944	717.90



Swage Toggle Fork



- ▶ Suitable for use with rotary & fixed die swaging machine
- ▶ Manufactured from high specification 316 stainless steel
- ▶ Use with 1x19, 7 Strand and compacted stand wire rope (IWRC)
- ▶ Unique toggle action for articulation in two planes
- ▶ Minimum hole depth 10x wire diameter
- ▶ Metric and Inch wire ropes

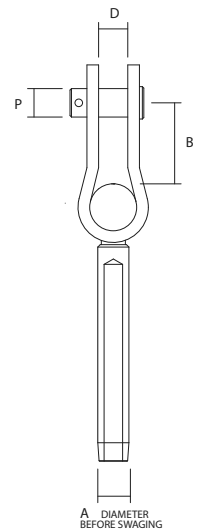

		WIRE SIZE		A		B		D		P		WEIGHT		PRICE
REFERENCE		MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	KG	LB	£
038-03		3 MM & 1/8"		6.2	0.245	14.4	0.567	6.4	0.252	6.4	1/4	0.040	0.088	13.40
038-04		4 MM & 5/32"		7.4	0.292	19.0	0.750	8.4	0.331	7.9	5/16	0.060	0.132	16.00
038-05		5 MM & 3/16"		9.0	0.354	20.0	0.787	9.9	0.390	9.5	3/8	0.100	0.220	17.00
~	132-55	~	7/32	10.7	0.422	25.0	0.984	11.5	0.453	11.1	7/16	0.200	0.441	20.10
038-06	~	6	~	12.4	0.439	25.0	0.984	11.5	0.453	11.1	7/16	0.200	0.441	22.20
~	132-06	~	1/4	12.5	0.494	28.0	1.102	13.1	0.516	12.7	1/2	0.250	0.551	22.20
038-07		7 MM & 9/32"		14.2	0.558	28.0	1.102	13.1	0.516	12.7	1/2	0.280	0.617	28.90
038-08		8 MM & 5/16"		16.1	0.630	28.0	1.102	13.1	0.516	12.7	1/2	0.320	0.705	32.50
038-10	~	10	~	17.7	0.698	33.0	1.299	16.3	0.642	16	5/8	0.560	1.235	58.70
~	132-10	~	3/8	17.7	0.698	33.0	1.299	16.3	0.642	16	5/8	0.560	1.235	58.70
~	132-11	~	7/16	19.6	0.776	34.0	1.339	19.1	0.752	18.5	3/4	1.140	2.513	110.80
038-12	~	12	~	21.3	0.839	34.0	1.339	19.1	0.752	18.5	3/4	1.140	2.513	110.80
~	132-12	~	1/2	21.3	0.839	34.0	1.339	19.1	0.752	18.5	3/4	1.140	2.513	110.80

Metric Only


Inch Only

+44 (0) 1206 390 773 | enquiries@stalok.com

Swage T



- ▶ Suitable for use with rotary & fixed die swaging machine
- ▶ Manufactured from high specification 316 stainless steel
- ▶ Use with 1x19, 7 Strand and compacted stand wire rope (IWRC)
- ▶ Minimum hole depth 10x wire diameter
- ▶ Metric and Inch wire ropes

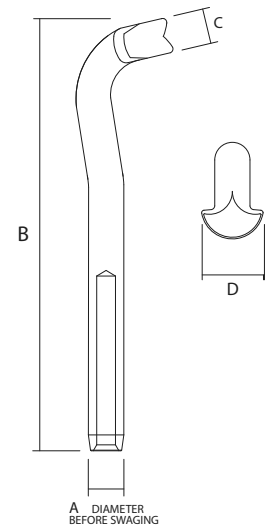

		WIRE SIZE		A		B		C		D		WEIGHT		PRICE
REFERENCE		MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	KG	LB	£
044-03	~	3	~	6.3	0.248	88	3.465	6.3	0.248	15.0	0.591	0.025	0.055	9.30
044-04		4 MM & 5/32"		7.5	0.295	101	3.976	7.5	0.295	17.1	0.675	0.040	0.088	9.80
044-05		5 MM & 3/16"		9.0	0.354	112	4.409	9.0	0.354	19.5	0.769	0.060	0.132	10.80
044-06	~	6	~	12.5	0.492	138	5.433	12.6	0.496	27.7	1.089	0.140	0.309	14.50
~	144-06	~	1/4	12.5	0.492	138	5.433	12.6	0.496	27.7	1.089	0.140	0.309	14.50
044-07		7 MM & 9/32"		14.2	0.559	144	5.669	14.0	0.551	30.0	1.180	0.180	0.397	20.10
044-08		8 MM & 5/16"		16.0	0.630	184	7.244	16.0	0.630	34.4	1.353	0.300	0.661	30.90
044-10	~	10	~	17.8	0.701	208	8.189	17.5	0.689	36.4	1.434	0.420	0.926	64.40
~	144-10	~	3/8	17.8	0.701	208	8.189	17.5	0.689	36.4	1.434	0.420	0.926	64.40

Metric Only


Inch Only

+44 (0) 1206 390 773 | enquiries@stalok.com

Swage Shroud



- ▶ Suitable for use with rotary & fixed die swaging machine
- ▶ Manufactured from high specification 316 stainless steel
- ▶ Use with 1x19, 7 Strand and compacted stand wire rope (IWRC)
- ▶ Fits N840 backing plates
- ▶ Metric and Inch wire ropes
- ▶ Minimum hole depth 10x wire diameter
- ▶ Use with open and closed body turnbuckles

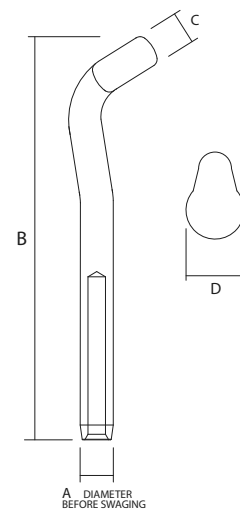


		WIRE SIZE		A		B		C		D		WEIGHT		PRICE
REFERENCE		MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	KG	LB	£
045-04		4 MM & 5/32"		7.4	0.292	16.0	0.629	7.5	0.295	16.0	0.630	0.040	0.088	13.90
045-05		5 MM & 3/16"		9.0	0.354	19.0	0.748	9.1	0.358	19.0	0.748	0.060	0.132	16.00
045-06	~	6	~	12.4	0.488	22.0	0.866	12.5	0.492	22.0	0.866	0.140	0.309	19.10
~	145-06	~	1/4	12.5	0.494	22.0	0.866	12.5	0.492	22.0	0.866	0.140	0.309	19.10
045-07		7 MM & 9/32"		14.2	0.558	28.0	1.102	14.3	0.563	28.0	1.102	0.200	0.441	26.30
045-08		8 MM & 5/16"		16.1	0.630	30.0	1.181	16.0	0.629	30.0	1.181	0.280	0.617	39.20
045-10	~	10	~	17.7	0.698	32.0	1.260	17.8	0.700	32.0	1.260	0.380	0.838	47.40
~	145-10	~	3/8	17.7	0.698	32.0	1.260	17.8	0.700	32.0	1.260	0.380	0.838	47.40
045-12	~	12	~	21.4	0.842	38.0	1.496	21.4	0.842	38.0	1.496	0.660	1.455	87.60
~	145-12	~	1/2	21.3	0.839	38.0	1.496	21.4	0.842	38.0	1.496	0.660	1.455	87.60

Metric Only

Inch Only

+44 (0) 1206 390 773 | enquiries@stalok.com

Swage Stemball



- ▶ Suitable for use with rotary & fixed die swaging machine
- ▶ Manufactured from high specification 316 stainless steel
- ▶ Use with 1x19, 7 Strand and compacted strand wire rope (IWRC)
- ▶ Designed to suit most backing plates - stemball cup may be required
- ▶ Minimum hole depth 10x wire diameter
- ▶ Metric and inch wire ropes

REFERENCE		WIRE SIZE		A		C		WEIGHT		PRICE
		MM	INCH	MM	INCH	MM	INCH	KG	LB	£
042-04		4 MM & 5/32"		7.4	0.292	14.6	0.574	0.020	0.044	6.70
042-05Z		5 MM & 3/16"		9.0	0.354	14.6	0.574	0.040	0.088	7.20
042-05		5 MM & 3/16"		9.0	0.354	18.3	0.720	0.040	0.088	7.30
~	142-55	~	7/32	10.7	0.422	21.2	0.835	0.080	0.176	9.30
042-06	~	6	~	12.4	0.489	21.2	0.835	0.080	0.176	9.30
~	142-06	~	1/4	12.5	0.494	21.2	0.835	0.080	0.176	9.30
042-07		7 MM & 9/32"		14.2	0.558	21.6	0.850	0.120	0.265	19.10
042-07Z		7 MM & 9/32"		14.2	0.558	26.5	1.043	0.130	0.287	16.50
042-08		8 MM & 5/16"		16.1	0.630	26.5	1.043	0.140	0.309	21.20
042-10	~	10	~	17.7	0.698	27.6	1.086	0.240	0.529	30.40
~	142-10	~	3/8	17.7	0.698	27.6	1.086	0.240	0.529	30.40
~	142-11	~	7/16	19.6	0.776	33.1	1.303	0.340	0.750	49.50
042-12E*	~	12	~	20.0	0.787	27.9	1.098	0.310	0.683	53.10
042-12	~	12	~	21.3	0.839	33.1	1.303	0.400	0.882	49.50
~	142-12	~	1/2	21.3	0.839	33.1	1.303	0.400	0.882	49.50
042-14		14 MM & 9/16"		24.9	0.979	31.75	1.250	0.560	1.235	127.70
042-16		16 MM & 5/8"		28.0	1.104	39.4	1.553	0.860	1.896	153.50
042-19		19 MM & 3/4"		34.4	1.354	54.0	2.126	1.920	4.233	321.40

Stemball cups may be required; reference 042C


*Must be swaged with 12E die only

Metric Only

Inch Only

+44 (0) 1206 390 773 | enquiries@stalok.com

Tip Cups

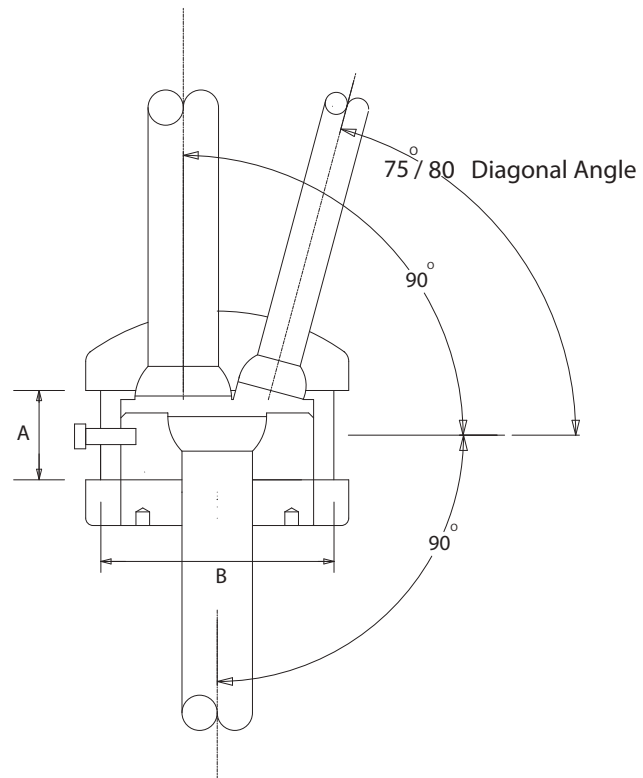

Sta-Lok Terminals now offer an exciting range of Spreader End Tip Cups. This greatly anticipated product is precision engineered from marine grade stainless steel to the highest standard. The three part design works to prevent thread galling increasing both the reliability and longevity of the tip cup.

Each Spreader End Tip Cup is supplied with two Stemball Swages (042) and a Stemball and Swage Forged Bronze Turnbuckle to ensure that all you need is available and easy to order. Standard diagonal angles for Sta-Lok Spreader End Tip Cups are 75°/80° but the product can be custom finished to meet your specifications.

Utilising a fully machined system allows for easy installation and the supplied Stemball heads give perfect wire alignment. To be used with wire rope rigging only.

REFERENCE	Lower	Upper	Diagonal	Diagonal	A		B		PRICE
	Wire Dia (MM)	Wire Dia (MM)	Wire Dia (MM)	Angle	MM	INCH	MM	INCH	£
MTC-141210 75	14	12	10	75	36	1.417	90	3.543	1178.00
MTC-141210 80	14	12	10	80	36	1.417	90	3.543	1178.00
MTC-161410 75	16	14	10	75	36	1.417	90	3.543	1355.00
MTC-161410 80	16	14	10	80	36	1.417	90	3.543	1355.00
MTC-161412 75	16	14	12	75	36	1.417	90	3.543	1743.00
MTC-161412 80	16	14	12	80	36	1.417	90	3.543	1743.00
MTC-161610 75	16	16	10	75	36	1.417	90	3.543	1686.00
MTC-161610 80	16	16	10	80	36	1.417	90	3.543	1686.00
MTC-161612 75	16	16	12	75	36	1.417	90	3.543	1748.00
MTC-161612 80	16	16	12	80	36	1.417	90	3.543	1748.00
MTC-191612 75	19	16	12	75	36	1.417	90	3.543	1910.00
MTC-191612 80	19	16	12	80	36	1.417	90	3.543	1910.00

+44 (0) 1206 390 773 | enquiries@stalok.com

Bronze Turnbuckles

The proven design of the Sta-Lok Forged Turnbuckle exceeds the breaking load of today's high strength compacted strand wire ropes. All are forged from high strength bronze alloy. The aerodynamic design of this turnbuckle provides one of the strongest and most elegant bronze turnbuckles on the world market today. Finished in highly polished chromium.





Toggle & Blank Bronze Turnbuckle - B20

REFERENCE	THREAD	TOGGLE WIDTH		PIN DIA		ADJUSTMENT		PRICE
		MM	INCH	MM	INCH	MM	INCH	£
B20-14	1/4"	6.4	0.252	6.4	1/4	76.0	2.992	23.20
B20-516	5/16"	8.4	0.331	7.9	5/16	83.0	3.268	28.90
B20-38	3/8"	9.9	0.390	9.5	3/8	92.0	3.622	37.10
B20-716	7/16"	11.5	0.453	11.1	7/16	100.0	3.937	44.30
B20-12	1/2"	13.1	0.516	12.7	1/2	104.0	4.094	53.10
B20-58	5/8"	16.3	0.642	16.0	5/8	126.0	4.961	90.20
B20-34	3/4"	19.1	0.750	18.5	3/4	168.0	6.615	219.90



Toggle & Swage Bronze Turnbuckle - B24

REFERENCE	THREAD	WIRE	TOGGLE WIDTH		PIN DIA		ADJUSTMENT		PRICE
		MM	MM	INCH	MM	INCH	MM	INCH	£
B24-03	1/4"	3	6.4	0.252	6.4	1/4	76.0	2.992	28.90
B24-144	1/4"	4	6.4	0.252	6.5	1/4	76.0	2.992	29.40
B24-04	5/16"	4	8.4	0.331	7.9	5/16	83.0	3.268	30.40
B24-5165	5/16"	5	8.4	0.331	7.9	5/16	83.0	3.268	35.10
B24-05	3/8"	5	9.9	0.390	9.5	3/8	92.0	3.622	39.70
B24-386	3/8"	6	9.9	0.390	9.5	3/8	92.0	3.622	43.80
B24-06	7/16"	6	11.5	0.453	11.1	7/16	100.0	3.937	51.00
B24-7167	7/16"	7	11.5	0.453	11.1	7/16	100.0	3.937	58.20
B24-07	1/2"	7	13.1	0.516	12.7	1/2	104.0	4.094	63.40
B24-08	1/2"	8	13.1	0.516	12.7	1/2	104.0	4.094	69.00
B24-588	5/8"	8	16.3	0.642	16.0	5/8	126.0	4.961	108.20
B24-10	5/8"	10	16.3	0.642	16.0	5/8	126.0	4.961	114.90
B24-12	3/4"	12	19.1	0.752	18.5	3/4	168.0	6.615	245.20

split pins supplied

+1 910 297 2826 | usa@stalok.com

Supajust Turnbuckles

Sta-Lok have developed an exciting range of high quality Supajust Turnbuckles. The body of the Turnbuckle is machined from high specification polished solid stainless steel grade 316 with **threaded bronze inserts** permanently sealed in each end.

The result ensures superb adjustment, even **under high load without the risk of seizing or galling**. Supajust Turnbuckles incorporate ingenious design features which give it distinct advantages over other turnbuckles on the market.





Toggle & Blank Supajust Turnbuckle - S20

REFERENCE	THREAD	TOGGLE WIDTH		PIN DIA		ADJUSTMENT		PRICE
		MM	INCH	MM	INCH	MM	INCH	£
S20-12	1/2"	13.1	0.787	12.7	1/2	98.0	3.858	68.00
S20-58	5/16"	16.3	0.984	16	5/8	108.0	4.252	97.40
S20-34	3/4"	19.1	1.102	18.5	3/4	124.0	4.882	195.70



Toggle & Swage Supajust Turnbuckle - S24

REFERENCE	THREAD	TOGGLE WIDTH		PIN DIA		ADJUSTMENT		PRICE
		MM	INCH	MM	INCH	MM	INCH	£
S24-07	1/2"	13.1	0.516	12.7	1/2	98.0	3.858	83.50
S24-08	1/2"	13.1	0.516	12.7	1/2	98.0	3.858	85.50
S24-588	5/8"	16.3	0.642	16.0	5/8	108.0	4.252	120.50
S24-10	5/8"	16.3	0.642	16.0	5/8	108.0	4.252	120.50
S24-12	3/4"	19.1	0.752	18.5	3/4	124.0	4.882	245.20



Eye Toggle & Blank Supajust Turnbuckle - S20 ET

REFERENCE	THREAD	TOGGLE WIDTH		PIN DIA		ADJUSTMENT		PRICE
		MM	INCH	MM	INCH	MM	INCH	£
S20 ET-34	3/4"	20.0	0.787	18.5	3/4	124.0	4.882	195.70
S20 ET-78	7/4"	25.0	0.984	21.5	7/8	144.0	5.669	273.50
S20 ET-100	1"	28.0	1.102	25.0	1	174.0	6.850	489.80
S20 ET-118	1 1/8"	31.5	1.240	28.2	1 1/8	214.0	8.425	800.50
S20 ET-114	1 1/4"	35.0	1.378	31.5	1 1/4	260.0	10.236	1174.70
S20 ET-138	1 3/8"	38.0	1.496	34.6	1 3/8	260.0	10.236	1531.10


split pins supplied

+1 910 297 2826 | usa@stalok.com

Threaded Shroud



- ▶ Manufactured from high specification 316 stainless steel
- ▶ Design to be used with turnbuckle systems
- ▶ Fits N840 backing plates
- ▶ Left hand thread only
- ▶ Supplied with split pin

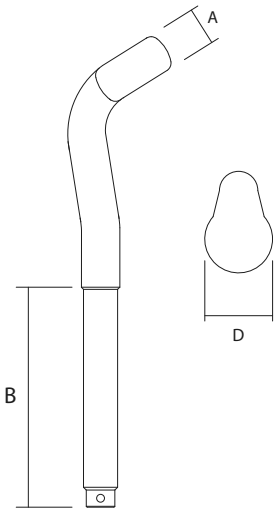


REFERENCE	THREAD	A		B		D		WEIGHT		PRICE
	UNF	MM	INCH	MM	INCH	MM	INCH	KG	LB	£
188-12	1/2	14.4	0.566	90.0	3.625	27.0	1.062	0.220	0.484	69.00
188-858	5/8	16.0	0.628	90.0	3.625	30.0	1.181	0.280	0.616	79.30
188-1058	5/8	17.5	0.689	100.0	4.000	32.0	1.259	0.400	0.880	115.90
188-34	3/4	21.4	0.843	120.0	4.750	38.0	1.496	0.720	1.584	170.00

Threaded T




- ▶ Manufactured from high specification 316 stainless steel
- ▶ Design to be used with turnbuckle systems
- ▶ Universal fitting - works with a broad selection of backing plates
- ▶ Left hand thread only
- ▶ Supplied with split pin

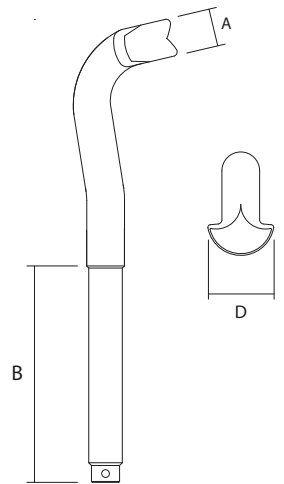

REFERENCE	THREAD	A		B		D		WEIGHT		PRICE
	UNF	MM	INCH	MM	INCH	MM	INCH	KG	LB	£
187-14	1/4	6.2	0.243	48.0	1.889	15.4	0.607	0.020	0.044	26.30
187-516	5/16	8.8	0.345	57.0	2.244	19.2	0.756	0.060	0.132	29.90
187-38	3/8	12.3	0.484	62.0	2.440	27.9	1.098	0.120	0.264	32.50
187-716	7/16	12.3	0.484	67.0	2.638	38.0	1.496	0.140	0.308	35.00
187-12	1/2	13.8	0.542	78.0	3.071	29.4	1.155	0.180	0.396	35.60
187-58	5/8	17.4	0.685	100.0	4.000	36.5	1.437	0.400	0.880	86.00

Shroud Backing Plate

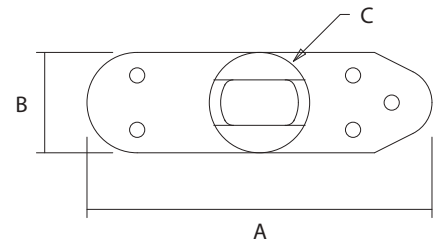


Number and position of Rivet holes may vary

- ▶ Manufactured from high specification 316 stainless steel
- ▶ Design to be used only with shroud terminals

REFERENCE	WIRE SIZE		A		B		C		WEIGHT		PRICE
	MM	INCH	MM	INCH	MM	INCH	MM	INCH	KG	LB	£
BP 145-08	8MM & 5/16"		120.0	4.750	39.4	1.550	39.80	1.567	0.180	0.397	38.10
BP 145-10	10MM & 3/8"		150.0	5.900	43.8	1.720	44.45	1.750	0.320	0.705	54.10
BP 145-12	12MM & 7/16" & 1/2"		177.8	7.000	50.8	2.000	51.56	2.030	0.460	1.014	56.70

T Terminal Backing Plate

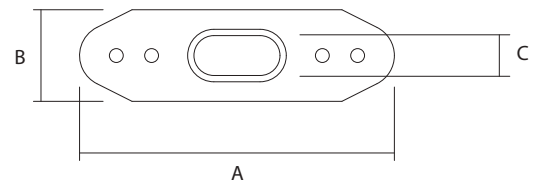


Number and position of Rivet holes may vary


- ▶ Manufactured from high specification 316 stainless steel
- ▶ Design to be used only with T terminals

REFERENCE	WIRE SIZE		A		B		C		WEIGHT		PRICE
	MM	INCH	MM	INCH	MM	INCH	MM	INCH	KG	LB	£
BP 144 6/7	6MM & 7MM & 1/4" & 9/32"		123.0	4.840	40.0	1.570	32.0	1.260	0.100	0.220	16.00
BP 144-10	8MM & 10MM & 5/16" & 3/8"		151.0	5.940	38.0	1.496	41.0	1.614	0.240	0.529	61.80



Threaded Eye

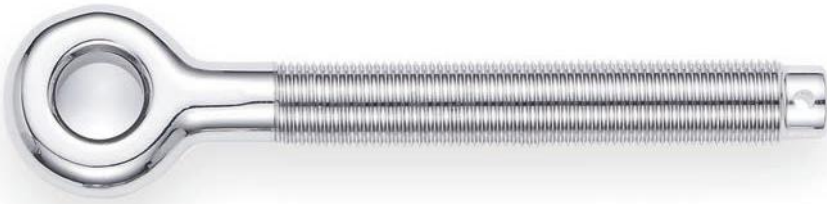

- ▶ Suitable for all Sta-Lok turnbuckles
- ▶ Forged from high specification 316 stainless steel
- ▶ Left hand thread only
- ▶ Supplied with split pin

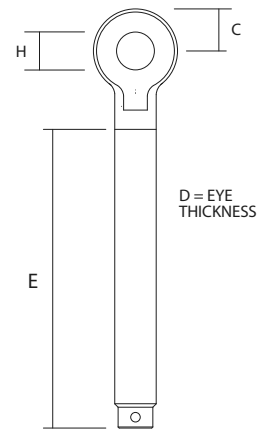

REFERENCE	THREAD	C		D		E		H		WEIGHT		PRICE
	UNF	MM	INCH	MM	INCH	MM	INCH	MM	INCH	KG	LB	£
C770-14	1/4	8.4	0.331	6.0	0.236	47.0	1.850	6.4	1/4	0.014	0.031	8.30
C770-516	5/16	9.5	0.374	6.5	0.256	57.0	2.244	8.0	5/16	0.020	0.044	8.80
C770-38	3/8	11.0	0.433	7.8	0.307	68.0	2.677	9.5	3/8	0.040	0.088	11.40
C770-716	7/16	12.0	0.472	9.3	0.366	75.0	2.953	11.1	7/16	0.080	0.176	14.50
C770-12	1/2	13.5	0.531	11.5	0.453	90.0	3.543	12.7	1/2	0.120	0.264	18.60
C770-58	5/8	18.3	0.720	13.6	0.535	100.0	3.937	16.0	5/8	0.240	0.528	29.40

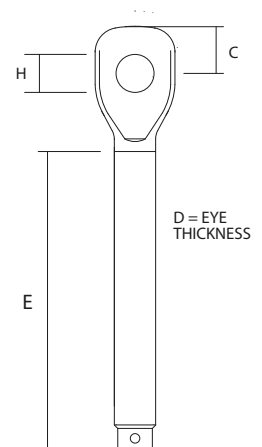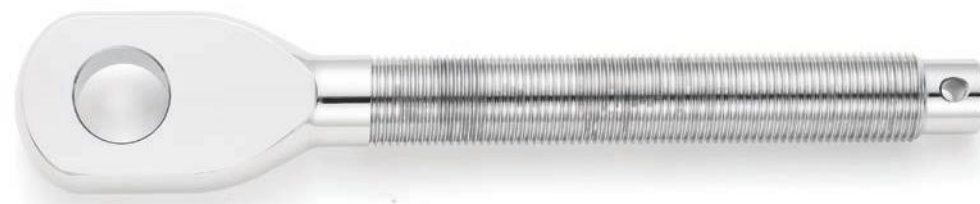

REFERENCE	THREAD	C		D		E		H		WEIGHT		PRICE
	UNF	MM	INCH	MM	INCH	MM	INCH	MM	INCH	KG	LB	£
C770-34*	3/4	22.5	0.886	18.0	0.709	128.0	5.039	19.5	3/4	0.520	1.144	57.20
C770-78*	7/8	25.5	1.004	21.0	0.827	140.0	5.512	22.5	7/8	0.800	1.760	91.70
C770-100*	1	31.9	1.256	24.4	0.961	156.0	6.142	25.4	1	1.180	2.596	123.10
C770-118*	1 1/8	36.5	1.437	27.5	1.083	180.0	7.087	28.6	1 1/8	1.720	3.784	167.40
C770-114*	1 1/4	38.1	1.500	30.5	1.201	215.0	8.465	31.8	1 1/4	2.480	5.456	264.20
C770-138*	1 3/8	42.9	1.689	33.3	1.311	220.0	8.661	35.0	1 3/8	2.930	6.446	302.30

*Machined not forged


Bronze Body



- ▶ Forged from high strength Bronze alloy
- ▶ High specification chromium plating
- ▶ Stronger than the wire rope

REFERENCE	THREAD	A		Adjustment		WEIGHT		PRICE
	UNF	MM	INCH	MM	INCH	KG	LB	£
B19-14	1/4	114.0	4.488	76.0	2.992	0.060	0.132	17.00
B19-516	5/16	123.0	4.843	80.0	3.150	0.080	0.176	19.60
B19-38	3/8	133.0	5.236	92.0	3.622	0.120	0.265	24.80
B19-716	7/16	152.0	5.984	104.0	4.094	0.160	0.353	30.90
B19-12	1/2	163.0	6.417	106.0	4.173	0.220	0.485	33.50
B19-58	5/8	195.0	7.677	126.0	4.961	0.400	0.882	51.50
B19-34	3/4	255.0	10.039	168.0	6.615	0.800	1.764	131.40


Supajust Body

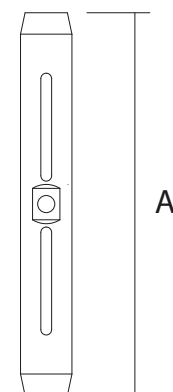

- ▶ High Specification stainless steel open body turnbuckle
- ▶ Threaded Bronze Inserts ensure superb adjustment without seizing or galling
- ▶ Positive locking is achieved with traditional split pins

REFERENCES	THREAD	A		Adjustment		WEIGHT		PRICE
	UNF	MM	INCH	MM	INCH	KG	LB	£
S19-38	3/8	161.0	6.339	77.0	3.032	0.200	0.441	46.90
S19-716	7/16	161.0	6.339	86.0	3.386	0.220	0.485	51.00
S19-12	1/2	182.0	7.165	98.0	3.858	0.320	0.705	58.70
S19-58	5/8	210.0	8.268	108.0	4.252	0.640	1.411	100.50
S19-34	3/4	248.0	9.764	124.0	4.882	0.880	1.940	131.40
S19-78	7/8	280.0	11.024	144.0	5.669	1.100	2.425	206.00
S19-100	1	315.0	12.402	174.0	6.850	1.880	4.145	300.00
S19-118	1 1/8	365.0	14.370	214.0	8.425	3.020	6.658	488.80
S19-114	1 1/4	441.0	17.362	260.0	10.236	4.460	9.833	693.80
S19-138	1 3/8	441.0	17.362	260.0	10.236	5.600	12.346	896.10

Turnbuckle Extension Bar



- ▶ Manufactured from high specification 316 stainless steel
- ▶ Will assemble with standard open and closed body turnbuckles
- ▶ UNF Threads - left hand one end and right hand the other
- ▶ Maximise the adjustment on backstays and cap shrouds by joining two turnbuckles
- ▶ Supplied with split pin

REFERENCE	THREAD	B		WEIGHT		PRICE
	UNF	MM	INCH	KG	LB	£
C280-716	7/16	75.0	2.953	0.140	0.309	51.00
C280-12	1/2	81.0	3.189	0.220	0.485	59.30
C280-58	5/8	100.0	3.937	0.340	0.750	90.20
C280-34	3/4	135.0	5.315	0.640	1.411	118.50
C280-78	7/8	140.0	5.512	0.860	1.896	134.50
C280-100	1	156.0	6.142	1.260	2.778	157.60




Example of use.

Threaded Strap Toggle End



- ▶ Full Articulation in two planes
- ▶ Made from 316 stainless steel
- ▶ Suitable for all Sta-Lok turnbuckles
- ▶ Supplied with split pin

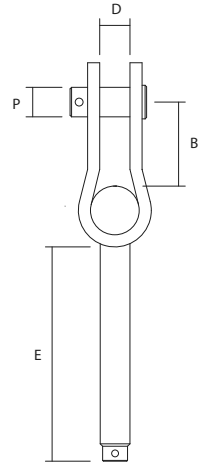


REFERENCE		THREAD	B		D		E		P		WEIGHT		PRICE
Left Hand	Right Hand	UNF	MM	INCH	MM	INCH	MM	INCH	MM	INCH	KG	LB	£
B18-14	B15-14	1/4	14.4	0.567	6.4	0.252	57.0	2.244	6.4	1/4	0.040	0.088	10.80
B18-516	B15-516	5/16	19.0	0.750	8.4	0.331	60.0	2.362	7.9	5/16	0.060	0.132	13.40
B18-38	B15-38	3/8	20.0	0.787	9.9	0.390	70.0	2.756	9.5	3/8	0.100	0.220	15.50
B18-716	B15-716	7/16	25.0	0.984	11.5	0.453	75.0	2.953	11.1	7/16	0.160	0.353	17.50
B18-12	B15-12	1/2	28.0	1.102	13.1	0.516	81.0	3.189	12.7	1/2	0.260	0.573	22.20
B18-58	B15-58	5/8	33.0	1.299	16.3	0.642	89.0	3.504	16.0	5/8	0.480	1.058	38.70
B18-34	B15-34	3/4	34.0	1.339	19.1	0.752	125.0	4.921	18.5	3/4	0.700	1.543	93.20

Threaded Eye Toggle End



- ▶ Elegant design
- ▶ Manufactured from high specification 316 stainless steel
- ▶ Toggle action allows full articulation in two planes
- ▶ Ideal for longer chain plates
- ▶ Stronger than the wire rope
- ▶ Suitable for all Sta-Lok turnbuckles
- ▶ Supplied with split pin

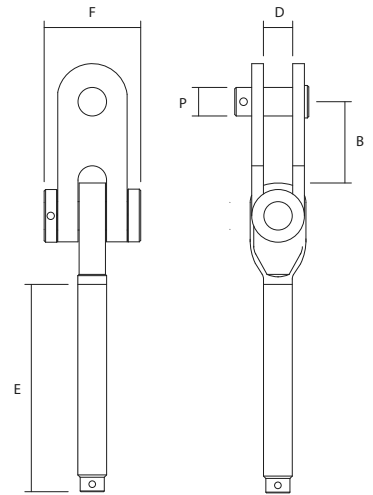


REFERENCE		THREAD	B		D		E		F		P		WEIGHT		PRICE
Left Hand	Right Hand	UNF	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	KG	LB	£
ET18-34	ET15-34	3/4	56.0	2.205	20.0	0.787	128.0	5.039	66.0	2.598	18.5	3/4	1.420	3.131	120.00
ET18-78	ET15-78	7/8	63.0	2.480	25.0	0.984	140.0	5.512	78.0	3.071	21.5	7/8	2.100	4.630	188.50
ET18-100	ET15-100	1	67.5	2.657	28.0	1.102	156.0	6.142	82.0	3.228	25.0	1	2.940	6.482	260.10
ET18-118	ET15-118	1 1/8	70.0	2.756	31.5	1.240	180.0	7.087	89.0	3.504	28.2	1 1/8	4.600	10.141	400.70
ET18-114	ET15-114	1 1/4	79.0	3.110	35.0	1.378	215.0	8.464	98.0	3.858	31.5	1 1/4	6.340	13.977	501.60
ET18-138	ET15-138	1 3/8	98.0	3.858	38.0	1.496	220.0	8.661	110.0	4.331	34.6	1 3/8	9.400	20.723	635.00

Threaded Fork End



- ▶ Elegant design
- ▶ Fully machined from 316 stainless steel
- ▶ Stronger than the wire rope
- ▶ Suitable for all turnbuckles
- ▶ Supplied with split pin

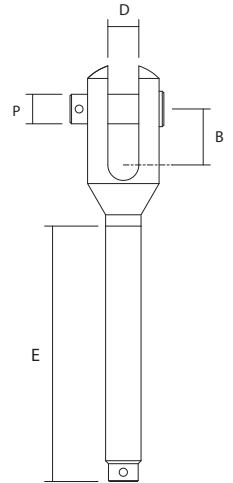


REFERENCE		THREAD	B		D		E		P		WEIGHT		PRICE
Left Hand	Right Hand	UNF	MM	INCH	MM	INCH	MM	INCH	MM	INCH	KG	LB	£
B16-14	B17-14	1/4	10.0	0.394	6.4	0.252	54.0	2.126	6.2	1/4	0.020	0.044	22.20
B16-516	B17-516	5/16	14.7	0.579	7.9	0.311	59.0	2.323	7.7	5/16	0.060	0.132	23.70
B16-38	B17-38	3/8	17.5	0.689	9.5	0.374	67.0	2.638	9.3	3/8	0.120	0.265	28.90
B16-716	B17-716	7/16	22.2	0.874	11.1	0.437	76.0	2.992	10.9	7/16	0.180	0.397	33.50
B16-12	B17-12	1/2	27.4	1.080	12.7	0.500	83.0	3.268	12.6	1/2	0.300	0.661	42.80
B16-58	B17-58	5/8	29.4	1.157	15.9	0.625	95.0	3.750	15.6	5/8	0.500	1.102	97.90
B16-34	B17-34	3/4	33.3	1.313	19.1	0.752	124.0	4.875	18.5	3/4	0.860	1.896	169.50
B16-78	B17-78	7/8	38.1	1.500	22.2	0.874	148.0	5.813	21.5	7/8	1.200	2.646	181.80
B16-100	B17-100	1	40.0	1.575	25.4	1.000	162.0	6.375	25.0	1	1.700	3.748	298.70
B16-118	B17-118	1 1/8	50.0	1.970	28.6	1.125	190.0	7.480	28.2	1 1/8	2.400	5.291	408.40
B16-114	B17-114	1 1/4	60.0	2.362	31.8	1.252	224.0	8.812	31.5	1 1/4	3.660	8.069	571.20
B16-138	B17-138	1 3/8	70.0	2.756	35.0	1.378	232.0	9.134	34.6	1 3/8	4.200	9.259	737.50

Threaded Stemball




- ▶ Suitable for all Sta-Lok turnbuckles
- ▶ Manufactured from high specification 316 stainless steel
- ▶ If stemball cups are required please use ref: 042C
- ▶ Left hand thread only
- ▶ Supplied with split pin



REFERENCE	THREAD	C		E		WEIGHT		PRICE
	UNF	MM	INCH	MM	INCH	KG	LB	£
186-14	1/4	14.6	0.575	57.0	2.244	0.020	0.044	8.30
186-516	5/16	18.0	0.709	63.0	2.480	0.040	0.088	9.80
186-516Z	5/16	13.2	0.520	63.0	2.480	0.040	0.088	9.80
186-38	3/8	20.3	0.799	69.0	2.717	0.060	0.132	12.90
186-716	7/16	20.3	0.799	75.0	2.953	0.100	0.220	16.00
186-12	1/2	26.0	1.024	80.0	3.150	0.140	0.308	20.60
186-58	5/8	27.0	1.063	98.0	3.858	0.220	0.484	34.00
186-34	3/4	28.0	1.102	128.0	5.039	0.380	0.836	52.10
186-78	7/8	34.0	1.339	140.0	5.512	0.640	1.408	82.40
186-100	1	39.5	1.556	156.0	6.141	0.980	2.156	100.90
186-118	1 1/8	54.8	2.156	182.0	7.165	1.540	3.388	216.30



Double Jaw Toggle

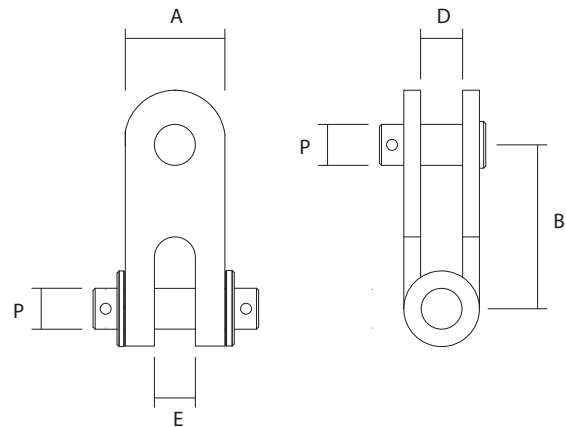

► Manufactured from high specification 316 stainless steel

REFERENCE	A		B		D		E		P		WEIGHT		PRICE
	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	KG	LB	£
DJT-14	16.0	0.630	20.0	0.787	7.6	0.299	6.7	0.264	6.4	1/4	0.020	0.044	18.60
DJT-516	19.0	0.748	25.0	0.984	9.2	0.362	8.3	0.327	7.9	5/16	0.060	0.132	19.60
DJT-38	22.2	0.875	28.0	1.102	10.8	0.425	9.9	0.390	9.5	3/8	0.080	0.176	19.60
DJT-716	28.6	1.126	32.0	1.260	12.3	0.484	11.5	0.453	11.1	7/16	0.120	0.264	26.60
DJT-12	32.0	1.260	34.0	1.339	13.0	0.512	13.0	0.512	12.7	1/2	0.180	0.396	30.90
DJT-58	38.1	1.500	43.0	1.693	18.0	0.709	16.3	0.642	16.0	5/8	0.360	0.792	44.80
DJT-34	48.0	1.890	81.0	3.189	20.0	0.790	19.5	0.768	18.5	3/4	0.900	1.980	122.60
DJT-78	60.0	2.362	92.0	3.622	25.0	1.000	23.0	0.906	21.5	7/8	1.420	3.124	184.90
DJT-100	64.0	2.520	99.0	3.898	28.0	1.130	26.0	1.024	25.0	1	1.860	4.092	246.70
DJT-118	70.0	2.756	105.0	4.134	31.5	1.250	29.0	1.142	28.2	1 1/8	2.850	6.270	394.00
DJT-114	80.0	3.150	119.0	4.685	35.0	1.375	34.0	1.339	31.5	1 1/4	4.020	8.844	565.30
DJT-138	90.0	3.543	140.0	5.512	38.0	1.500	35.0	1.378	34.6	1 3/8	5.430	11.946	682.30

Eye & Jaw Bar Toggle

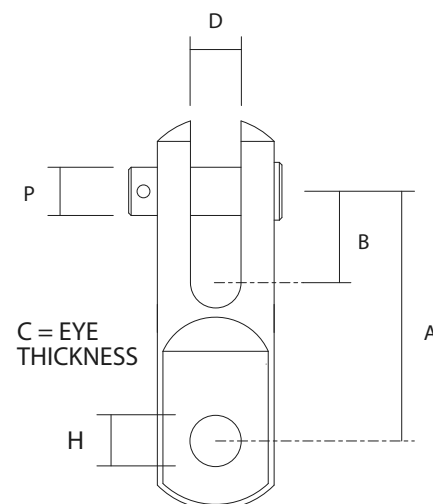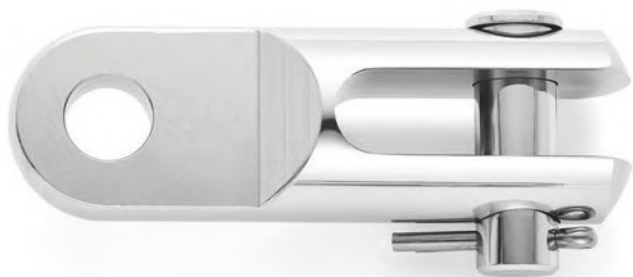

- ▶ Manufactured from high specification 316 stainless steel
- ▶ Specially designed to mate with turnbuckle forks to provide full articulation
- ▶ Recommended that a bar toggle be used with all turnbuckle forks

REFERENCE	A		B		D		H		P		WEIGHT		PRICE
	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	KG	LB	£
S-14BT	29.1	1.146	13.2	0.520	6.4	0.252	6.4	1/4	6.2	1/4	0.020	0.044	15.00
S-516BT	38.6	1.520	14.7	0.580	7.9	0.311	7.9	5/16	7.7	5/16	0.060	0.132	16.00
S-38BT	49.1	1.933	17.5	0.687	9.5	0.375	10.0	3/8	9.3	3/8	0.080	0.176	20.10
S-716BT	60.4	2.378	21.9	0.861	11.1	0.437	11.4	7/16	10.9	7/16	0.120	0.265	29.90
S-12BT	74.1	2.917	27.4	1.080	12.7	0.500	13.0	1/2	12.6	1/2	0.180	0.397	52.10
S-58BT	81.6	3.213	29.2	1.150	15.9	0.626	16.0	5/8	15.6	5/8	0.360	0.794	65.90
S-34BT	92.2	3.630	33.3	1.311	19.1	0.752	19.1	3/4	18.5	3/4	0.900	1.984	156.60
S-78BT	110.6	4.354	38.1	1.500	22.2	0.874	22.2	7/8	21.5	7/8	1.420	3.131	168.90
S-100BT	121.3	4.776	40.0	1.576	25.4	1.000	25.4	1	25.0	1	1.860	4.101	226.10
S-118BT	148.4	5.843	50.0	1.970	28.6	1.125	28.6	1 1/8	28.2	1 1/8	2.850	6.283	372.40
S-114BT	174.6	6.875	60.0	2.362	32.0	1.260	31.8	1 1/4	31.5	1 1/4	4.020	8.863	466.10
S-138BT	185.0	7.282	70.0	2.756	35.0	1.378	35.0	1 3/8	34.6	1 3/8	5.430	11.971	569.60

Stainless Steel Turnbuckles Fork & Blank



- ▶ Manufactured from polished stainless steel seamless tube
- ▶ Machined fork
- ▶ Designed to fit most chain plates and fixing points
- ▶ Supplied with Right Hand nut

REFERENCE	THREAD	FORK WIDTH		PIN DIA		ADJUSTMENT		WEIGHT		PRICE
	UNF	MM	INCH	MM	INCH	MM	INCH	KG	LB	£
ST30-14	1/4	6.4	0.252	6.2	1/4	62.0	2.441	0.070	0.154	27.30
ST30-516	5/16	7.9	0.311	7.7	5/16	68.0	2.677	0.130	0.287	29.90
ST30-38	3/8	9.5	0.374	9.3	3/8	80.0	3.150	0.210	0.463	36.10

Stainless Steel Turnbuckles Toggle & Blank



- ▶ Manufactured from polished stainless steel seamless tube
- ▶ Swivel toggle action allows full articulation in two planes
- ▶ Designed to fit most chain plates and fixing points
- ▶ Supplied with Right Hand nut

REFERENCE	THREAD	TOGGLE WIDTH		PIN DIA		ADJUSTMENT		WEIGHT		PRICE
	UNF	MM	INCH	MM	INCH	MM	INCH	KG	LB	£
ST20-14	1/4	7.6	0.299	6.4	1/4	62.0	2.441	0.108	0.238	19.60
ST20-516	5/16	9.2	0.362	7.9	5/16	68.0	2.677	0.120	0.265	24.20
ST20-38	3/8	10.8	0.425	9.5	3/8	80.0	3.150	0.220	0.485	26.80

Stainless Steel Turnbuckles Toggle & Swage




- ▶ Manufactured from polished stainless steel seamless tube
- ▶ Swivel toggle action allows full articulation in two planes
- ▶ Designed to fit most chain plates and fixing points
- ▶ Supplied with Right Hand nut

REFERENCE	THREAD	TOGGLE WIDTH		PIN DIA		ADJUSTMENT		WEIGHT		PRICE
	UNF	MM	INCH	MM	INCH	MM	INCH	KG	LB	£
ST24-03	1/4	7.6	0.299	6.4	1/4	62.0	2.441	0.100	0.220	24.20
ST24-144	1/4	7.6	0.299	6.4	1/4	62.0	2.441	0.100	0.220	25.30
ST24-04	5/16	9.2	0.362	7.9	5/16	68.0	2.677	0.160	0.353	29.90
ST24-5165	5/16	9.2	0.362	7.9	5/16	68.0	2.677	0.160	0.353	32.50
ST24-05	3/8	10.8	0.425	9.5	3/8	80.0	3.150	0.260	0.573	35.10
ST24-386	3/8	10.8	0.425	9.5	3/8	80.0	3.150	0.300	0.661	39.20

Guard Rail Adjusters Fork & Swage



- ▶ Marine grade stainless steel fittings.
- ▶ Provides weight and length reduction on conventional turnbuckles
- ▶ Swivel action - adjust one end only
- ▶ Adjustment +/- 16mm (5/8")



REFERENCE	Wire (mm)	D		P		WEIGHT		PRICE
		MM	INCH	MM	INCH	KG	LB	£
G28-04	4	11.1	0.437	7.7	5/16	0.110	0.243	21.70
G28-05	5	11.1	0.437	7.7	5/16	0.120	0.265	26.30

Guard Rail Adjusters Fork & Sta-Lok



- ▶ Marine grade stainless steel fittings.
- ▶ Provides weight and length reduction on conventional turnbuckles
- ▶ Swivel action - adjust one end only
- ▶ Adjustment +/- 16mm (5/8")




REFERENCE	Wire (mm)	D		P		WEIGHT		PRICE
		MM	INCH	MM	INCH	KG	LB	£
G26-04	4	11.1	0.437	7.7	5/16	0.110	0.243	39.20
G26-05	5	11.1	0.437	7.7	5/16	0.120	0.265	43.30

Swage Guard Rail Fork



- ▶ For use with guard rails
- ▶ Manufactured as a two part weld free assembly

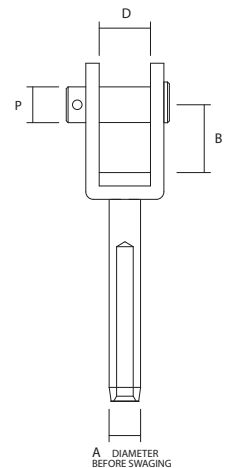


REFERENCE	WIRE SIZE		A		B		D		P		WEIGHT		PRICE
	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	KG	LB	
G035-04	4MM & 5/32"		7.4	0.292	15.0	0.591	11.1	0.433	7.7	5/16	0.044	0.097	11.40
G035-05	5MM & 3/16"		9.0	0.354	15.0	0.591	11.1	0.433	7.7	5/16	0.052	0.115	12.40

Swage Welded Fork



- ▶ For use with guard rails

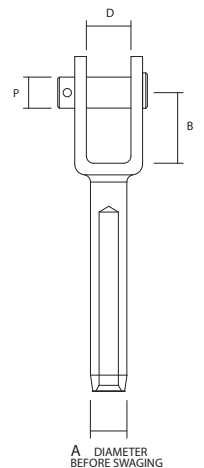

REFERENCE	WIRE SIZE		A		B		D		P		WEIGHT		PRICE
	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	KG	LB	
WSF-03	3mm & 1/8"		6.3	0.246	12.0	0.468	8.0	0.312	6.0	1/4	0.020	0.044	10.90
WSF-04	4MM & 5/32"		7.5	0.293	15.0	0.585	11.0	0.429	8.0	5/16	0.040	0.088	13.90
WSF-05	5MM & 3/16"		9	0.351	17.5	0.683	12.0	0.468	9.0	3/8	0.80	1.764	15.00
WSF-06	6	~	12.5	0.488	27.2	1.061	14.5	0.566	12.0	1/2	0.140	0.309	23.20

Metric Only

Inch Only

+44 (0) 1206 390 773 | enquiries@stalok.com

Pelican Hook with Swage Stud



- ▶ Designed specifically for guard rails
- ▶ Supplied with right hand nut
- ▶ Manufactured from Stainless Steel Grade 316
- ▶ METRIC wire only

REFERENCE	Wire (mm)	THREAD		WEIGHT		PRICE £
		UNF	METRIC	KG	LB	
PH-0514 516	4	5/16	-	0.180	0.397	23.20
PH-0514 M8	4	-	M8	0.180	0.397	23.20
PH-0515 516	5	5/16	-	0.180	0.397	23.20
PH-0515 M8	5	-	M8	0.180	0.397	23.20


Pelican Hook



- ▶ Designed specifically for guard rails
- ▶ Manufactured from Stainless Steel Grade 316
- ▶ UNF & Metric right hand threads
- ▶ Nut not supplied

REFERENCE	Wire (mm)	THREAD		WEIGHT		PRICE £
		UNF	METRIC	KG	LB	
PH-516	4 - 5	5/16	-	0.140	0.309	18.10
PH-M8	4 - 5	-	M8	0.140	0.309	18.10


Guard Rail Single Eye

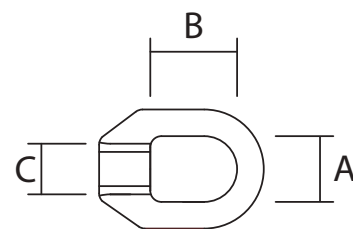

- ▶ Marine grade stainless steel.
- ▶ Available with UNF & metric right hand threads

REFERENCE	C		A		B		WEIGHT		PRICE
	THREAD		MM	INCH	MM	INCH	KG	LB	£
GE1 - 516	5/16		16	0.625	19.4	0.764	0.02	0.044	8.30
GE1 - M8	M8		16	0.625	19.4	0.764	0.02	0.044	8.30



Guard Rail Interlocking Eye

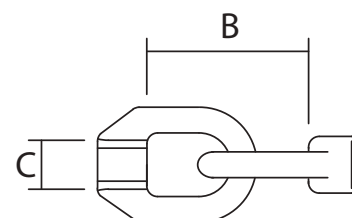

- ▶ Marine grade stainless steel.
- ▶ Available with UNF & metric right hand threads

REFERENCE	C		B		WEIGHT		PRICE
	THREAD		MM	INCH	KG	LB	£
GE2 - 516	5/16		38.8	1.528	0.04	0.088	16.50
GE2 - M8	M8		38.8	1.528	0.04	0.088	16.50

Short Swage Stud



REFERENCE	WIRE SIZE		THREAD	A		B		WEIGHT		PRICE
	MM	INCH		MM	INCH	MM	INCH	KG	LB	£
051-04-SH	4mm & 5/32"		5/16	7.4	0.292	11.1	0.437	0.02	0.044	4.16
051-04M8-SH	4mm & 5/32"		M8	7.4	0.292	11.1	0.437	0.02	0.044	4.16
051-05-SH	5mm & 3/16"		5/16	9.0	0.354	11.1	0.437	0.03	0.066	7.27
051-05M8-SH	5mm & 3/16"		M8	9.0	0.354	11.1	0.437	0.03	0.066	7.27
051-06-SH	6	-	5/16	12.4	0.489	11.1	0.437	0.05	0.110	8.25
051-06M8-SH	6	-	M8	12.4	0.489	11.1	0.437	0.05	0.110	8.25

Metric Only

Inch Only

+44 (0) 1206 390 773 | enquiries@stalok.com

Split Pins




REFERENCE	DIA	LENGTH		PACKAGE QUANTITY	WEIGHT (Per Pack)		PRICE £ PER PACK
		MM	INCH		KG	LB	
779-00 PKT-10	1.5 X 12	12	0.468	10	0.010	0.022	0.98
779-01 PKT-10	2.3 X 12	12	0.468	10	0.010	0.022	1.08
779-02 PKT-10	2.3 X 16	16	0.624	10	0.010	0.022	1.09
779-03 PKT-10	2.3 X 19	19	0.741	10	0.020	0.044	1.13
779-04 PKT-10	3 X 19	19	0.741	10	0.020	0.044	1.29
779-05 PKT-10	3 X 24	24	0.938	10	0.080	0.132	2.13
779-06 PKT-10	5 X 40	40	1.56	10	0.070	0.154	4.20
779-07 PKT-10	5 X 52	52	2.028	10	0.080	0.176	5.80

Split Rings



REFERENCE	DIA		PACKAGE QUANTITY	WEIGHT (Per Pack)		PRICE £ PER PACK
	MM	INCH		KG	LB	
C775-01 PKT-10	16	0.630	10	0.010	0.022	2.06
C775-02 PKT-10	24	0.945	10	0.020	0.044	2.88

Hexagonal Lock Nut




► Manufactured from Stainless Steel

REFERENCE		THREAD	A		B		WEIGHT		PRICE
Left Hand	Right Hand	METRIC	MM	INCH	MM	INCH	KG	LB	£
HN-M6 L	HN-M6 R	M6	8.0	0.315	4.0	0.157	0.001	0.002	POA
HN-M8 L	HN-M8 R	M8	10.0	0.394	5.0	0.197	0.001	0.002	POA
HN-M10 L	HN-M10 R	M10	13.0	0.512	7.0	0.276	0.001	0.002	POA
HN-M12 L	HN-M12 R	M12	17.0	0.669	8.0	0.315	0.009	0.020	POA
HN-M16 L	HN-M16 R	M16	22.0	0.866	11.0	0.433	0.020	0.044	POA
HN-M20 L	HN-M20 R	M20	24.0	0.945	13.0	0.512	0.020	0.044	POA
HN-M22 L	HN-M22 R	M22	30.0	1.181	17.0	0.669	0.040	0.088	POA
HN-M24 L	HN-M24 R	M24	36.0	1.417	18.0	0.799	0.088	0.194	POA

REFERENCE		THREAD	A		B		WEIGHT		PRICE
Left Hand	Right Hand	UNF	MM	INCH	MM	INCH	KG	LB	£
HN-14 L	HN-14 R	1/4	8.0	0.315	4.0	0.157	0.001	0.002	POA
HN-516 L	HN-516 R	5/16	10.0	0.394	5.0	0.197	0.001	0.002	POA
HN-38 L	HN-38 R	3/8	13.0	0.512	6.5	0.256	0.001	0.002	POA
HN-716 L	HN-716 R	7/16	14.0	0.551	8.4	0.331	0.009	0.020	POA
HN-12 L	HN-12 R	1/2	17.0	0.669	8.0	0.315	0.010	0.022	POA
HN-58 L	HN-58 R	5/8	22.0	0.866	11.0	0.433	0.020	0.044	POA
HN-34 L	HN-34 R	3/4	24.0	0.945	13.0	0.512	0.020	0.044	POA
HN-78 L	HN-78 R	7/8	30.0	1.181	16.5	0.650	0.040	0.088	POA
HN-100 L	HN-100 R	1	36.0	1.417	17.5	0.689	0.088	0.194	POA

Sta-lok Fork Pin

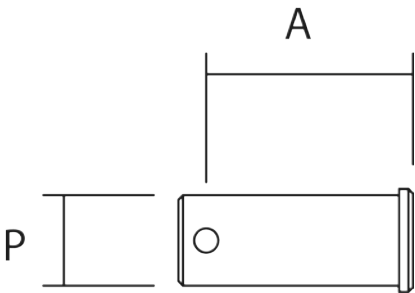

► Replacement pin for Sta-Lok Fork reference 034


REFERENCE	A		P		PACKAGE	WEIGHT (Per Pack)		PRICE £
	MM	INCH	MM	INCH	QUANTITY	KG	LB	PER PACK
037-03	15.5	0.610	5.0	3/16	5	0.100	0.220	20.10
037-04	17.5	0.689	6.4	1/4	5	0.200	0.441	20.10
037-05	20.6	0.811	8.0	5/16	5	0.300	0.661	25.80
037-06	27.0	1.063	10.9	7/16	5	0.600	1.323	37.10
037-07	27.0	1.063	10.9	7/16	5	0.600	1.323	37.10
037-08	34.1	1.343	12.6	1/2	2	0.128	0.282	16.50
037-10	37.3	1.469	15.6	5/8	2	0.280	0.617	20.10
037-12	47.6	1.874	18.5	3/4	1	0.120	0.265	19.60
037-14	50.8	2.000	21.5	7/8	1	0.160	0.353	51.00
037-16	54.0	2.126	21.5	7/8	1	0.180	0.397	34.00
037-19	66.7	2.626	27.0	1 1/16	1	0.392	0.864	69.10
037-22	80.1	3.187	31.5	1 1/4	1	0.680	1.500	87.60
037-26	96.0	3.781	34.6	1 3/8	1	0.890	1.962	99.40

Strap Toggle Pin

► Replacement pin for Strap Toggles

REFERENCE	A		P		PACKAGE	WEIGHT (Per Pack)		PRICE £
	MM	INCH	MM	INCH	QUANTITY	KG	LB	PER PACK
057-03	12.7	0.500	6.4	1/4	5	0.125	0.276	17.00
057-04	15.5	0.610	7.9	5/16	5	0.225	0.496	15.00
057-05	17.5	0.689	9.5	3/8	5	0.400	0.882	16.00
057-06	20.2	0.795	11.1	7/16	5	0.550	1.213	20.60
057-08	23.8	0.937	12.7	1/2	2	0.128	0.282	8.30
057-10	31.0	1.220	16.0	5/8	2	0.240	0.529	11.40
057-12	38.1	1.500	18.5	3/4	1	0.101	0.223	9.30
057-14	42.0	1.654	21.5	7/8	1	0.160	0.353	12.90


Turnbuckle Fork Pin

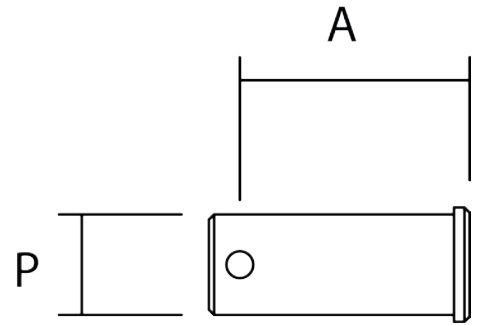

- ▶ Replacement pin for Turnbuckle Fork, Ref: B16 and B17
- ▶ For UNF Thread turnbuckles only

REFERENCE	TURNBUCKLE	A		P		PACKAGE	WEIGHT (Per Pack)		PRICE £
	UNF	MM	INCH	MM	INCH	QUANTITY	KG	LB	PER PACK
047-03	1/4	14.5	0.571	6.2	1/4	5	0.020	0.044	17.00
047-04	5/16	19.0	0.748	7.7	5/16	5	0.040	0.088	15.00
047-05	3/8	23.8	0.937	9.3	3/8	5	0.085	0.187	24.80
047-06	7/16	27.0	1.063	10.9	7/16	5	0.140	0.309	29.40
047-08	1/2	34.1	1.343	12.6	1/2	2	0.080	0.176	10.90
047-10	5/8	40.5	1.594	15.6	5/8	2	0.140	0.309	13.90
047-12	3/4	47.6	1.874	18.5	3/4	1	0.120	0.265	19.10
047-14	7/8	54.0	2.126	21.5	7/8	1	0.180	0.397	23.20
047-16	1	60.3	2.374	25.0	1	1	0.280	0.617	34.00
047-19	1 1/8	69.8	2.748	28.2	1 1/8	1	0.392	0.864	69.00
047-22	1 1/4	74.6	2.937	31.5	1 1/4	1	0.680	1.500	87.60
047-26	1 3/8	87.3	3.437	34.6	1 3/8	1	0.890	1.962	99.40

Stainless Steel Thimble

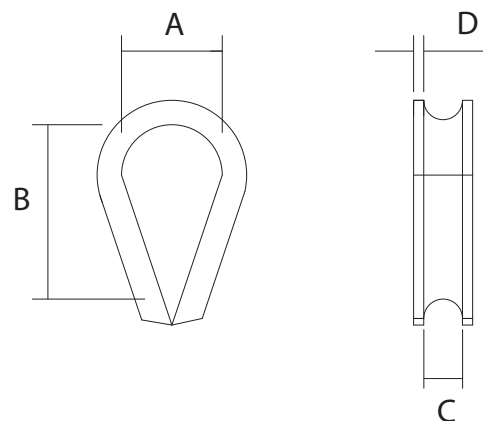

- ▶ Suitable for forming hard eyes in wire ropes
- ▶ Thimbles reinforce and support looped wire rope eyes and create a lasting surface

REFERENCE	Wire (mm)	A		B		C		D		WEIGHT		PRICE £
		MM	INCH	MM	INCH	MM	INCH	MM	INCH	KG	LB	
T-02	2	10.3	0.406	22.0	0.866	2.3	0.091	0.8	0.033	0.003	0.007	0.44
T-03	3	12.8	0.504	25.0	0.984	3.2	0.134	1.0	0.039	0.003	0.007	0.48
T-03S	3	10.4	0.409	18.0	0.709	3.6	0.142	1.0	0.039	0.003	0.007	0.48
T-04	4	13.6	0.535	28.5	1.122	4.3	0.169	1.0	0.039	0.007	0.015	0.70
T-05	5	16.3	0.642	32.0	1.260	5.8	0.228	1.0	0.039	0.007	0.015	0.75
T-05S	5	13.4	0.528	24.0	0.945	5.8	0.228	1.0	0.039	0.006	0.013	0.75
T-06	6	17.3	0.681	33.0	1.299	6.4	0.252	1.3	0.051	0.014	0.031	1.00
T-07	7	19.3	0.760	36.0	1.417	8.4	0.331	1.5	0.059	0.014	0.031	2.10
T-08	8	22.7	0.894	41.0	1.614	8.6	0.339	1.5	0.059	0.022	0.049	2.40
T-10	10	26.0	1.024	46.0	1.811	12.0	0.472	1.5	0.059	0.028	0.062	2.90
T-12	12	29.6	1.165	55.0	2.165	14.5	0.571	2.6	0.102	0.040	0.088	3.90

Copper Ferrules (British Standard)



- ▶ Copper Ferrule for crimping wire rope
- ▶ Suitable for forming eyes and stops in wire rope
- ▶ Swaging press or crimping tool required

REFERENCE	Wire (mm)	WIRE ROPE LIMITS		WEIGHT		PRICE
		WIRE CORE (mm)	FIBRE CORE (mm)	KG	LB	£
BF-CU 01.5	1	0.95 - 1.05	1.45 - 1.60	0.002	0.004	0.20
BF-CU 02	1.5	1.45 - 1.60	1.90 - 2.15	0.002	0.004	0.30
BF-CU 02.5	2	1.95 - 2.15	2.40 - 2.65	0.002	0.004	0.38
BF-CU 03	2.5	2.40 - 2.65	2.90 - 3.20	0.004	0.009	0.57
BF-CU 03.5	3	2.90 - 3.20	3.40 - 3.70	0.006	0.013	0.70
BF-CU 04	3.5	3.40 - 3.70	3.90 - 4.30	0.010	0.022	0.98
BF-CU 04.5	4	3.90 - 4.30	4.40 - 4.80	0.014	0.031	1.25
BF-CU 05	5	4.60 - 5.40	4.90 - 5.40	0.016	0.035	1.45
BF-CU 06	6	6.30	5.85	0.024	0.053	1.63
BF-CU 08	8	8.50	7.85	0.068	0.150	4.65

Copper Ferrules (Din Standard 3093)

REFERENCE	Wire (mm)	WIRE ROPE LIMITS		WEIGHT		PRICE
		WIRE CORE (mm)	FIBRE CORE (mm)	KG	LB	£
F-CU 01.5	1	1.1 - 1.4	1.2 - 1.6	0.001	0.002	0.18
F-CU 02	1.5	1.5 - 1.9	1.7 - 2.1	0.002	0.004	0.20
F-CU 02.5	2	2.0 - 2.4	2.2 - 2.6	0.002	0.004	0.22
F-CU 03	2.5	2.5 - 2.9	2.7 - 3.2	0.002	0.004	0.31
F-CU 03.5	3	3.0 - 3.4	3.3 - 3.7	0.004	0.009	0.43
F-CU 04	3.5	3.5 - 3.8	3.8 - 4.2	0.006	0.013	0.57
F-CU 04.5	4	3.9 - 4.3	4.3 - 4.7	0.010	0.022	0.84
F-CU 05	4.5	4.4 - 4.8	4.8 - 5.3	0.012	0.026	1.00
F-CU 06	5	4.9 - 5.8	5.4 - 6.3	0.020	0.044	1.63
F-CU 06.5	6	5.9 - 6.2	6.4 - 6.8	0.026	0.057	1.83
F-CU 07	6.5	6.3 - 6.7	6.9 - 7.4	0.034	0.075	2.40
F-CU 08	7	6.8 - 7.7	7.5 - 8.4	0.044	0.097	3.24
F-CU 09	8	7.8 - 8.6	8.5 - 9.5	0.064	0.141	4.71
F-CU 10	9	8.7 - 9.6	9.6 - 10.5	0.092	0.203	5.93
F-CU 11	10	9.7 - 10.5	10.6 - 11.6	0.116	0.256	8.10
F-CU 12	11	10.6 - 11.5	11.7 - 12.6	0.160	0.353	10.28

STA-LOK TERMINAL LTD
STANDARD TERMS AND CONDITIONS OF SALE

1. Definitions

In these Terms & Conditions, unless the context otherwise requires:

"The Company" means Sta-Lok Terminals Ltd of The Forge, Mistley Heath, Manningtree, Essex CO11 2QH.

"The Customer" means the person, firm or company to whom the Company supplies Goods under the Contract.

"The Contract" means the contract entered into between the Company and the Customer in relation to the Goods supplied, and

"The Goods" means the goods which the company is to supply to the Customer under the Contract.

2. General

2.1 The Company supplies the Goods on these Terms & Conditions only. Accordingly these Terms and Conditions shall apply to all orders for the Goods which are received from the Customer and (save as shall have been expressly agreed in writing by a director of the Company) shall prevail over any conditions of contract which the Customer may seek to impose. No variation of, or addition to, these Terms & Conditions and no representations about the Goods will be binding on the Company unless made in writing and signed by a director of the Company.

2.2 Any reference in these Terms & Conditions to any provision of an Act of Parliament or statutory instrument shall be construed as a reference to that provision as amended, re-enacted or extended from time to time.

2.3 The headings in these Terms & Conditions are set out for convenience only and shall have no effect on the interpretation of the individual clauses.

3. The Scope of the Contract

3.1 The Contract does not become binding upon the Company until the Company has issued a written acceptance of the Customer's order.

3.2 The Company's obligations under the Contract shall be limited to supplying the Goods contemplated by the Customer's order together with any variations thereof and additions thereto, which may subsequently be agreed. The Customer must give the Company reasonable notice of any variations and additions that are required.

4. Price

4.1 Subject as hereinafter provided, the price payable by the Customer for the Goods shall reflect the Company's price list from time to time in force in relation to the Customer except where the Company has issued a written quotation to the Customer, in which case the price or prices referred to in that quotation shall prevail,

4.2 The Company does however reserve the right to increase the price payable in order to reflect any agreed variations or additions to the Customer's requirements and any increases in production costs, which may be incurred by the Company between the date of the Customer's order and the date of despatch. In no circumstances shall any increase in the Contract price entitle the Customer to cancel its order or to repudiate the Contract but the Customer shall be entitled to receive notification of any such increases as soon as possible after their occurrence.

4.3 Unless expressly included in any quote given to the Customer, the Company shall be entitled to recover from the Customer as an additional item at cost all transportation, insurance, storage and other associated costs and charges which are incurred by the Company in delivering the Goods in accordance with the Customer's order, including any additional costs and charges which may be incurred by the Company in the event of the Customer for any reason failing or being unable to accept delivery of the Goods when tendered or causing despatch or delivery to be withheld through the non-payment of any sum due to the Company.

4.4 Unless otherwise indicated, all prices listed or quoted are exclusive of any applicable Value Added or other relevant sales taxes, which the Company reserves the right to levy at the prevailing rate on all amounts actually charged to the Customer.

5. Payment

5.1 Payment of sums due under the Contract shall be made by the Customer nett within 30 days of invoice, unless the Company has requested alternative terms of payment in which case payment should be made on the terms then requested. The Company shall be entitled to invoice the Customer for each consignment despatched at any time on or after the date of despatch.

5.2 In the event that payment is not made by the due date, the Company shall be entitled to charge the Customer interest on any overdue amounts at the rate of 2% per month (or at such other rate as maybe advised by the Company from time to time) for each month or part month during which the said amounts are to remain overdue (both before and after any judgement).

5.3 Payment on or before the due date is of the essence of the Contract. Accordingly the Company shall upon notice to the Customer be entitled to withhold delivery and/or suspend the performance of the Contract generally if at the time of the notice payment of any amount stated on any of the Company's invoices (whether related to the Contract or not) is then overdue. If the Customer fails within 14 days of notice to settle the amount outstanding under the said invoices, then the Company shall be entitled to terminate the Contract without further notice.

5.4 The Customer shall not be entitled to retain, deduct or defer any sums whatsoever due to the Company under the Contract on account of any dispute cross claim or set off which it might have with the Company or with any company in the same group of companies as the Company.

6. Delivery and Performance

6.1 The performance of the Contract is subject to availability, and therefore in the event that it is unable to supply any specific Goods or any specific quantities of Goods, the Company reserves the right to provide suitable alternatives or suitable alternative quantities, and to make such reasonable adjustments (upwards or downwards) to the Contract price as are necessary to reflect the change. Such alterations shall not entitle the Customer to repudiate the Contract.

6.2 Unless otherwise indicated, and subject to the provisions of clause 4.3, the Company shall be responsible for arranging delivery of Goods to the Customer's premises. Accordingly the Customer undertakes to provide a safe and convenient access for the Company's delivery vehicles (or those of its agents) at each delivery point together with safe facilities for the loading and unloading of the Goods (including any assistance in loading and unloading that may be required). The placing of an order by the Customer shall be deemed to constitute authority for the Company's delivery vehicles (or those of its agents) to enter the Customer's premises where necessary and it shall be the responsibility of the Customer to supervise the safe discharge of each load.

6.3 Any time estimates or delivery dates given by the Company shall be by way of guidance only and shall not be of the essence of the Contract. Accordingly any delay in delivery shall not entitle the Customer to repudiate the Contract and the Company shall not be liable to the Customer (either in contract or tort) for any loss or damage whatsoever (including consequential losses, loss of profit and other losses of a similar nature) which may be suffered or sustained by it as a result of any failure by the Company to adhere to any time estimate or delivery date given.

6.4 If for any reason the Company still fails to deliver the Goods within any reasonable time limit specified by the Customer at any time after the Customer has purported to make time of the essence of the Contract, and a Court or any other arbiter subsequently finds the Company to be responsible for any loss or damage suffered by the Customer as a result thereof, the Company's liability therefore (both in contract and tort) shall be strictly limited to the excess (if any) of the cost to the Customer (over and above the Contract price) of obtaining similar goods (in the cheapest available market) to replace those not delivered.

6.5 Without prejudice to any of the above the Company shall be entitled to deliver the Goods by single delivery or installment at its option and, whenever the Goods are delivered, or are to be delivered, by installments, the Company shall be entitled to treat each delivery as a separate contract. Accordingly any failure by the Company to make one delivery (in whole or in part) shall not entitle the Customer to terminate any other contract or refuse any other deliveries.

7. Ownership and risk

7.1 Unless otherwise indicated, the risk of damage to the Goods shall pass to the Customer upon delivery to the Customer or its agents

7.2 However, title to the goods shall not pass to the Customer until the Company has received payment in full of all sums due from the Customer under the Contract together with any interest accrued thereon and other charges. In the meantime, the Company shall retain full legal and beneficial title to the Goods and the Customer shall (a) hold the goods in a fiduciary capacity as the Company's bailee free from any charge, lien or other encumbrance, (b) shall keep the Goods fully insured with a reputable insurer, and (c) shall store the Goods separately in such a way that they can be clearly identified as the Company's property. In this period the Company shall be entitled to recover possession of the Goods (or any of them) at any time and for any reason whatsoever and shall be entitled without restriction to lawfully enter upon the premises to the customer for the purposes of removing the Goods. The customer shall pay all costs and expenses incurred by the Company in exercising this right.

7.3 If, pending the passing title in the Goods, the Customer sells or otherwise disposes of the Goods in such manner as to pass valid title to a third party, the Customer shall hold the full proceeds of such a sale (and pending payment the right to receive the proceeds of such a sale) on trust for the Company in a separate and identifiable bank account. During the same period, the Customer will pay the said proceeds to the Company on demand notwithstanding that any period of credit extended to the Customer may not have expired. In addition the Customer agrees that it will assign to the Company upon the Company's request all of its rights (under such a contract of sale) against any subsequent purchaser of the Goods.

7.4 Notwithstanding that title may not have passed to the Customer, the Company may maintain an action for the price of the Goods supplied. The Customer acknowledges that nothing in clauses 7.2 and 7.3 above confers any right upon the Customer to return or reject the Goods supplied or to refuse, defer or delay payment for them.

8. Lien

8.1 The Company shall (without prejudice to any other remedy available to it) have in respect of all unpaid debts and other sums due from the Customer under the Contract a general lien on any goods and property whatsoever in its possession (whether in relation to the contract or otherwise) which are or intended to become the property of the Customer.

follow us on:



8.2 Pursuant to that lien, the Company shall be entitled upon fourteen days written notice to the Customer to sell any goods or property so held upon such items as it thinks fit, and to keep the proceeds of the sale thereof in diminution of the debts, the other sums due and all costs and expenses incurred in or about effecting the sale.

9. Cancellation of Orders

Orders for Goods which have been accepted by the Company may not be cancelled or suspended without the Company's prior written consent which consent the Company may give or withhold in its absolute discretion.

10. Invalidity of any Contractual Term

If any clause or sub-clause or part thereof contained in these Terms and Conditions is held by any court or other competent authority to be invalid or unenforceable in whole or in part, the validity of the remainder of the clause or sub-clause and of the remaining clauses and sub-clauses of these Terms and Conditions shall not be affected thereby.

11. Waiver

No waiver by the Company of any particular default or breach of Contract by the Customer shall be considered as a waiver of any subsequent default or breach of the same or of any other provision of the Contract.

12. Assignment

The Customer may not assign the benefit or burden of the Contract without the written consent of the Company which the Company may give or withhold in its absolute discretion.

13. Force Majeure

In the event that the normal course of the Contract is frustrated, prevented, interrupted, hindered, delayed or rendered unduly expensive in any way whatsoever through war, rebellion, civil commotion, strike, lock-out or industrial dispute, fire, explosion, earthquake, act of God, flood, drought or bad weather, the unavailability or late delivery of supplies, the inability to secure labour or by any other cause whatsoever beyond the Company's control, the Company shall promptly give notice thereof to the Customer and shall have the right to cancel the Contract or defer its performance for as long as such force majeure shall continue.

14. Proper Law

The construction validity and performance of the Contract shall be governed by English Law and all disputes or questions which may arise out of, or in connection with, or in relation to the Contract shall be decided by the English Courts.

15. Warranties and limitation of liability

15.1 All Goods are sold on the basis that the Customer is neither a consumer nor deals as a consumer within the meaning of the Unfair Contract Terms Act 1977. Where the Goods are supplied under a consumer transaction, the statutory rights of the Customer shall be unaffected by anything set out in these Terms and Conditions.

15.2 The Company hereby warrants that the Goods are at the date of delivery free from any material defect in workmanship and will remain free from any material defect in workmanship and materials for a period of 2 years from the date of delivery to the Customer and correspond with any agreed written specification but the Company's liabilities under this warranty shall be limited to making available free of charge the labour and materials required to make good any such defects or (at the Company's option) replacing any defective Goods. The Company's liability under this warranty is also subject to the following conditions and limitations:

- a. The Company will not accept any liability for any defective or faulty Goods supplied, unless the Customer gives the Company written notice of the defect or defects in question within 90 days of delivery (save where the defect or defects are of a nature which would not normally be apparent upon a reasonable inspection, in which case the notice of defect or defects must be given within 14 days of discovering the same);
- b. The Company will not accept any liability for goods damaged in transit unless the Customer gives it written notice of the damage within 5 working days of delivery;
- c. The Goods having been properly stored and used by the Customer prior to the defect occurring;
- d. The Company will not accept any liability whatsoever in relation to any goods which have been fitted incorrectly or subjected to any incorrect, abnormal or improper load use accident or unauthorised modification, repair or application, whether by the Customer or any third party;
- e. The goods having been used in accordance with the Company's instructions whether written or oral;
- f. The Goods having been subjected to proper and adequate inspection after installation and properly maintained in accordance with the Company's guidelines;
- g. The Goods having been returned at the Company's request but at the Customer's expense for inspection; and
- h. The Company having received the total price for the Goods by the due date for payment. Without

prejudice to the provisions of clause 7.1 above, all goods which are returned to or replaced by the Company, shall become the property of the Company.

15.3 The warranty contained in clause 15.2 is given in lieu of and shall be deemed to exclude all other warranties and conditions whether express or implied whether arising by common law, statute or otherwise to the fullest extent permitted by law, other than that relating to title to the Goods. The warranty contained in clause 15.2 does not extend to parts, materials or equipment not manufactured by the Company, in respect of which the Customer shall only be entitled to the benefit of any such warranty or guarantee as is given by the manufacturer to the Company.

The warranty contained in clause 15.2 does not extend to cosmetic defects occurring after supply. In corrosive atmospheres stainless steel parts may show discolouration.

15.4 Save as provided under the Unfair Contract Terms Act 1977 and as mentioned in this clause 15, all

liability (both in contract and in tort) of the Company for any consequential losses, loss of profit and other losses of a similar nature which may be suffered or sustained by the Customer in connection with the contract and/or the quality or performance of the goods supplied there under is excluded to the fullest extent permitted by law.

15.5 All Goods are sold on the basis that the Customer has satisfied itself as to the suitability of the Goods for use or resale in accordance with its own specialised knowledge and skill and the Customer acknowledges that it has not placed any reliance upon the skill or judgement of the Company or of any of the Company's servants or agents.

In the case of export orders, it is also the Customer's responsibility to ensure that the Goods comply with any legislation or regulations relating to their use in the country in question and the Company shall not therefore incur any liability whatever in respect thereof. The Company shall not be under any liability in respect of any defect arising from fair wear and tear, wilful damage or arising from any drawing, design or specification supplied by the Customer.

15.6 The Customer agrees to indemnify the Company against all claims relating to Goods sold to the Customer in respect of any loss damage or expense, whether direct or consequential, sustained by any third party save only in respect of death or personal injury caused by the negligence of the Company or any of its employees, agents or sub-contractors.

15.7 Notwithstanding the above provisions, the Company does not exclude or restrict its liability for death or personal injury caused by its negligence or that of its employees, agents or subcontractors.

15.8 Some states do not permit some of the limitations or exclusions noted above, so some of them may not apply to the Customer.

Did You Know?

Sta-Lok also have an incredible range of stainless steel solutions for architectural, construction and industrial applications. If you require any information on our range, request a digital brochure now by emailing enquiries@stalok.com

We also stock 100m, 200m and 300m stainless steel wire rope reels **available now** in 1x19, 7x19 and compacted strand.

STA-LOK[®]