

BioZinalium[®] coating system

*Creating sustainable solutions
for our customers*



Complete pipeline solutions

// 84% of the service life of a pipe is determined by its external coating* //

** See page 20*

Contents



The BioZinalium® revolution 2

Benefits 4

Performance 6

Zinc-aluminium alloy 8

Copper 12

Aquacoat® 16

+++ Durability 20



• natural •
• blutop •

from 2014, BioZinalium® coating will progressively replace Zinalium® coating in the Natural® and Blutop® ranges.

The revolution....


Always a coating ahead

Water Companies must publish information on their total leakage each year and have annual leakage reduction targets. This has a direct influence on maintenance, renewal and extension programmes for water networks, as well as encouraging the choice of reliable and durable pipes.

BioZinalium® is Saint-Gobain PAM's practical response to the genuine concerns of water network investors, managers and operators.

Saint-Gobain PAM's research into zinc-based coatings has constantly helped to improve the protection of buried networks of iron pipes.

Saint-Gobain PAM, driving innovation

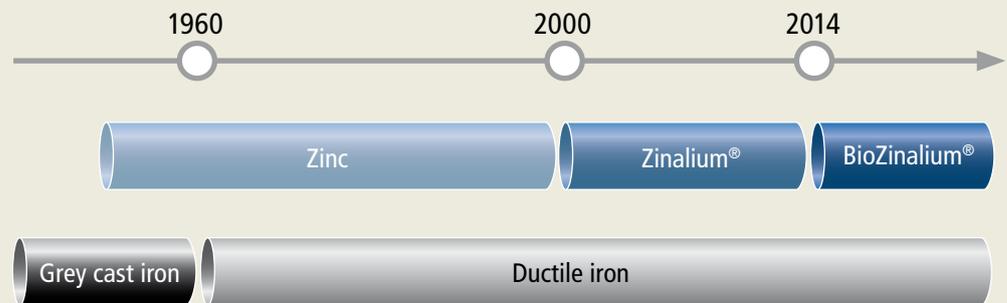


The answer to our clients' increasing demand



BioZinalium®

ZINC-ALUMINIUM + COPPER + AQUACOAT®

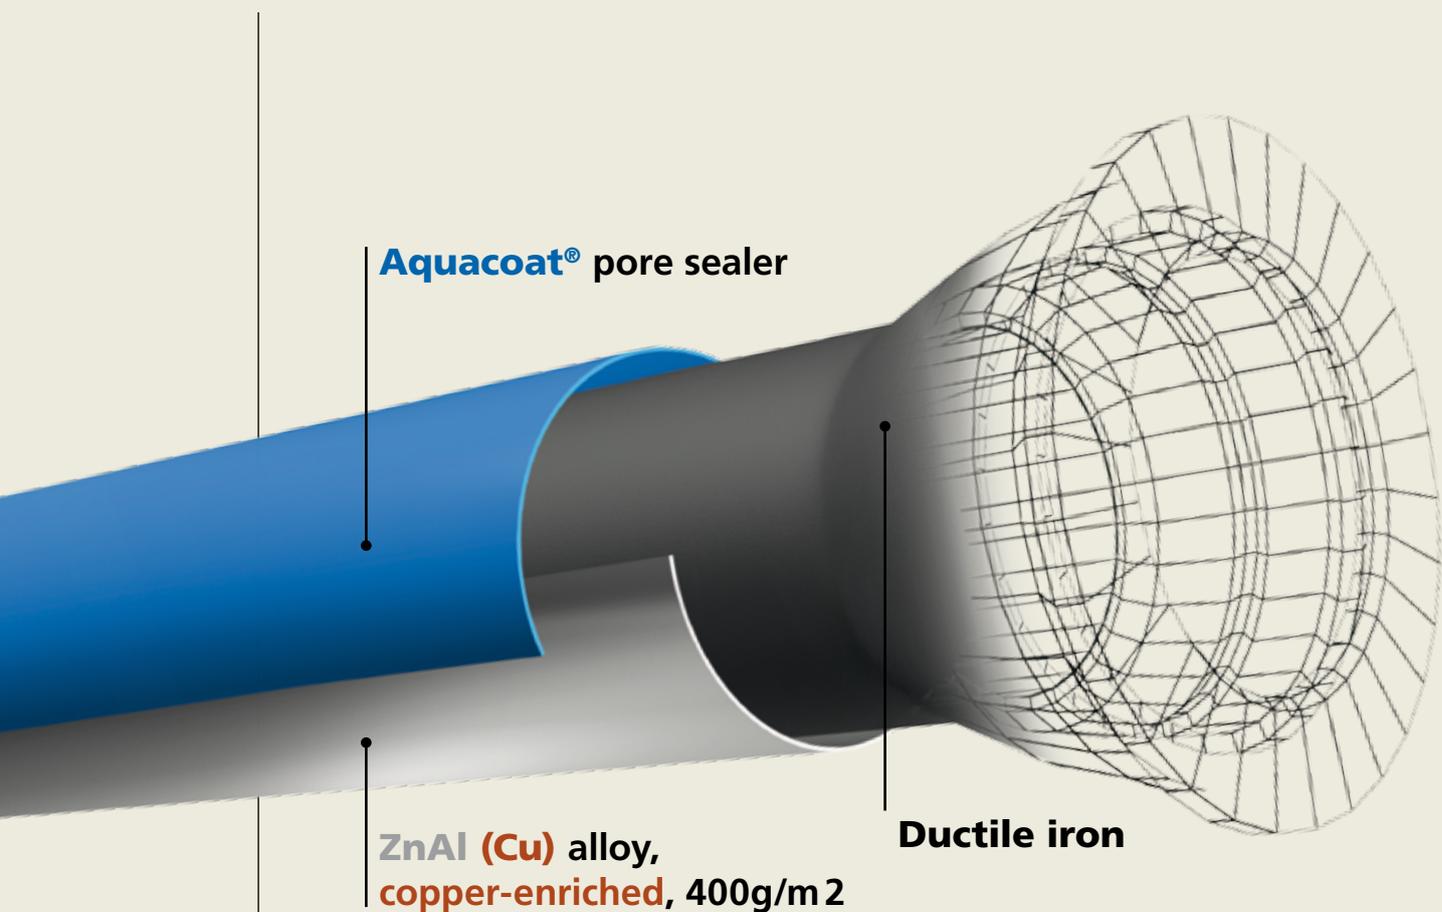

The BioZinalium® coating consists of two layers:

A layer of zinc-aluminium 85/15 alloy, enriched with copper, with a minimum surface density of 400g/m², applied by spraying molten metal onto the surface of the iron, using an electric arc spray gun, from ZnAl (Cu) alloy wire.

A protective layer of Aquacoat® (porous), a water-based blue paint of average thickness 80 microns applied using a spray gun.

Benefits

Durable, Reliable, Preventative

Overall corrosion protection

The BioZinalium® coating system benefits from the 'active' properties of the Zinc Aluminium alloy when in contact with the soil and in that it:

- Provides a long term barrier by forming a stable all-round protective layer (zinc hydroxides) covering the entire surface of the buried pipe
- Restores the protective layer at points where it has been slightly damaged (impacts during transportation, scrapes when backfilling)

The two-phase combination of aluminium and zinc in the ZnAl (Cu) alloy increases the effectiveness of the overall protective layer. When compared to pure zinc, it extends the areas of use (or the service life) in highly corrosive soils as defined in European standard EN545 : 2010 (appendix D.2.2.).

Protection against localised bio-corrosion

The copper enrichment of the ZnAl (Cu) alloy helps, by leveraging the bactericidal properties of copper, to reduce the potential risk of localised bio-corrosion in the following situations:

- anaerobic soils (heavy soils, wet clay soils, etc.);
- soils rich in SO_4^{2-} sulphates and organic matter;
- damage to the coating.

BioZinalium® therefore provides a brand new way of reducing this potential risk and thus impacting positively on the durability of the pipes.

Sustainable development commitment

The finishing coat (pore sealer) of BioZinalium® is produced using an emulsion of water-based resin, which contains neither organic solvents nor Bisphenol A (BPA).

It contributes to:



- reducing emissions of volatile organic compounds (VOCs) into the atmosphere,
- complying with sanitary recommendations for reducing the risk of exposure for the population and the environment to BPA.

As an illustration, the move to water-based paint in 2012, for other product ranges, helped to reduce VOC emissions by 24% in our Saint-Gobain PAM plants.



Benefits

Durable, Reliable, Preventative

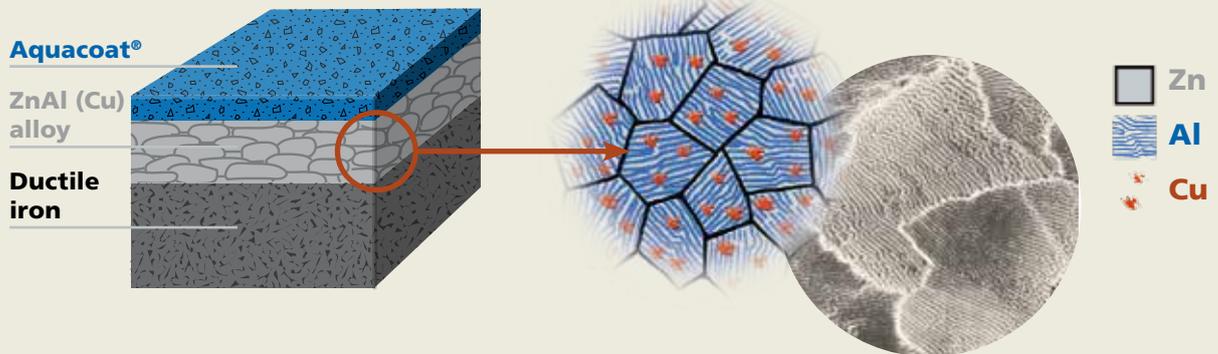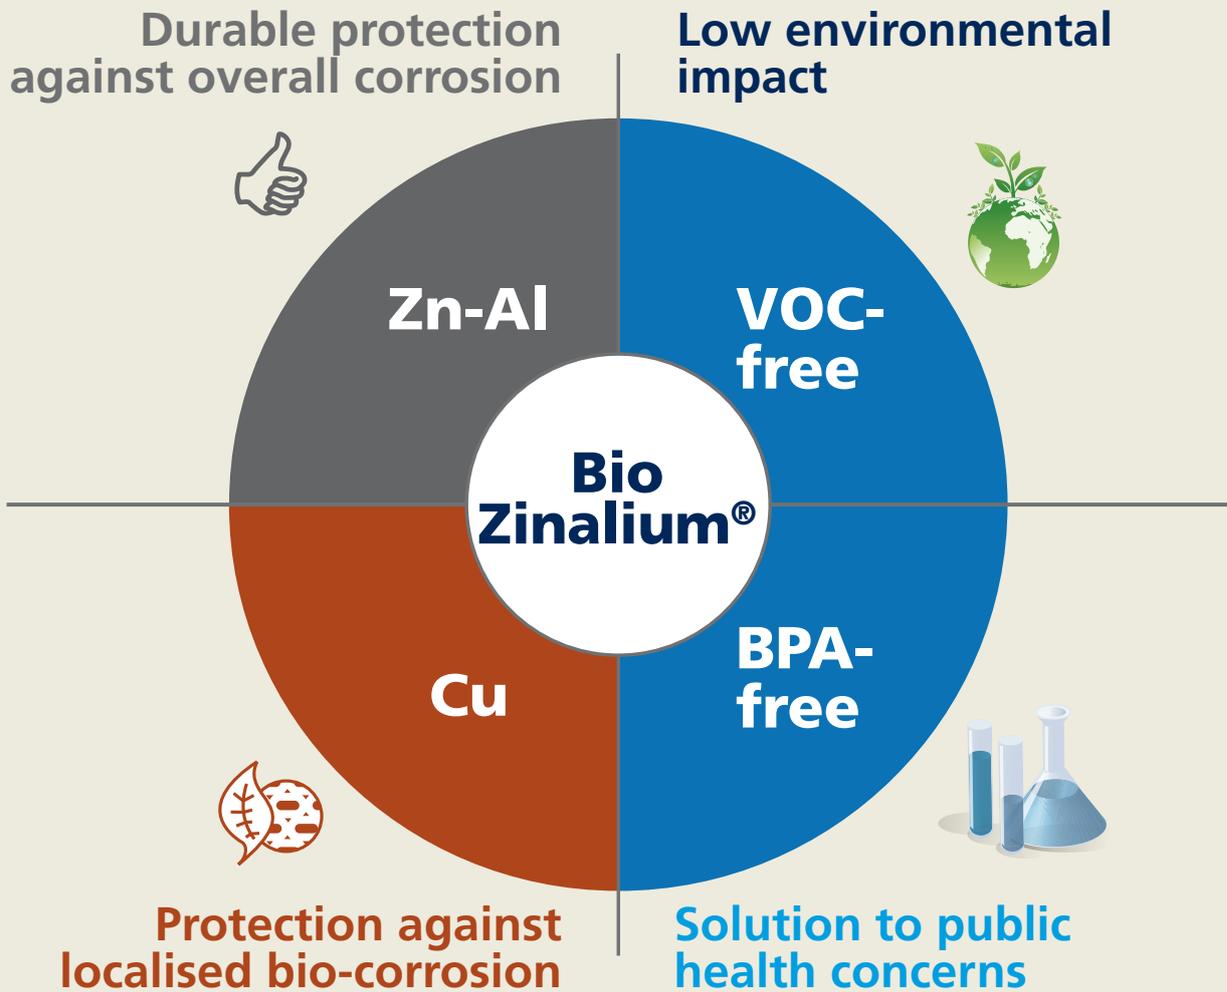


Performance

Pushing the boundaries

Key features of BioZinalium®

The active nature of the metal layer, the surface density applied and the properties of the finish layer are the 3 aspects which contribute to the effectiveness of zinc-based coating systems.

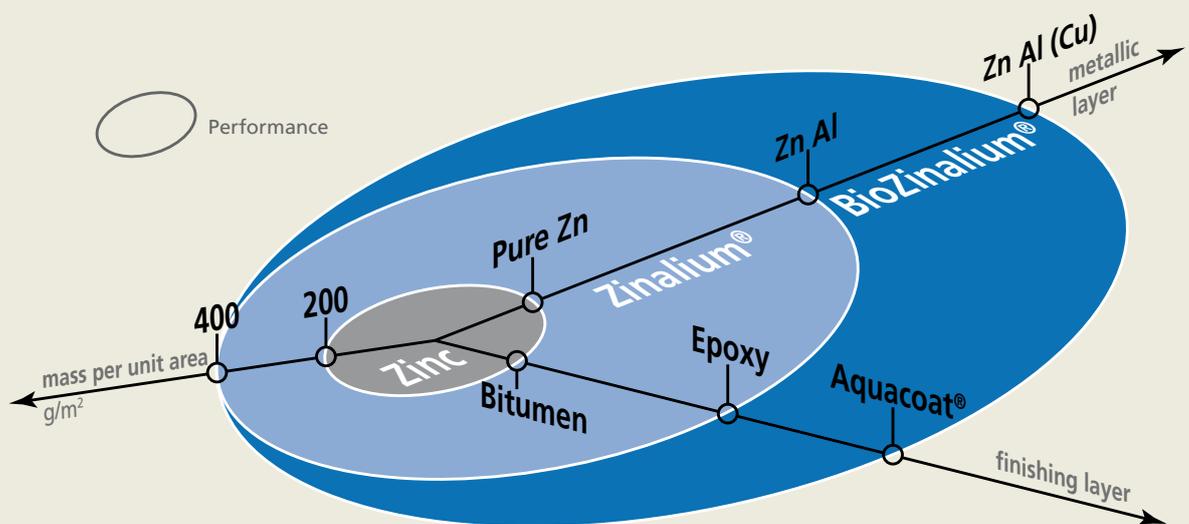

Compliance with standards

The BioZinalium® coating fully complies with European standard EN545:2010 and International standard ISO 2531.

The BioZinalium® coating is suitable for all types of soils, as defined in appendix D.2.2 of standard EN545:2010, apart from:

- acidic peaty soils;
- soils containing refuse, cinders, slag, or polluted by wastes or industrial effluents;
- soils below the marine water table with a resistivity lower than $500 \Omega\text{-cm}$

BioZinalium® is therefore suitable for over 90% of soils in the UK without the need for any further protection



Performance

Pushing the boundaries

The advantage of BioZinalium®

CRITERIA PERFORMANCE	ZN	Zinalium®	BioZinalium®
Overall corrosion protection: Resistivity greater than: 2500 Ω·cm beneath the water table 1500 Ω·cm above the water table (see standard EN 545: 2010 D.2.1)			
Resistivity equal to or greater than: 500 Ω·cm beneath the water table (see standard EN 545: 2010, D.2.2)			
Regeneration of the coating protection when damaged			
Protection against localised bio-corrosion			+
VOC-free (No volatile organic compounds)			+
BPA-free (No Bisphenol A)			+

- Copper enriched, BioZinalium® reduces the potential risk of localised bio-corrosion in the following situations:
- anaerobic soils (heavy soils, wet clay soils, etc.);
- soils rich in SO₄²⁻ sulphates and organic matter;
- damaged coating.

The BioZinalium® pore sealer, Aquacoat®, is WRAS approved which confirms its suitability for contact with potable water.

Zinc-Aluminium alloy

Overall protection against corrosion

Protection against corrosion

Waterlogged soil, mixture of backfill, variable oxygenation between sands and clays, etc all contribute to corrosion on unprotected iron pipes.


Pipes protected with a Zinc Aluminium alloy generate an outer protective layer as soon as they are in contact with the soil, regardless of the soil type or conditions.

This outer protective layer, together with the insulating effect of the elastomer gaskets used in the pipeline creates a true barrier against corrosion for buried ductile iron pipes.

The active properties of zinc

The BioZinalium® coating system benefits from the 'active' properties of the Zinc Aluminium alloy when in contact with the soil and in that it:

- **Provides a long term barrier by forming a stable all-round protective layer** (zinc hydroxides) covering the entire surface of the buried pipe
- **Restores the protective layer at points where it has been slightly damaged** (impacts during transportation, scrapes when backfilling) through the galvanic effect between the exposed iron and the zinc around the damage.

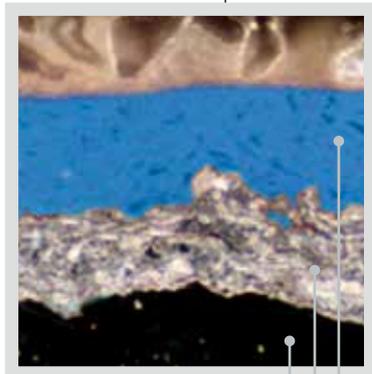

Cross-section of the coating

Aquacoat®

ZnAl (Cu) alloy


Ductile iron

**Service life
three times longer***

* see pages 11 & 20

Zinc-Aluminium alloy

Overall protection against corrosion

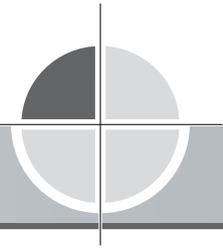


Aluminium, working together with zinc

The perfect combination of aluminium and zinc in the ZnAl (Cu) alloy considerably increases the strength of the protective properties of the outer layer.

The high quality zinc hydroxide layer can only form when the zinc transforms at an appropriate rate.

In BioZinalium®, this transformation is optimised by two factors:

- the porous paint layer is applied at an optimum thickness to allow both the formation of zinc hydroxides and the on going galvanic effect
- The presence of aluminium slows the transformation effect to allow the creation of a more stable protective layer compared to zinc alone, whilst allowing the sacrificial galvanic healing process to take place

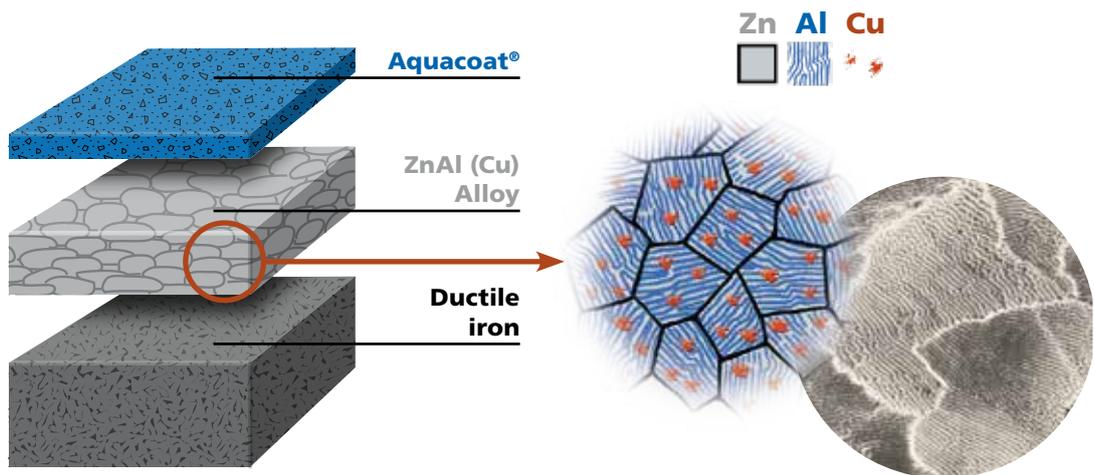

The 85% zinc, 15% aluminium composition gives the optimum effect.

The ZnAl (Cu) alloy extends the areas of use (or the service life) in highly corrosive soils as defined in European standard EN545: 2010 (appendix D.2.2.).

BioZinalium® is suitable for all types of soils, apart from:

- acidic peaty soils;
- soils containing refuse, cinders, slag, or polluted by wastes or industrial effluents;
- soils below the marine water table with a resistivity lower than 500 Ω -cm

BioZinalium® is therefore suitable for over 90% of soils in the UK without the need for any further protection.

Zinc-Aluminium alloy

Service life three times longer*

Comprehensive long-term studies on real sites



Saint-Gobain PAM has used the Mont-Saint-Michel site to test the coatings of its pipes since 1932.

A large-scale trial involved burying pipes under real conditions in the marine sands of the Saint-Gobain PAM test site in Mont-Saint-Michel, France and unearthing them **14 years later**

The conditions were particularly aggressive:

- sand of resistivity of **100 Ω·cm**;
- laid at a depth of 1.2 m;
- pipes buried vertically and horizontally.

The test was used to compare the behaviour of the 200 g/m² zinc + 80 μm bituminous paint coating and the 400 g/m² ZnAl 85/15 + 100 μm epoxy coating.


Results for the horizontally-laid pipes, unearthed after 14 years:

on the 2 coatings, a whitening of their original colour could be observed, a sign of the transformation of the zinc components and therefore successful formation of the protective layer ①.

The zinc has also restored the external protection where the pipe was initially damaged. This capability is known as self-healing ②.



200 g/m² zinc + 80 μm bituminous paint coating

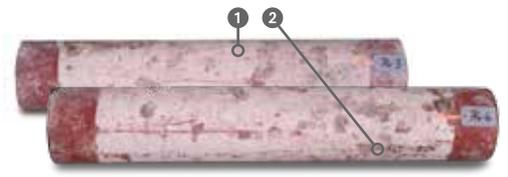


ZnAl 85/15 400 g/m² + 100 μm epoxy coating

Results for the vertically-laid pipes, unearthed after 14 years

With the pure zinc coating, the beginnings of a corrosive attack ③ can be seen, corresponding to the part furthest away from the soil surface (differential aeration phenomenon)

No signs of an attack are detectable on the pipe coated with the ZnAl 85/15 alloy

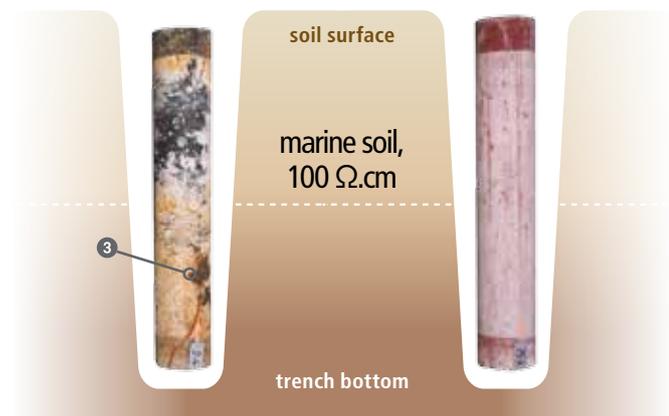

200 g/m² zinc + 80 μm bituminous paint coating

ZnAl 85/15 400 g/m² + 100 μm epoxy coating

* see pages 11 & 20

Zinc-Aluminium alloy

Service life three times longer*




Speed of attack reduced by a factor of 3

This very severe test involves recreating a situation frequently encountered by buried pipes: differential oxygenation between the upper and lower parts of the trench (due to the depth or the presence of **water tables**) which can intensify the corrosive effect of the soil. This is known as a "**geological cell**".

These geological cells have been recreated in instrumented laboratory cylinders, with 4 types of soil (sand, limestone, clay and peat) while simulating a fluctuating water table.

Source: a new coating for DI pipe based on Zinc-Aluminium 85-15 alloy/
Gérard Nouail – SGPAM/3R international-n°40/2001

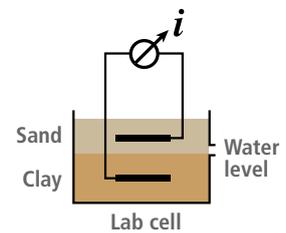

Recreations of 6 geological cells in the laboratory


Example on a clay/sand geological cell over 13 months

- Clay 200 Ω-cm + sulphates, sand 0-2 mm, saline solution
- Pure zinc 400 g/m² and ZnAl 85/15 400 g/m² applied to pipe samples (25x25cm)



By measuring the current exchanged between the 2 cell elements, we observe that the ZnAl 85/15 alloy is much less converted than the zinc.

The ZnAl 85/15 alloy has reduced the corrosion rate by a factor of 3.

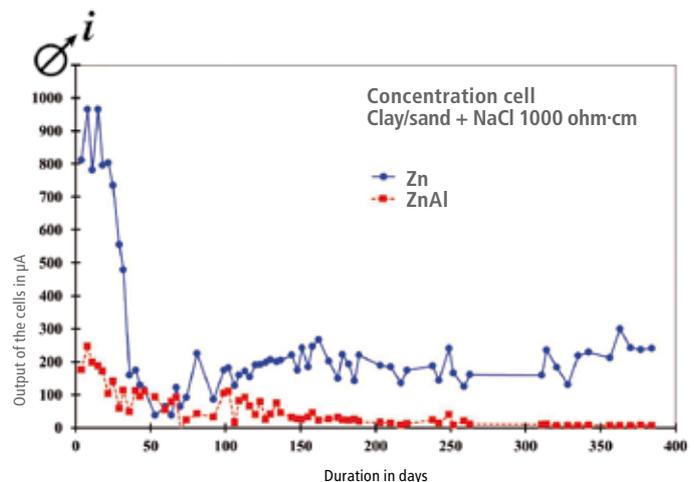

* see pages 10 & 20

Copper

Targeted impact on bio-corrosion

Localised bio-corrosion



Example of localised bio-corrosion

Corrosion of exposed iron in soils is an electrochemical reaction which, in simple terms, is similar to the iron being "dissolved" in the soil:



Various micro-organisms, present locally in the soil, can increase the electrochemical corrosion process by promoting the capture of the electrons released by the oxidation of the iron to "feed". This is called "bio-corrosion".

It is most commonly observed in anaerobic conditions, such as wet clay soils. It involves sulphate-reducing bacteria (SRBs) which "take these electrons" to "feed" by reducing the sulphates commonly found in the natural environment. The sulphides formed react with ferrous ions.




The growth of these bacteria can be detected by the formation of a film of iron sulphide and a biofilm on the surface of the pipe.

Favourable conditions for localised bio-corrosive attacks are:

- anaerobic environments (heavy, clay and wet soils);
- "nourishing" soils (containing sulphates SO_4^{2-} , organic matter);
- the presence of iron (e.g. damage to the coating).


Source: "rôle des bactéries sulfurogènes dans la corrosion du fer" (role of sulphidogenic bacteria in the corrosion of iron) article/R. Marchal/revue IFP/54-1999-5

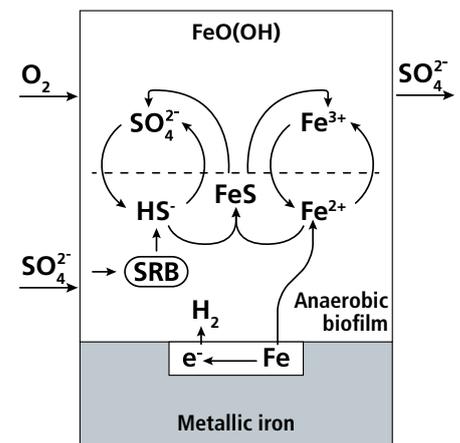

Protection against localised bio-corrosion

Copper

Targeted impact on bio-corrosion

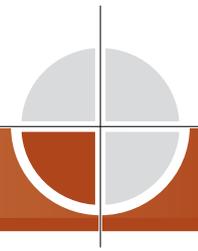

Copper, a powerful bactericide



Copper is a material that is part of our everyday lives: containers, water pipes for sinks, coins (from ancient times to the present day).

Copper is an active component in many products to kill or inactivate pathogenic bacteria, moulds and viruses: in agriculture, the marine environment, the food production chain and domestic hygiene. It is recommended in hospitals for restricting hospital-acquired infections (e.g. handles and handrails).

The US American Environmental Protection Agency (EPA) officially registered copper as an anti-bacterial agent in 2008.




Copper affects bacteria in two stages:

- perforation of the cell membrane by Cu^+ ions (short-circuit or oxidation),
- then penetration and invasion of the cell, thereby blocking the enzymes it requires for metabolism and killing it.

The copper included in the ZnAl(Cu) alloy remains in place and is not consumed by the metabolism of the bacteria. It only modifies the electrochemical processes. The antibacterial effect of ionic copper begins immediately by completely eradicating bacteria within a few hours. Oxidation of the copper does not diminish its bactericidal ability in any way.

Saint-Gobain PAM engineers and researchers have ascertained the right amount of copper to achieve the optimal bactericidal effect of around 0.5 %.

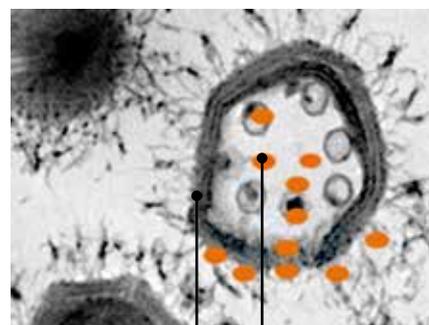

Cu^+ copper ions
Bacterium membrane

The copper perforates the membrane of the bacterium then invades it and blocks its metabolism.

Copper

Protection against localised bio-corrosion

From metallurgy to biology



Saint-Gobain
PAM Research Centre

The Saint-Gobain PAM Research Centre has developed a testing methodology with the support of the bacteriology laboratory of the University of Clermont-Ferrand (France).

The tests focused on samples of ductile iron coated with ZnAl 85/15 and ZnAl(Cu), exposed to 2 different inoculants, containing respectively:

- anaerobic strain: *Pseudomonas Aeruginosa* (ATCC 27853),
- anaerobic strain: *desulfovibrio desulfuricans* (ATCC 27774).


Each sample was exposed to the inoculant for 4, 8 and 24 hours at 35°C. The biofilm which develops on the surface is then recovered via sonication and incubated on nutrient agar to allow the surviving population to grow.

Rapid action of copper

The biocidal power is assessed in the presence of strains of *Pseudomonas Aeruginosa*.

The breakdown below shows that the bacterial activity on the surface of the ZnAl(Cu) coated sample stopped within 4 hours, whereas it continued up to 24 hours for a sample coated with ZnAl.

Fluorescent observation of the sample surfaces reveals the surfaces which have been colonised by living bacteria (clear surfaces) and quantifies them. Extensive bacterial colonisation on the surface of the ZnAl layer can be observed, much greater than the traces of colonisation on the surface of the BioZinalium® ZnAl (Cu) layer.

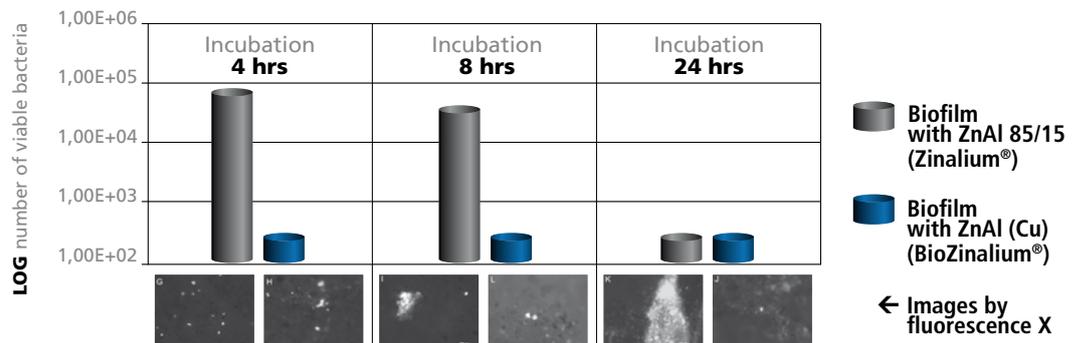

Copper

Protection against localised bio-corrosion



Effectiveness of Copper

Bacterial activity is measured in the presence of *Desulfovibrio Desulfuricans* strains (SRBs).

The samples of coated ductile iron (2x2 cm² pieces) are processed in several stages:

- inoculation and accelerated weathering (in solution) to trigger the reaction between iron, bacteria and copper;
- recovery of the biofilm via sonication and washing;
- incubation of the biofilm for 14 days at 30°C, with different dilutions.

Finally, count the surviving population in the incubated biofilm, using the MPN (Most Probable Number) technique.

A dark colouration highlights bacterial activity, a clear colouration indicates the absence of any bacterial activity. The dilution level corresponds to the change in colour and provides information about the effectiveness of the biocide.



A Row with Biofilm on ZnAl (Cu) (BioZinalium®)
B Row with Biofilm on ZnAl 85/15 (control)



A The comparative test is conducted 3 times (I, II, III). The following observations can be made from the series of test tubes opposite:
B



- Rows **(A)** with biofilm on ZnAl (Cu) (BioZinalium®): **no surviving bacteria**, in all 3 cases **(I, II and III)**.
- Rows **(B)** with biofilm on ZnAl (control): **surviving bacteria remain**, in 2 out of 3 cases **(I and III)**, estimated at 2.5×10^5 bacteria per cm², using the MPN method.

Aquacoat®

Benefits of water-based protection



Repair on Epoxy



Repair on Aquacoat®



Hard-wearing...

Aquacoat®, the pore sealer for BioZinalium® is a single component paint made from a copolymer resin in a water-based emulsion.

The film is applied by physical drying (evaporation of water at 50°C) and irreversible coalescence of the organic particles.

The particles "agglomerated" in this way form a uniform, stable and adhesive protective film, with an average thickness of 80 µm, resistant to atmospheric conditions (stockyards) and to the soil.

Its mechanical and chemical properties are compatible with the increased resistance of the ZnAl (Cu) alloy.

... And ease of application

Aquacoat® is a single component paint, with the following practical advantages:

In the workshop: it removes the risk of incorrect mixtures, thereby eliminating potential visual defects (variable colouring), performance defects (quality of the film) or sanitary compliance faults.

On site: Unaffected by the moisture content of the substrate and easy drying, it is well suited to repair conditions following transport and on site off-loading.

A repair made using bi-component epoxy paints is frequently visible, but virtually invisible when a single-component paint is used.

Numerous tests have been conducted to verify the resistance of the BioZinalium® Aquacoat® pore sealer. The table of results opposite shows that its performance when implemented with buried pipes is at least equivalent to that of the Zinalium® epoxy pore sealer.

**The ecological
and healthy choice**



Remarkable durability

Parameters tested	Methodology	Criteria	Comparative Results	
			Epoxy pore sealer	Aquacoat® pore sealer
Cross-cut test	NF EN ISO 2409	adhesion score	positive	positive
Falling backfill	55x10kg of gravel (2-14 mm) falling from a height of 2.50m	no perforation of the pore sealer	positive	positive
Temperature of the water in the pipe	NF EN 545 : 2010	≤ 50 °C	yes	yes
Water absorption	in-house methodology	absorption of ionised water at 20 °C on clear film	≈ 0 %	≈ 3 %
Contact with drinking water	WRAS approved		yes	yes
Action on the galvanic effect of ZnAl	Zn Al + pore sealer 50 °C saline solution 100 Ω·cm	> 150 days	> 400 days	> 400 days
Artificial weathering and exposure to artificial radiation	NF EN ISO 11341	(500 hours of exposure/500 W/m ² / Dry air temp 55 °C - Method No. 1/ cycle A)	see below*	 see below*
	NF ISO 7724-3	change of colour DE	DE = 13.7	DE = 4.9
	NF EN ISO 2813	loss of gloss at 60°	74,8 %	17,6 %
Drying properties	kiln drying	speed of drying	40 min at 70 °C	12 min at 60 °C

* **Details of the accelerated weathering test (500 hours of UV exposure)**

- the epoxy is glossy and then takes on a clear matt appearance over time (whitening),
- the new Aquacoat® is satin finish and retains the colour over time.



Aquacoat®

The ecological and healthy choice

VOC-free (No volatile organic compounds)



Definition and sources

Put simply, VOCs are gases emitted by the combustion of fuels or evaporation of solvents contained in certain materials and products. Their common factor is that they evaporate more or less quickly at ambient temperature and are found in the air. Today there are more than 300 different types.

Their sources can be natural (forests, meadows) or man-made (e.g. transport, industry).

There are numerous man-made sources, including the following industrial processes: chemistry, degreasing of metals, painting, printing, glues and adhesives, oil refining, etc.

Examples of well-known VOCs include:

- paint solvents (e.g. xylene, toluene),
- solvents in inks.

Toxic effects on health and the environment

The effects of VOCs vary considerably depending on the type of pollutant concerned. They range from an unpleasant smells to mutagenic and carcinogenic effects (e.g. benzene, certain polycyclic aromatic hydrocarbons), as well as various irritations and a reduction in respiratory capacity. The symptomatology related to VOCs is complex and nonspecific.

Being highly volatile, VOCs can spread considerable distances from where they are emitted. They contribute to photochemical reactions in the lower atmosphere, thus causing an increase in the concentration of ozone in the troposphere. VOCs are therefore greenhouse gases with an indirect adverse effect on health.

Legislation

On 1st December 1999, the United Nations Economic Commission for Europe (UNECE) obtained a commitment from 26 European countries, including France, Germany, Spain and United Kingdom, as part of the Gothenburg protocol, to comply with limits on emissions of harmful gases (including VOCs) in order to reduce the impact of atmospheric pollution on health and the environment.

In France, work to reduce volatile organic compounds is part of a national initiative by the Inspection des Installations Classées (French Inspectorate of Classified Installations). In the sectors where solvents are used (e.g. printing, painting), the aim was to reduce emissions by 50% in 2010.

In the UK, The Solvent Emissions (England and Wales) Regulations 2004, have been introduced to further limit the emissions of volatile organic compounds due to the use of organic solvents in certain activities and installations (printing, painting, manufacturing, etc) and are enforced by the Environment Agency and local authorities.



Aquacoat®


The ecological and healthy choice



BPA-free (No Bisphenol A)

Definition and sources

Bisphenol A (BPA) is a chemical compound formed from the reaction between two parts of phenol and one part of acetone.

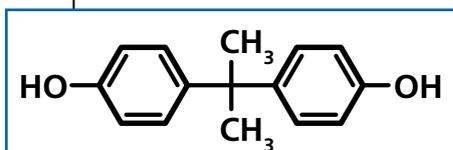

BPA is a synthetic chemical substance which has been used for more than 50 years. It is found as a residue from the synthesis of plastics such as polycarbonates and epoxy resins. It is easily leachable, especially at high temperatures.

Toxic effects on health and the environment

BPA is on the list of endocrine disruptors.

The toxicity of BPAs is related to:

- its effects on the reproductive system and the mammary glands,
- its effects on metabolism and obesity,
- its effects on the brain and behaviour.

The extent of Bisphenol A toxicity and ecotoxicity and, indirectly, the "acceptable daily intake", are still the subject of scientific and social debate, reflecting the complex nature of the problem and the difficulty of understanding them.

Nonetheless, as a precautionary measure, countries are gradually putting legislation in place to reduce the risk of exposure of the population (particularly pregnant women and infants) through their diet (e.g. materials in contact with food) or from handling them in the workplace (e.g. thermal paper from cash registers).

Initiatives across the world


Timeline:

- 2007, AESA report stipulating the acceptable daily intake (ADI),
- 2008, FDA (Food and Drug Administration) report recommending limiting exposure,
- 2011, ANSES (Agence Nationale de Sécurité Sanitaire, French health protection agency) on the health effects of BPA,
- 2012, French law prohibiting the manufacture, import and marketing of any packaging for food purposes containing BPA (effective from end 2015).



+++Durability

Contribution of the coating to the service life

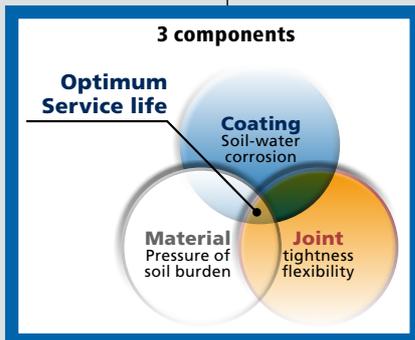

The optimum service life is achieved when the 3 components - material, coatings and assemblies - are completely reliable.

The service life of a pipe depends on the performance of the following 3 components:

- **the material:** resistant to mechanical stresses (hydraulic pressure and weight of earth),
- **the coatings:** resistant to chemical attack (from water and soil),
- **the assemblies:** maintain watertightness in all circumstances (excess pressure or movement of the ground).

Saint-Gobain PAM has therefore developed an original and rational approach to individually assess the contribution of the coating to the service life:

Researchers have been working with a mathematical forecasting model, developed by Saint-Gobain. It is based on an algorithm which calculates cumulative probabilities, capable of assessing the risk of perforation, taking account of:


- the laws of ductile iron corrosion (rate of attack depending on the environment);
- the performance of the coatings in the different soil types encountered;
- the geological distribution of the soils and their blends;
- the vagaries of installation.

Taking into account these numerous variables, the probability model can be used to assess the "life expectancy" of a pipe by adding the zinc/aluminium alloy conversion time, the delay in the passive conversion of the hydroxide layer of the alloy and the ductile iron corrosion time.

****With this model, the life expectancy of a BioZinalium® Natural C40 EN 545 : 2010 pipe buried in soil of resistivity of 2500 Ω·cm is estimated at 150 years.**

The software has been calibrated from an analysis of around one hundred samples taken from existing networks.

Contribution of the coating to the life expectancy of a buried pipe

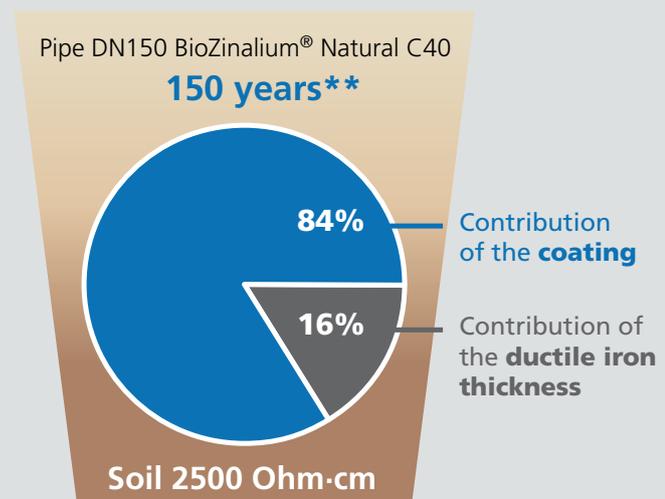

Your challenges

BioZinalium[®] solutions

Your investment

✓ Service life three times longer

Failure rate

✓ Protection against localised bio-corrosion

Water quality

✓ BPA-free

Environmental impact

✓ VOC-free

Other products and services available from Saint-Gobain PAM UK:

Please visit our website:

www.saint-gobain-pam.co.uk
to download electronic versions
or to request hard copies of this
brochure.

Water and Sewer Technical Enquiries and Assistance

Tel: +44 (0)115 930 0700
Email: technical.pipes.uk.pam@saint-gobain.com

Sales Enquiries

Tel: +44 (0)115 930 0681
Fax: +44 (0)115 930 0648
Email: sales.uk.pam@saint-gobain.com

Head Office

Lows Lane
Stanton-by-Dale
Ilkeston
Derbyshire
DE7 4QU
Tel: +44 (0)115 930 5000
Fax: +44 (0)115 932 9513

visit: www.saint-gobain-pam.co.uk

The information given in this literature is, to the best of our knowledge, correct at the time of going to print. However, Saint-Gobain PAM UK is constantly looking at ways of improving their products and services and therefore reserve the right to change, without prior notice, any of the data contained in this publication. Any orders placed will be subject to our Standard Conditions of Sale, available on request.

© 2014 Saint-Gobain PAM UK.



Ensign

Market leading cast iron above and below ground drainage system kitemarked to BS EN 877 for commercial, residential and public buildings.



Access Covers and Gratings

Innovative ductile iron solutions for highway, utility and telecom applications



VortX Floor Drainage

A new generation of roof and floor drainage products designed in accordance with BS EN 1253.



Water and Sewer

Ductile iron pipes & fittings for potable water and sewerage applications.



Blutop

Innovative ductile iron pipeline system dedicated to small diameter potable water distribution.



Valves & Hydrants

Valves, hydrants couplings and adaptors for potable water and sewerage applications.

Local Distributor