

Global leaders in flexible couplings,
drainage & plumbing systems



PVC Couplings

Black/Grey



Manufactured from a durable, high quality thermoplastic compound, Flexseal PVC Couplings have the dimensional flexibility that ensures a leakproof seal on any pipe material. Flexseal PVC Couplings are available in Black or Grey, which gives a more aesthetic solution for grey pipe systems, enabling the couplings to blend in and be particularly useful when couplings are visible. All Flexseal PVC Couplings are Phthalate free.

Product specification for Flexseal PVC Coupling Range

Description	Thermoplastic Coupling
Material	Flexible PVC (Polyvinylchloride)
Steel	1.4310 (301) Stainless Steel or 1.4301 (304) Stainless Steel 1.4401 (316) Stainless Steel Available on request
Pressure Rating	0.5bar, 7.25psi
Temperature Range	-34°C to 60°C Intermittent (40°C Constant)
Tightening Torque	6Nm

Global leaders in flexible couplings,
drainage & plumbing systems



Benefits

- Quick, versatile and easy to use
- Suitable for above and below ground applications
- Suitable for domestic drain, waste and vent solutions.
- Can be installed on any pipe material.
- Grey Couplings blend in with grey pipe systems.
- Suitable for Aquatic pipe systems.
- A proven, tested and durable Coupling design ensuring a high performance and a reliable watertight connection.



Straight Couplings Product Range

Part No.	Size Range (mm)	Width (mm)	Colour
027 - 027B	27 - 23	60	Black
027-027G	27 - 23	60	Grey
E028-028G*	28 - 21	60	Grey
035-035B	35 - 28	60	Black
035-035G	35 - 28	60	Grey
E038-038BL*	38 - 31	60	Black
E038-038G*	38 - 31	60	Grey
041-041	41 - 38	88	Black
E042-042BL*	42 - 32	86	Black
E042-042G*	42 - 32	86	Grey
E045-045BL*	45 - 38	86	Black
E045-045G*	45 - 38	86	Grey
049-049	49 - 44	88	Black
E050-050BL*	50 - 40	86	Black
E050-050G*	50 - 40	86	Grey
E058-058BL*	58 - 50	86	Black
E058-058G*	58 - 50	86	Grey
059-059	59 - 54	101	Black
062-062	62 - 56	88	Black
E063-063G*	63 - 55	86	Grey
E068-068G*	68 - 60	86	Grey
070-070	70 - 65	101	Black

Part No.	Size Range (mm)	Width (mm)	Colour
E085-085BL*	85 - 75	100	Black
E085-085G*	85 - 75	100	Grey
086-086	86 - 80	101	Black
090-090	90 - 80	101	Black
E090-090BL*	90 - 80	100	Black
E090-090G*	90 - 80	100	Grey
E095-095G*	95 - 85	100	Grey
101-101	101 - 95	101	Black
112-112*	112 - 101	101	Black
E112-112G*	112 - 101	100	Grey
121-121	121 - 111	101	Black
E122-122G*	122 - 112	100	Grey
127-127	127 - 118	101	Black
E130-130BL*	130 - 120	100	Black
E130-130G*	130 - 120	100	Grey
133-133	133 - 127	101	Black
142-142	142 - 136	101	Black
149-149	149 - 138	101	Black
162-162	162 - 152	101	Black
176-176	176 - 165	101	Black
188-188	188 - 180	101	Black
219-219	219 - 206	101	Black

* = Available with 1.4301 (304) Stainless Steel as standard

Global leaders in flexible couplings,
drainage & plumbing systems



Adaptor Couplings Product Range


Part No.	Size Range A (mm)	Size Range B (mm)	Width (mm)	Colour
E040-032G*	40 - 32	32 - 25	86	Grey
E045-038G*	45 - 38	38 - 30	86	Grey
048-038	48 - 43	38 - 32	57	Black
049-041	49 - 44	41 - 38	88	Black
E050-042BL*	50 - 40	40 - 32	86	Black
E050-042G*	50 - 40	40 - 32	86	Grey
E050-032G*	50 - 42	32 - 25	86	Grey
E058-038G*	58 - 50	38 - 30	86	Grey
E058-045BL*	58 - 50	45 - 37	86	Black
E058-045G*	58 - 50	45 - 38	86	Grey
059-048	59 - 54	48 - 44	101	Black
060-034	60 - 53	34 - 29	57	Black
060-038	60 - 53	38 - 32	57	Black
061-047	61 - 56	47 - 44	88	Black
070-060	70 - 65	60 - 57	100	Black
084-060	84 - 79	60 - 56	101	Black
E085-058G*	85 - 75	58 - 50	100	Grey
E085-068G*	85 - 75	68 - 60	100	Grey
086-047	86 - 80	47 - 44	101	Black
E090-063G*	90 - 80	61 - 53	100	Grey
101-089	101 - 95	89 - 85	101	Black
111-049	111 - 104	49 - 44	101	Black
111-085	111 - 104	85 - 76	101	Black
E112-050G*	112 - 100	50 - 40	100	Grey
E112-085BL*	112 - 100	85 - 75	100	Black

Part No.	Size Range A (mm)	Size Range B (mm)	Width (mm)	Colour
E112-045G*	112 - 102	45 - 38	100	Grey
E112-085G*	112 - 102	85 - 75	100	Grey
113-059	113 - 106	59 - 53	101	Black
E122-112BL*	122 - 110	112 - 100	100	Black
E122-112G*	122 - 112	112 - 102	100	Grey
123-111	123 - 114	111 - 101	101	Black
127-115	127 - 118	115 - 104	101	Black
E130-122G*	130 - 120	122 - 112	100	Grey
133-112*	133 - 111	112 - 104	101	Black
133-084	133 - 111	84 - 79	101	Black
135-115*	135 - 113	115 - 107	101	Black
140-087	140 - 131	87 - 80	101	Black
142-111	142 - 136	111 - 101	101	Black
143-109	143 - 136	109 - 101	101	Black
160-133	160 - 149	133 - 111	152	Black
163-111	163 - 155	111 - 101	152	Black
187-111	187 - 177	111 - 101	152	Black
190-162	190 - 177	162 - 152	152	Black
199-111	199 - 187	111 - 101	152	Black
214-158	214 - 203	158 - 149	152	Black
241-162	241 - 228	162 - 152	152	Black
247-215	247 - 231	215 - 203	152	Black
276-269	276 - 260	269 - 250	152	Black
320-269	320 - 298	269 - 259	152	Black
323-267	323 - 298	267 - 254	152	Black

* = Available with 1.4301 (304) Stainless Steel as standard

Applications

- Can be used to connect plain ended pipes
- Repair of existing pipe systems by replacing short sections of pipe
- Connects short and cut lengths of pipe
- An inexpensive option when a shielded coupling is not required

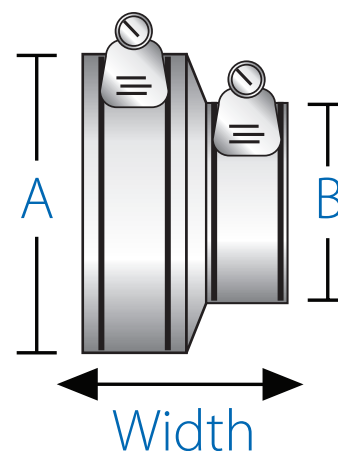

V001APR18