


White Aluminium

KASAI GENERAL INFORMATION, TECHNICAL & HEAT OUTPUTS

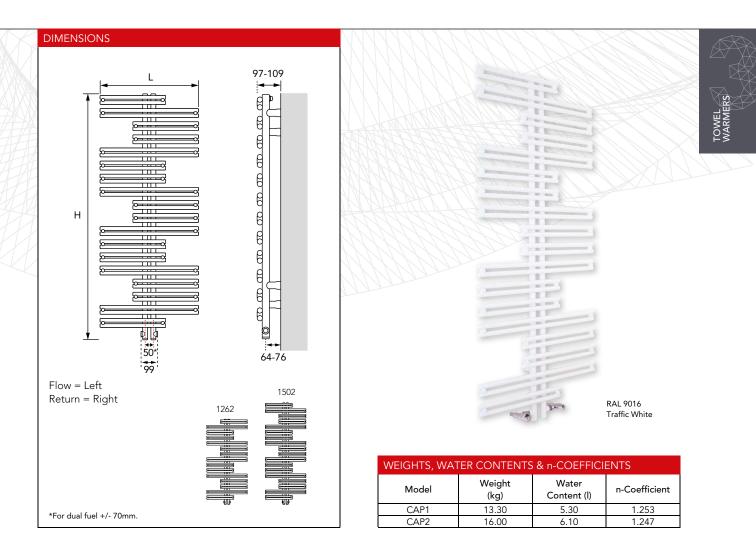

GENERAL SPECIFICATION

- 4		
- 68	<u> </u>	
- 1		

CERTIFICATION

Manufactured and tested to EN 442. Carries the BS Kitemark and CE Mark. Produced under a quality management system -ISO 9001:2015, environmental management system -ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.

GUARANTEE

10 year guarantee from date of purchase against manufacturing defects.

COLOUR

Finished in white (RAL 9016) or selected RAL, textured, metallic or shimmer metallic colours. Please see page 278.

MATERIAL

Manufactured from steel.

ACCESSORIES

Please see page 145.

SYSTEM

2 pipe pumped indirect domestic and commercial heating applications.

CONNECTIONS

4 x ½" BSP as standard - side or bottom connection possibilities.

AIR VENTS

Included in the packaging. OPERATING PRESSURES Tested to a pressure of 13 bar.

Working pressure of up to 10 bar. DUAL FUEL

ECO450 dual fuel heater kit available. Please see page 144.

DELIVERY Non-stocked item: 6 - 8 weeks.

VALVES

Please see page 144.

For more general information, please see page 276.

Order Code Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ \]T 50°C		Heat Outputs @ \]T 30°C		Dual Fuel Rating	
	(1111)	(1111)	Watts	Btu/h	Watts	Btu/h	Watts
CAP1	1262	600	613	2092	323	1102	450
CAP2	1502	600	724	2470	383	1307	450