




OUSE

OUSE is a highly practical combination radiator. At its centre is a PREMIER HE radiator that produces high heat outputs. This is surrounded by a functional round tube frame that is manufactured from high quality brass and has an attractive polished chrome plated finish.

DIMENSIONS

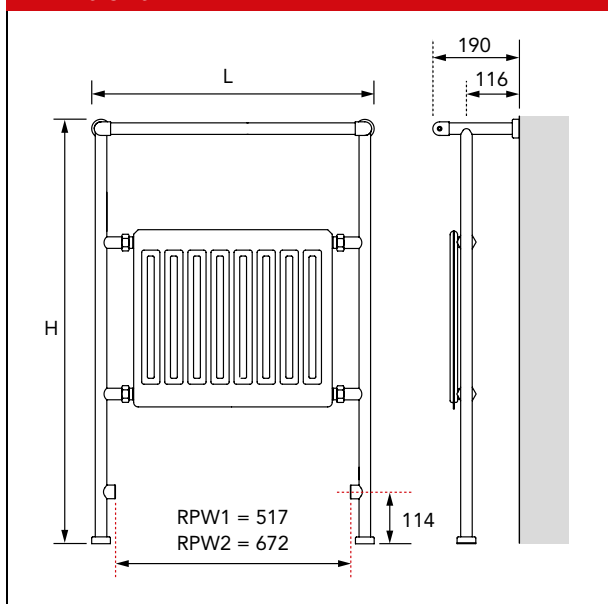

WEIGHTS & n-COEFFICIENTS

Model	Weight (kg)	n-Coefficient
RPW1	10.90	1.212
RPW2	12.40	1.212

GENERAL SPECIFICATION

- CERTIFICATION**
 Manufactured and tested to EN 442. Carries the BS Kitemark and CE Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- ACCESSORIES**
 Please see page 144.
- SYSTEM**
 2 pipe pumped indirect domestic and commercial heating applications.
- CONNECTIONS**
 2 x 1/2" BSP as standard.
- AIR VENTS**
 Integrated.
- GUARANTEE**
 10 year guarantee from date of purchase against manufacturing defects.
- OPERATING PRESSURES**
 Tested to a pressure of 6.9 bar. Working pressure of up to 5.3 bar.
- COLOUR**
 Frame finished in chrome. Radiator in white (RAL 9016).
- DELIVERY**
 2 - 5 working days.
- VALVES**
 Please see page 144.
- MATERIAL**
 Frame manufactured from brass. Radiator manufactured from steel.

For more general information, please see page 276.

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C	
			Watts	Btu/h	Watts	Btu/h
RPW1	934	622	290	989	156	532
RPW2	934	777	359	1225	193	659