



Pegler Yorkshire

Follow us on



UK ENQUIRIES

UK SALES
Free Phone: 0800 156 0010
Free Fax: 0808 156 1011
Email: uk.sales@pegler-yorkshire.co.uk

TECHNICAL HELP
Free Phone: 0800 156 0050
Free Fax: 0808 156 1012
Email: tech.help@pegler-yorkshire.co.uk

BROCHURE HOTLINE
Free Phone: 0800 156 0020
Free Fax: 0808 156 1011
Email: info@pegler-yorkshire.co.uk

INTERNATIONAL ENQUIRIES

EXPORT
Tel: +44 (0) 1302 855 656
Fax: +44 (0) 1302 730 513
Email: export@pegler-yorkshire.co.uk

HEAD OFFICE

Pegler Yorkshire Group Limited
St. Catherine's Avenue, Doncaster,
South Yorkshire DN4 8DF, England
Tel: +44 (0) 1302 560 560
Fax: +44 (0) 1302 560 203
Email: info@pegler-yorkshire.co.uk
www.pegler-yorkshire.co.uk

CONNECT + CONTROL

Tectite
XPress
Henco
Terrier
Meibes
Ballorex
Pegler
Prestex
Yorkshire
Endex
Kuterlite
Francis Pegler
Performa

Registered in England Company No. 00401507
Registered Office: Haigh Park Road, Stourton,
Leeds, West Yorkshire, LS10 1RT England
All brand names and logo styles are registered
trademarks. Maintaining a policy of continual
product development, Pegler Yorkshire reserves
the right to change specifications, design and
materials of products listed in this publication
without prior notice


LIT.REF: ???????????



CONNECT + CONTROL



Pegler Yorkshire

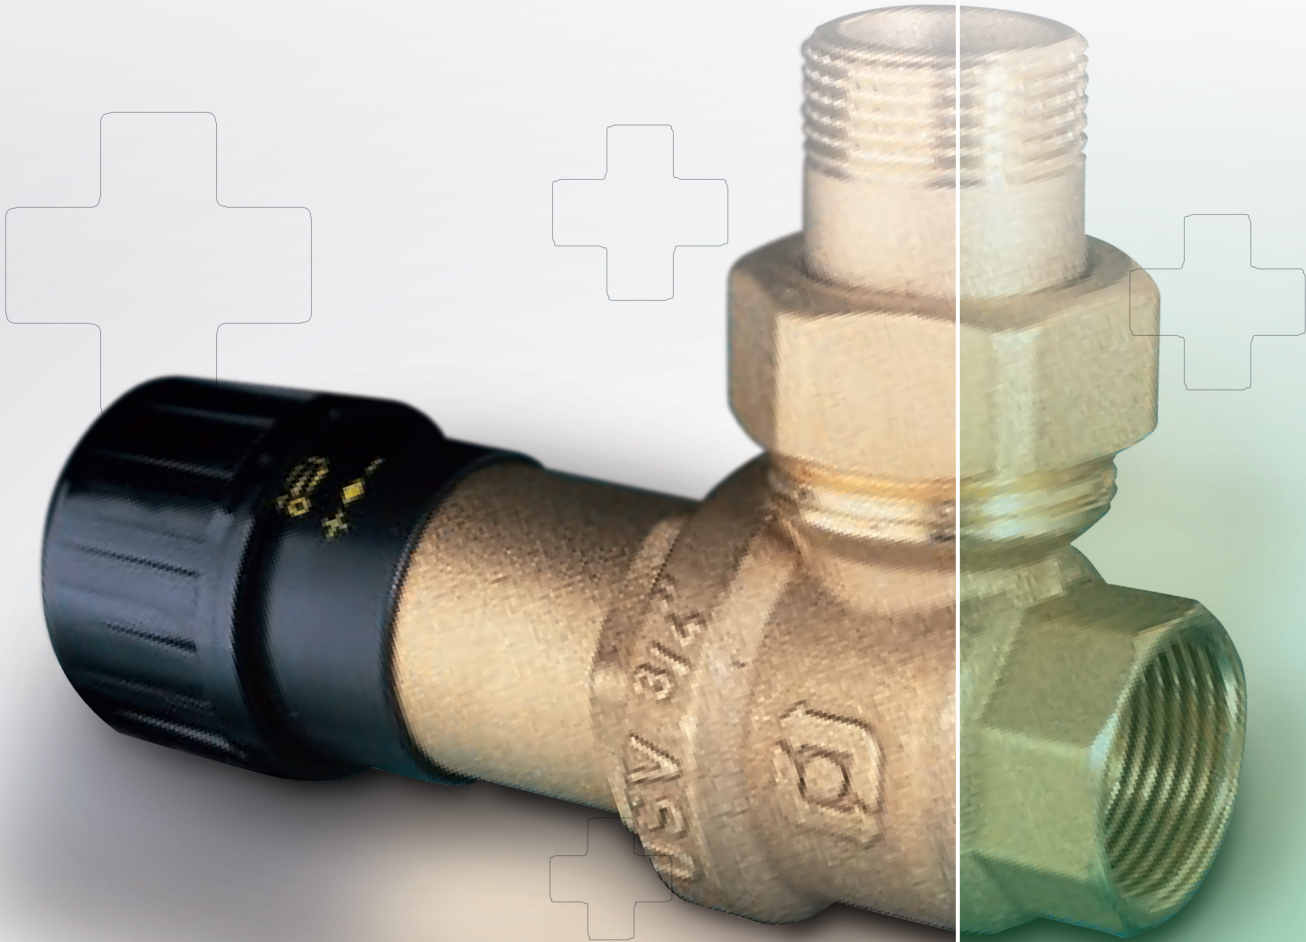

DIFFERENTIAL PRESSURE
VALVES

PUTTING YOU IN CONTROL

Pegler



PEGLER DIFFERENTIAL VALVES

Prevents unnecessary increases in circulating pressure when thermostatic or motorised valves close, leading to system or valve noise. Also allows water flow for pump overrun in place of a fixed bypass only when required.

As recommended for compliance with Building Regulations Part L1 and L2. Available in 3 sizes from 3/4" up to 1 1/4", the Pegler DPV is intended for domestic to light commercial applications.

SPECIFICATION


- ✚ Small proportional deviation
- ✚ Maximum response accuracy due to calibrated high tensile spring
- ✚ Low friction
- ✚ Directly readable adjustment
- ✚ Excellent flow characteristics
- ✚ Gunmetal
- ✚ Setting range 50-500 mbar
- ✚ Max operating temperature 100°C
- ✚ Min operating temperature 1°C
- ✚ Max operating pressure 6 bar

PRODUCT RANGE




Description	Size	Order code
Pegler Differential Pressure Valve	3/4"	678022
Pegler Differential Pressure Valve	1"	678023
Pegler Differential Pressure Valve	1 1/4"	678024

Dimensions (mm)					
SIZE	D1 ("F)	D1 ("M)	L	H	h
3/4"	3/4"	3/4"	70	120	26
1"	1"	1"	83.5	138	33
1 1/4"	1 1/4"	1 1/4"	100	148	39


678022

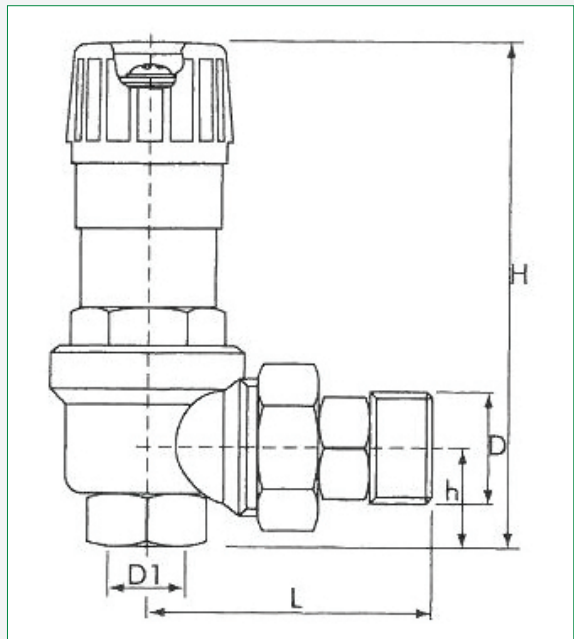

SETTINGS AND FLOW

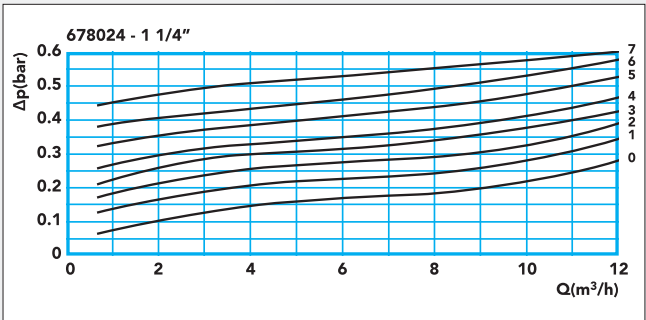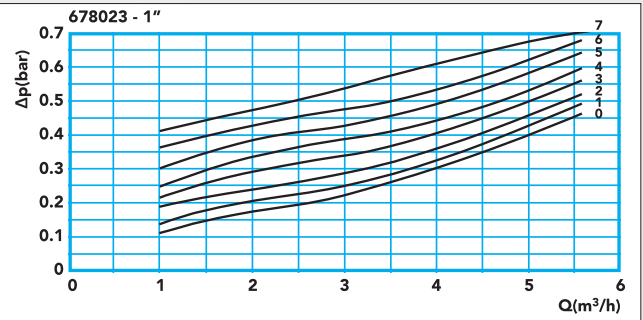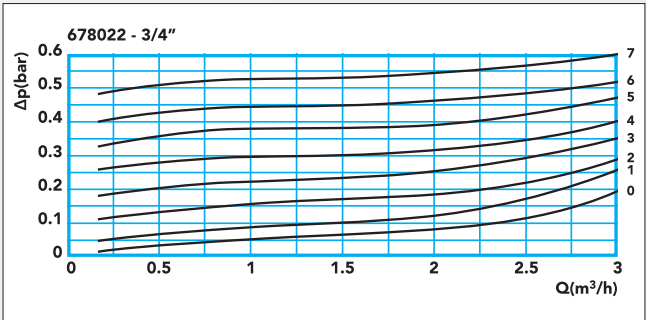

APPLICATIONS (Commercial)

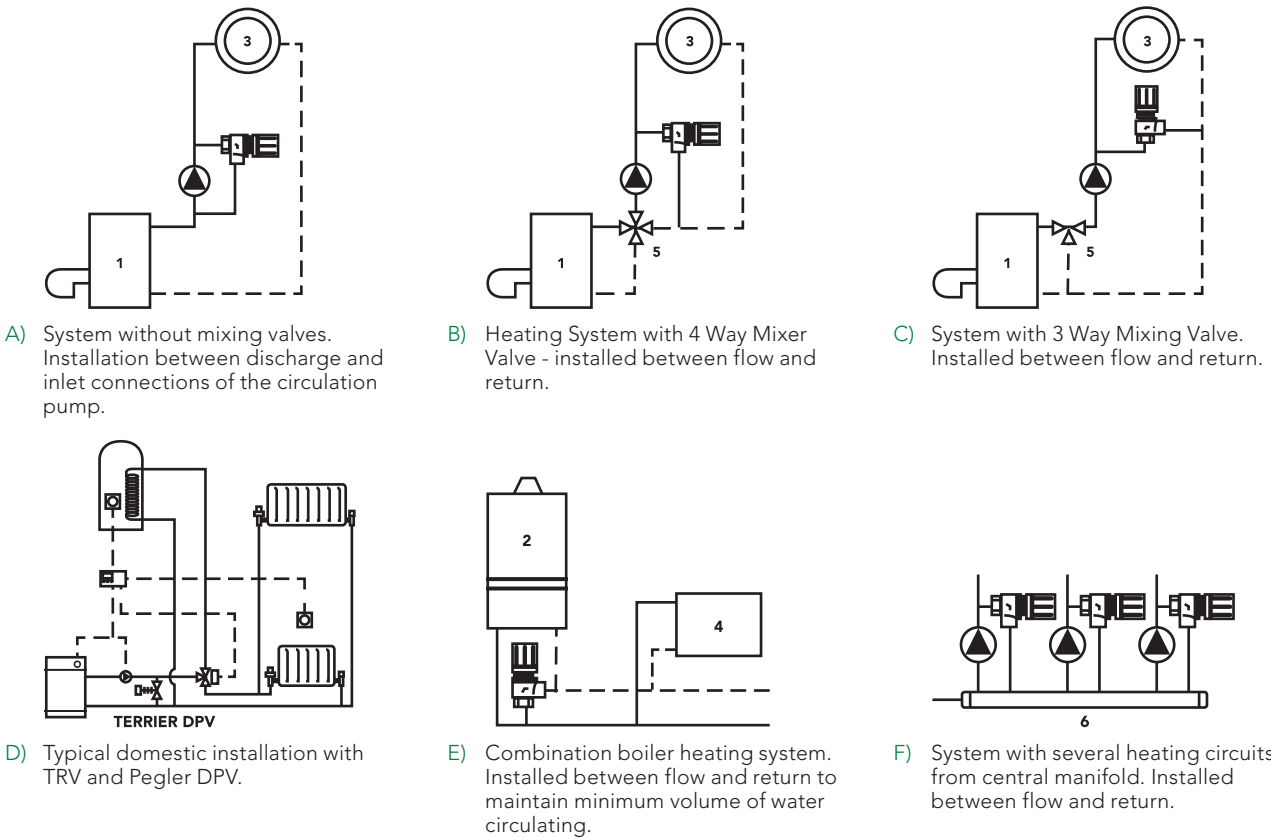

- KEY 1 Oil/Gas Boiler 2 Water/Heater 3 Heating Circuit 4 Radiator 5 2, 3 or 4 Way Valves 6 Manifold Distributor