

# RIVERSTONE

GLAZED PORCELAIN | FLOOR AND WALL TILES

STONE EFFECT TILES

SELECT



JOHNSON • TILES  
Since 1901

f t i p in y

[www.johnson-tiles.com](http://www.johnson-tiles.com)



# RIVERSTONE

Riverstone exhibits a stone effect look with a stunning structured finish that creates a realistic rock texture.

Available in four elegant, neutral shades of White, Beige, Light Grey and Black, Riverstone offers sizes from 200x200mm to 900x450mm for both wall and floor applications. This range offers the complete package with co-ordinating mosaics and skirtings available in all four colours to elevate the look to the next level.







## Colours & Product Codes

V3: Moderate to High Shade Variation



**WHITE** ROCK STRUCTURE

(N) RVN01S PEI: IV LRV: 55




**BEIGE** ROCK STRUCTURE

(N) RVN02S PEI: III LRV: 55




**LIGHT GREY** ROCK STRUCTURE

(N) RVN03S PEI: III LRV: 22

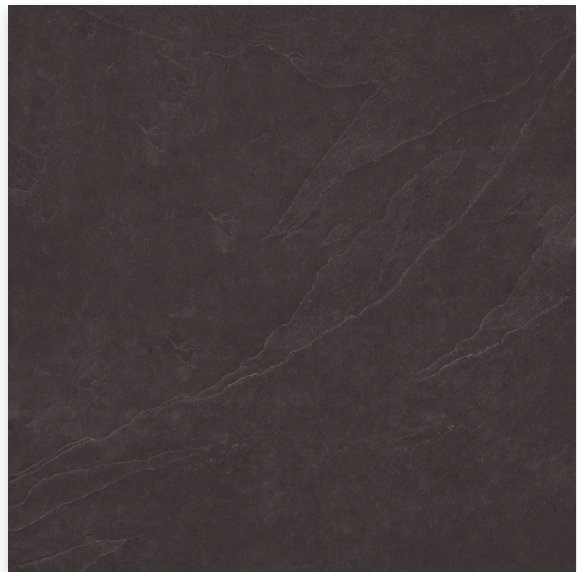


**BLACK** ROCK STRUCTURE

(N) RVN04S PEI: III LRV: 11

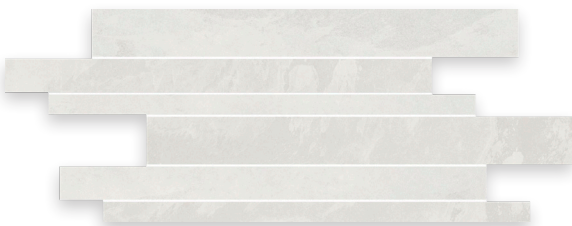

**WHITE** ROCK STRUCTURE

(N) RVN1SM PEI: IV LRV: 55

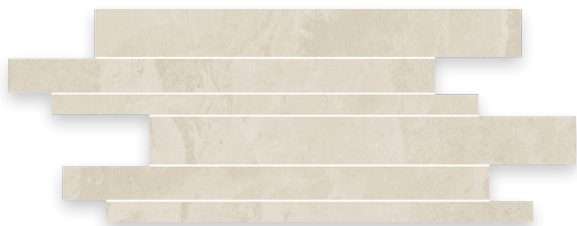


**BEIGE** ROCK STRUCTURE

(N) RVN2SM PEI: III LRV: 55



**LIGHT GREY ROCK STRUCTURE**

(N) RVN3SM PEI: III LRV: 22

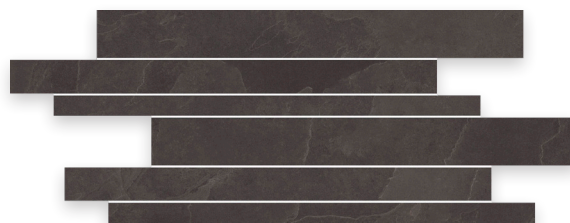

**BLACK ROCK STRUCTURE**

(N) RVN4SM PEI: III LRV: 11




**WHITE ROCK STRUCTURE**

(N) RVN1SM PEI: IV LRV: 55




**BEIGE ROCK STRUCTURE**

(N) RVN2SM PEI: III LRV: 55



**LIGHT GREY ROCK STRUCTURE**

(N) RVN3SM PEI: III LRV: 22




**BLACK ROCK STRUCTURE**

(N) RVN4SM PEI: III LRV: 11



## Sizes, Finishes & Availability

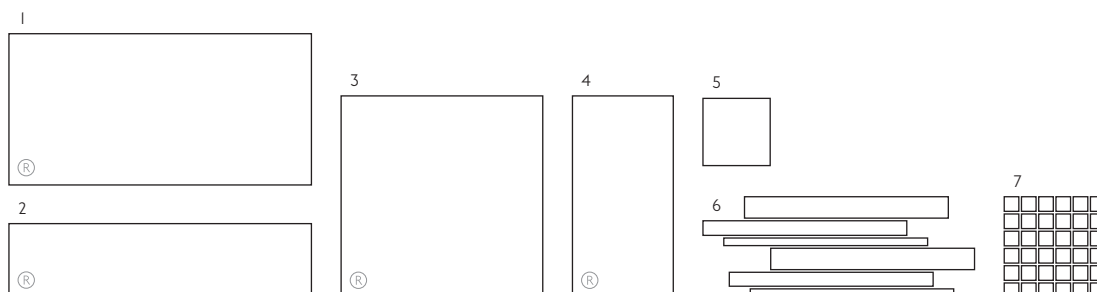

#	Size	Finish	Colour Availability	Thickness	Pieces/Box	Coverage/Box	Weight/Box
1	900x450mm Rock Structure	(N) Natural	All Colours Shown	12mm	2 Tiles	0.81 m <sup>2</sup>	17.72 kg
2	900x220mm Rock Structure	(N) Natural	All Colours Shown	10mm	5 Tiles	0.99 m <sup>2</sup>	21.67 kg
3	600x600mm Rock Structure	(N) Natural	All Colours Shown	10mm	3 Tiles	1.08 m <sup>2</sup>	23.20 kg
4	600x300mm Rock Structure	(N) Natural	All Colours Shown	8.5mm	7 Tiles	1.26 m <sup>2</sup>	22.60 kg
5	200x200mm Rock Structure	(N) Natural	All Colours Shown	6.5mm	25 Tiles	1.00 m <sup>2</sup>	13.70 kg
6	600x300mm Strip Mosaic	(N) Natural	All Colours Shown	8.5mm	5 Tiles	0.90 m <sup>2</sup>	16.00 kg
7	300x300mm Square Mosaic	(N) Natural	All Colours Shown	8.5mm	11 Tiles	0.99 m <sup>2</sup>	18.00 kg

**Note:** All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. All LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value. (R) Rectified Edge






### Additional Fittings

V3: Moderate to High Shade Variation




**WHITE ROCK STRUCTURE**

(N) RVN1SS LRV: 55




**BEIGE ROCK STRUCTURE**

(N) RVN2SS LRV: 55




**LIGHT GREY ROCK STRUCTURE**

(N) RVN3SS LRV: 22



**BLACK ROCK STRUCTURE**

(N) RVN4SS LRV: 11



#	Size	Finish	Colour Availability	Thickness	Pieces/Box	Coverage/Box	Weight/Box
1	600x80mm Round Top Skirting	(N) Natural	All Colours Shown	10mm	6 Tiles	3.60 lm	6.00 kg
2	450x80mm Round Top Skirting	(N) Natural	All Colours Shown	10mm	11 Tiles	4.95 lm	11.00 kg

**Note:** All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. All LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value.



BLACK ROCK STRUCTURE NATURAL 600x600MM - RVN04S



## Technical Data

### Specification

Range	Size	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
Riverstone	All Sizes Shown	Internal & External	Internal Only	-	V3	Glazed Porcelain [Bla]

### Floor Values

Finish	Colour	Pendulum Test Value	R Value	Wet Ramp	PEI	Traffic
Structured	White	Dry 36+ Wet 36+	R10	-	IV	Commercial
Structured	Beige	Dry 36+ Wet 36+	R10	-	III	Light Commercial
Structured	Light Grey & Black	Dry 36+ Wet 25 - 35	R10	-	III	Light Commercial

**Note:** Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. Given this, please refer to our website for the most up-to-date information.

### Physical Properties

Test/Standard	Requirement	Test Result	Test/Standard	Requirement	Test Result
<b>Length / Width</b> EN ISO 10545 - 2	$\pm 0.6\% \leq \pm 2\text{mm}$	$\pm 0.4\%$	<b>Modulus of Rupture</b> EN ISO 10545 - 4	Min. 35N / mm <sup>2</sup>	$\geq 35\text{N} / \text{mm}^2$
<b>Thickness</b> EN ISO 10545 - 2	$\pm 5\% \leq \pm 0.5\text{mm}$	Pass	<b>Thermal Shock</b> EN ISO 10545 - 9	Pass	Pass
<b>Straightness of Side</b> EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 1.5\text{mm}$	$\pm 0.4\%$	<b>Frost Resistance</b> EN ISO 10545 - 12	Resistant	Resistant
<b>Rectangularity</b> EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\pm 0.3\%$	<b>Chemical Resistance</b> EN ISO 10545 - 13	Min. Class B	Class A
<b>Surface Flatness</b> EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 0.5\text{mm}$	$\pm 0.2\%$	<b>Stain Resistance</b> EN ISO 10545 - 14	Min. Class 3	Class 4 - 5
<b>Water Absorption</b> EN ISO 10545 - 3	$\leq 0.5\%$	$\leq 0.1\%$	<b>Fire Rating</b>	-	Class A1 fl Non Combustible
<b>Weight / M<sup>2</sup></b>	<b>21.89 kg</b> 12mm thick	<b>21.49 kg</b> 10mm thick	<b>17.94 kg</b> 8.5mm thick	<b>13.70 kg</b> 6.5mm thick	

**Note:** All products are classed as Bla - Glazed Porcelain. All products conform to BS EN 14411.

### Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed below.

- All sizes shown are metric modular.
- For specific suitability and fit-for-purpose details please contact our technical helpline.
- Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specifications and availability without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

© Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2021 Johnson Tiles. All rights reserved.



For more information about Riverstone or  
any of our other product ranges simply visit  
**www.johnson-tiles.com** |      

#### Where To Find Us

##### Johnson Tiles

Harewood Street,  
Tunstall,  
Stoke on Trent,  
Staffordshire,  
ST6 5JZ

Tel: +44 (0)1782 575 575  
Fax: +44 (0)1782 577 377  
Email: [info@johnson-tiles.com](mailto:info@johnson-tiles.com)

##### Samples Enquiries

Tel: +44 (0)1782 524 043  
Fax: +44 (0)1782 577 379  
Email: [samples@johnson-tiles.com](mailto:samples@johnson-tiles.com)

##### Technical Helpline

Tel: +44 (0)1782 524 111  
Fax: +44 (0)1782 577 379  
Email: [techadvice@johnson-tiles.com](mailto:techadvice@johnson-tiles.com)

**JOHNSON • TILES**  
Since 1901