

GLIDE

⑤ SELECT COLLECTION

GLAZED CERAMIC AND PORCELAIN | WALL AND FLOOR TILES



JOHNSON • TILES
Since 1901



www.johnson-tiles.com

GLIDE

With the calming, neutral tone of pure white threaded with the gentle veining of carrara marble, Glide proves that simplicity can still make a big impact. Understated and elegant, Glide showcases calm serenity with a timeless finish, expanding the limits of any space with an airy, light, bright feel.

With the linear structured décor options providing textural definition, this range delivers clean, sleek looks, bringing sophistication and style to any setting.



WHITE CARRARA MATT 600x600MM - GLD01N



WHITE CARRARA MATT 600x300MM - GLD01A
WHITE CARRARA LINEAR STRUCTURE MATT 600x300MM - GLD01D



Colours & Product Codes

VI: Low Shade Variation



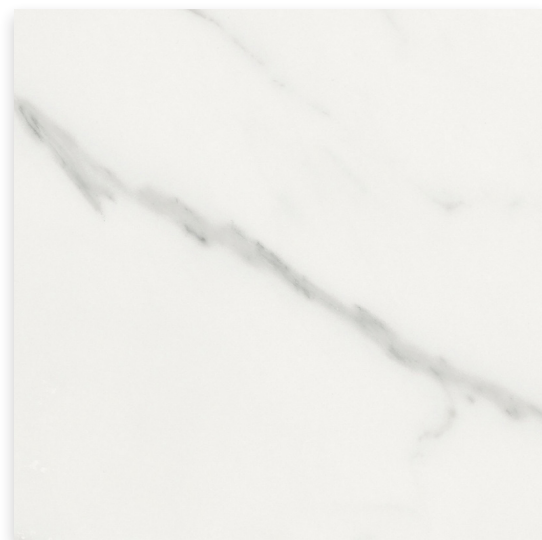
WHITE CARRARA

(M) GLD01A LRV: 64
(G) GLD02A LRV: 72



WHITE CARRARA LINEAR STRUCTURE

(M) GLD01D LRV: 64
(G) GLD02D LRV: 72

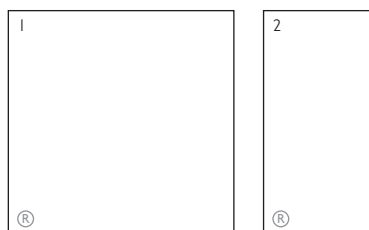


WHITE CARRARA

(M) GLD01N PEI: IV LRV: 64
(P) GLD01P PEI: IV LRV: 72



Sizes, Finishes & Availability



#	Size	Finish	Colour Availability	Thickness	Pieces/Box	Coverage/Box	Weight/Box
1	600x600mm	(M) Matt	White Carrara	9.4mm	3 Tiles	1.08m ²	23.00 kg
		(P) Polished	White Carrara	9.4mm	3 Tiles	1.08m ²	23.00 kg
2	600x300mm	(M) Matt	White Carrara	9mm	7 Tiles	1.26m ²	18.50 kg
		(G) Gloss	White Carrara	9mm	7 Tiles	1.26m ²	18.50 kg

Note: All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website.
All LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value. ® Rectified Edge



Technical Data

Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed below.

- All sizes shown are metric modular.
- For specific suitability and fit-for-purpose details please contact our technical helpline.
- Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specifications and availability without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

© Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles.

© 2020 Johnson Tiles. All rights reserved.



Specification

Range	Size	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
Glide	600x300x9mm	Internal Only	N/A	N/A	VI	Glazed Ceramic [BIII]
Glide	600x600x9.4mm	Internal & External	Internal Only	N/A	VI	Glazed Porcelain [BIa]
Glide	600x600x9.4mm	Internal & External	Internal Only	N/A	VI	Glazed Porcelain [BIb]

Floor Values

Finish	Colour	PTV	R Value	Wet Ramp	PEI	Traffic
Matt	White Carrara	Dry 36+ Wet 0 - 24	N/A	N/A	IV	Commercial
Polished	White Carrara	Dry 36+ Wet 0 - 24	N/A	N/A	IV	Commercial

Note: Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. Given this, please refer to our website for the most up-to-date information.
PTV: Pendulum Test Value.

Physical Properties - Glazed Ceramic [BIII]














Test	Standard	Requirement	Typical Test Result
Length / Width	EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass
Thickness	EN ISO 10545 - 2	$\pm 10\% \leq \pm 0.5\text{mm}$	Pass
Straightness of Side	EN ISO 10545 - 2	$\pm 0.3\% \leq \pm 1.5\text{mm}$	Pass
Rectangularity	EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass
Surface Flatness	EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass
Water Absorption	EN ISO 10545 - 3	10% to 20%	Pass
Modulus of Rupture	EN ISO 10545 - 4	Min. 15N / mm ²	Pass
Frost Resistance	EN ISO 10545 - 12	-	Not suitable for areas where temperatures fall below freezing.
Chemical Resistance	EN ISO 10545 - 13	Min. Class B	Pass
Stain Resistance	EN ISO 10545 - 14	Min. Class 3	Pass
Fire Rating	-	-	Class A1 - Non Combustible
kg Weight / Box	18.50 kg [600x300x9mm]		

Note: All products are classed as BIII - Glazed Ceramic. All products conform to BS EN 14411.
















Technical Data

Physical Properties - Glazed Porcelain [Bla]

Test	Standard	Requirement	Typical Test Result
 Length / Width	EN ISO 10545 - 2	$\pm 0.6\% \leq \pm 2\text{mm}$	$\pm 0.1\%$
 Thickness	EN ISO 10545 - 2	$\pm 5\% \leq \pm 0.5\text{mm}$	$\pm 2.5\%$
 Straightness of Side	EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 1.5\text{mm}$	$\pm 0.1\%$
 Rectangularity	EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\pm 0.1\%$
 Surface Flatness	EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 0.5\text{mm}$	$\pm 0.2\%$
 Water Absorption	EN ISO 10545 - 3	$\leq 0.5\%$	$\leq 0.1\%$
 Modulus of Rupture	EN ISO 10545 - 4	Min. 35N / mm ²	$\geq 37\text{N} / \text{mm}^2$
 Thermal Shock	EN ISO 10545 - 9	Pass	Pass
 Frost Resistance	EN ISO 10545 - 12	Resistant	Resistant
 Chemical Resistance	EN ISO 10545 - 13	Min. Class B	Class A
 Stain Resistance	EN ISO 10545 - 14	Min. Class 3	Class 5
 Fire Rating	-	-	Class A I _{FL} - Non Combustible
 Weight / Box	23.00 kg [600x600x9.4mm]		

Note: All products are classed as Bla - Glazed Porcelain. All products conform to BS EN 14411.

Physical Properties - Glazed Porcelain [Bib]

Test	Standard	Requirement	Typical Test Result
 Length / Width	EN ISO 10545 - 2	$\pm 0.6\% \leq \pm 2\text{mm}$	$\pm 0.1\%$
 Thickness	EN ISO 10545 - 2	$\pm 5\% \leq \pm 0.5\text{mm}$	$\pm 2.5\%$
 Straightness of Side	EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 1.5\text{mm}$	$\pm 0.1\%$
 Rectangularity	EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\pm 0.1\%$
 Surface Flatness	EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 0.5\text{mm}$	$\pm 0.2\%$
 Water Absorption	EN ISO 10545 - 3	$\leq 0.5\%$	$\leq 0.016\%$
 Modulus of Rupture	EN ISO 10545 - 4	Min. 30N / mm ²	$\geq 43\text{N} / \text{mm}^2$
 Thermal Shock	EN ISO 10545 - 9	Pass	Pass
 Frost Resistance	EN ISO 10545 - 12	Resistant	Resistant
 Chemical Resistance	EN ISO 10545 - 13	Min. Class B	Class A
 Stain Resistance	EN ISO 10545 - 14	Min. Class 3	Class 5
 Fire Rating	-	-	Class A I _{FL} - Non Combustible
 Weight / Box	23.00 kg [600x600x9.4mm]		

Note: All products are classed as Bib - Glazed Porcelain. All products conform to BS EN 14411.

For more information about Glide or any
of our other product ranges simply visit
www.johnson-tiles.com |      

Where To Find Us

Johnson Tiles

Harewood Street,
Tunstall,
Stoke on Trent,
Staffordshire,
ST6 5JZ

Tel: +44 (0)1782 575 575
Fax: +44 (0)1782 577 377
Email: info@johnson-tiles.com

Samples Enquiries

Tel: +44 (0)1782 524 043
Fax: +44 (0)1782 577 379
Email: samples@johnson-tiles.com

Technical Helpline

Tel: +44 (0)1782 524 111
Fax: +44 (0)1782 577 379
Email: techadvice@johnson-tiles.com

JOHNSON • TILES
Since 1901