


① Intro Collection

CITY TOUCHSTONE

GLAZED CERAMIC & PORCELAIN
WALL & FLOOR TILES

🌀 Six Colours 📐 Three Sizes 🧩 Two Finishes

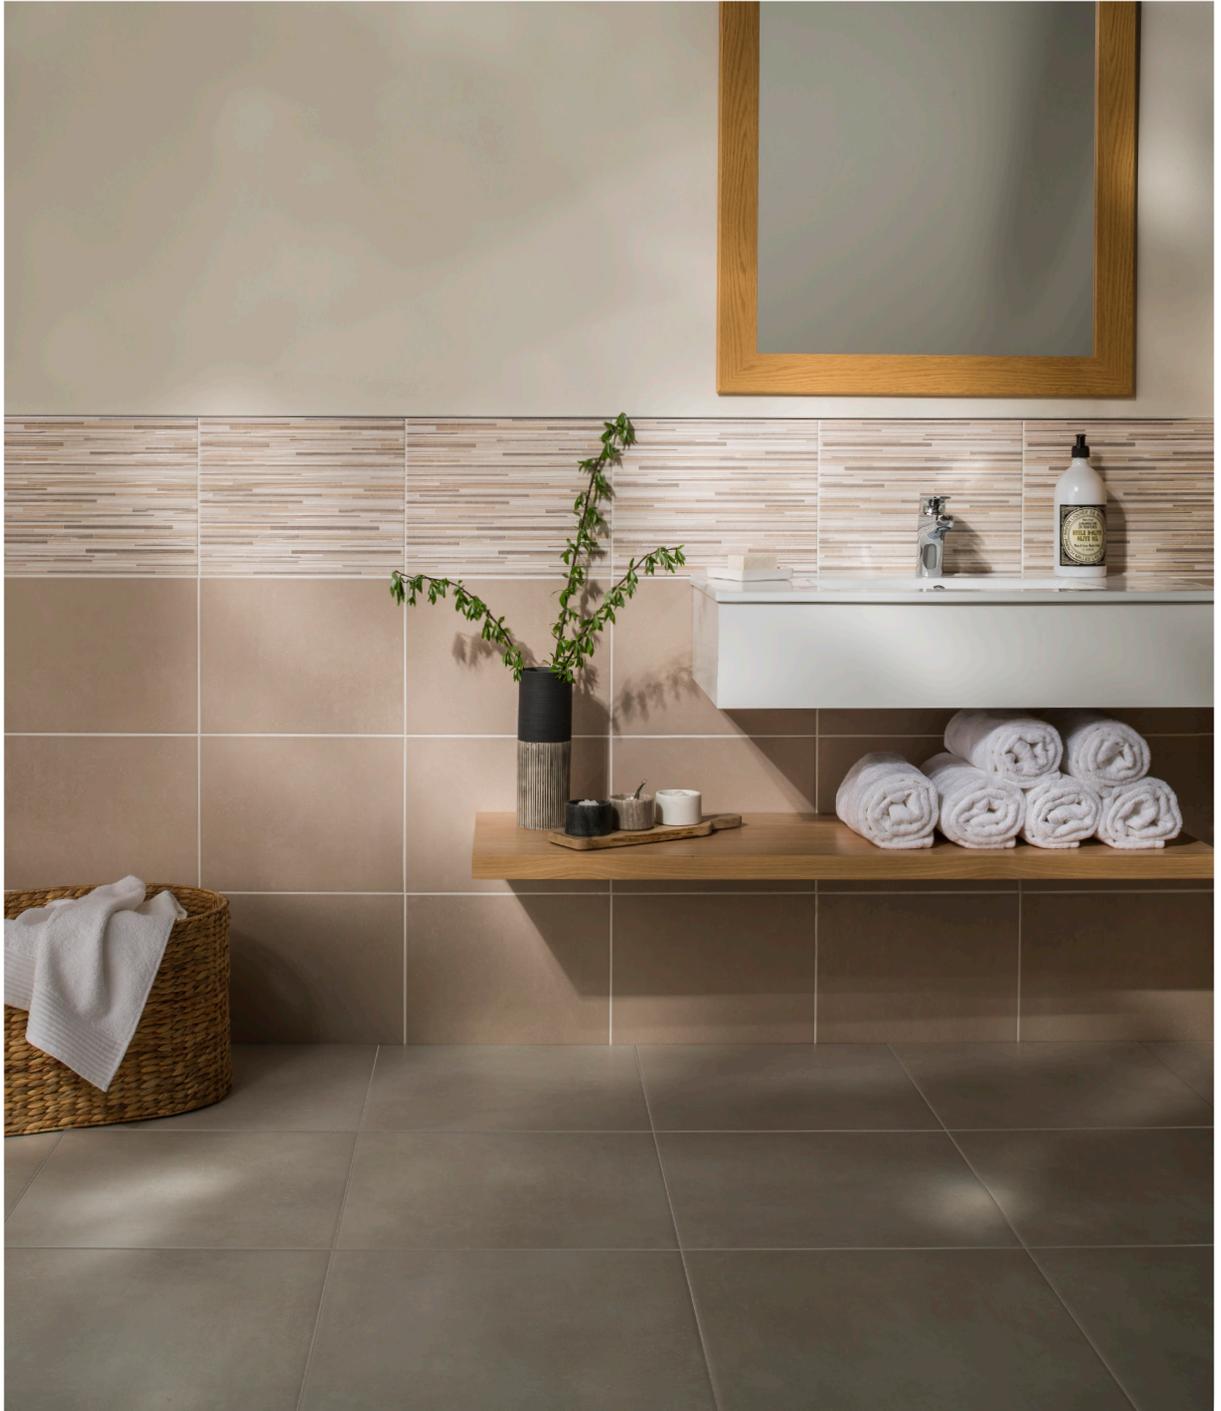

www.johnson-tiles.com





JOHNSON • TILES

Since 1901

City Touchstone is a contemporary range of glazed ceramic and porcelain wall and floor tiles. Choose from four muted tones and two co-ordinating structured featured tiles. Each tonal colour within the **City Touchstone** range combines perfectly, allowing for endless creative possibilities within any interior space.

Three Size Formats

Available Sizes:



450x450mm
8.2mm thick

600x600mm
9.3mm thick

Two Finishes

Available Finishes:

M Matt Finish

S Matt Structure Finish

N.B For full details on suitability, or advice on technical issues please contact our technical helpline.

N.B


360x275mm products in this range are classed as Glazed Ceramic [BIII]. All other products are classed as Glazed Porcelain [BIIa].

For further suitability information, please see page 04.



Six Colour Options


Available Colours:

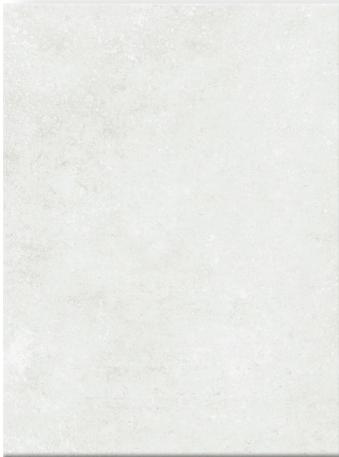

▲ White



▲ Beige

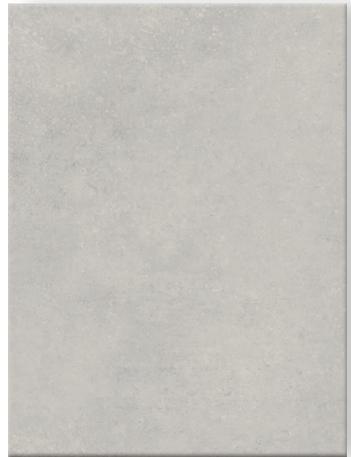

▲ Light Grey



▲ Mid Grey



▲ Beige Mix



▲ Grey Mix

Availability



Size	Finish	White	Beige	Light Grey	Mid Grey
360x275x8mm	 Matt Finish	CTO1A	CTO2A	CTO3A	CTO4A
450x450x8.2mm	 Matt Finish	CTO1F	CTO2F	CTO3F	CTO4F
600x600x9.3mm	 Matt Finish	CTO1F	CTO2F	CTO3F	CTO4F



Size	Finish	Beige Mix	Grey Mix
360x275x8mm	 Matt Structure Finish	CTO1L	CTO2L

N.B For the most up-to-date availability information, please visit our website - www.johnson-tiles.com

Technical Information

Specification

Size	Wall Usage	Floor Usage	CSV	Material
360x275x8mm	Internal	-	V2	Glazed Ceramic [BIII]
450x450x8.2mm	Internal & External	Internal	V2	Glazed Porcelain [Bla]
600x600x9.3mm	Internal & External	Internal	V2	Glazed Porcelain [Bla]

Floor Values - Matt Finish

Colour	Pendulum 4S	R Value	Wet Ramp	Wet Barefoot	PEI	Traffic
White	Dry 36+ Wet 25 - 35	-	-	-	IV	Commercial
All Other Colours	Dry 36+ Wet 25 - 35	-	-	-	III	Light Commercial

N.B Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. Given this, please refer to our website or call our technical helpline for the most up-to-date information.

Colour Notations

Colour	Code	NCS	LRV
Beige	CTO2A / 2F	3005-Y20R	42
Light Grey	CTO3A / 3F	3502-Y	38
Mid Grey	CTO4A / 4F	5005-Y80R	24
White	CTO1A / 1F	2002-Y50R	55

N.B These results are from Johnson Tiles' internal test reports and are to be used for guidance only. NCS: Natural Colour System. LRV: Light Reflectance Value (Reflectance Y).

Due to the colour variation of CTO1L Beige Mix and CTO2L Grey Mix, accurate Light Reflectance values and Colour Notations cannot be calculated. For further information, please contact our Technical Helpline.



City Touchstone Beige

Physical Properties - Glazed Ceramic

Test	Standard	Requirements	Typical Test Result
 Length / Width	EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\pm 0.25\%$
 Thickness	EN ISO 10545 - 2	$\pm 10\% \leq \pm 0.5\text{mm}$	$\pm 2.5\%$
 Straightness of Side	EN ISO 10545 - 2	$\pm 0.3\% \leq \pm 1.5\text{mm}$	$\pm 0.15\%$
 Rectangularity	EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\pm 0.4\%$
 Surface Flatness	EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\pm 0.2\%$
 Water Absorption	EN ISO 10545 - 3	10% to 20%	15% to 17%
 Modulus of Rupture	EN ISO 10545 - 4	Min 15N / mm ²	> 25N / mm ²
 Thermal Shock	EN ISO 10545 - 9	Pass	Pass
 Frost Resistance	EN ISO 10545 - 12		Not suitable for installations where temperatures may fall below freezing.
 Chemical Resistance	EN ISO 10545 - 13	Min Class B	Class A - B
 Stain Resistance	EN ISO 10545 - 14	Min Class 3	Class 3
 Fire Rating			Class AI Non Combustible
 UV Colour Resistance			Unaffected by Light
 Weight / m ²			14.2kg (360x275x8mm)

N.B Classed as BIII products (Glazed Ceramic). All products conform to BS EN 14411.

Physical Properties - Glazed Porcelain

Test	Standard	Requirements	Typical Test Result
 Length / Width	EN ISO 10545 - 2	$\pm 0.6\% \leq \pm 2\text{mm}$	$\pm 0.4\%$
 Thickness	EN ISO 10545 - 2	$\pm 5\% \leq \pm 0.5\text{mm}$	$\pm 0.9\%$
 Straightness of Side	EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 1.5\text{mm}$	$\pm 0.2\%$
 Rectangularity	EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\pm 0.4\%$
 Surface Flatness	EN ISO 10545 - 2	$\pm 5\% \leq \pm 0.5\text{mm}$	$\pm 0.4\%$
 Water Absorption	EN ISO 10545 - 3	$\leq 0.5\%$	$\leq 0.5\%$
 Modulus of Rupture	EN ISO 10545 - 4	Min 35N / mm ²	$\geq 37\text{N} / \text{mm}^2$
 Thermal Shock	EN ISO 10545 - 9	Pass	Pass
 Frost Resistance	EN ISO 10545 - 12	Resistant	Resistant
 Chemical Resistance	EN ISO 10545 - 13	Min Class B	Class B
 Stain Resistance	EN ISO 10545 - 14	Min Class 3	Class 3
 Fire Rating			Class A _{FL} Non Combustible
 UV Colour Resistance			Unaffected by Light
 Weight / m ²			18.3kg (450x450x8.2mm) 19.2kg (600x600x9.3mm)

N.B Classed as BIa products (Glazed Porcelain). All products conform to BS EN 14411.

Detailed information on specification, floor values, colour notations and physical properties.

Colour Shade Variation

Colour Shade Variation (CSV) values are assigned to wall and floor tiles within this booklet. These values are to be used for guidance only. Shade, colour and pattern variation are inherent characteristics of all ceramic, vitrified and porcelain tiles. Before fixing, several cartons should be opened and their contents mixed to ensure that the shade variation and/or patterning are acceptable. CSV: Colour Shade Variation is split into four categories:

V1 (Low Shade Variation)



Least possible shade variation between tiles in a box. When installed and mixed correctly the effect is a consistent overall appearance.

V2 (Low to Moderate Shade Variation)



Low to moderate shade variation within a box. When installed and mixed correctly the effect is a finish with subtle shade differences. These differences are a design feature of V2 rated tiles.

V3 (Moderate to High Shade Variation)



Considerable shade variation within a box. When installed and mixed correctly the effect is a finish with a high degree of shade variation. These differences are a design feature of V3 rated tiles.

V4 (High Shade Variation)



Highest possible shade variation within a box. Colours vary from tile to tile and when mixed and fixed correctly create a high degree of shade variation. This high shade variation is a design feature of V4 rated tiles.

Pendulum 4S Results

The standard and preferred Health and Safety Executive (HSE) test method for the assessment of floor slipperiness in dry and contaminated conditions. This portable test can be used to test floor products in the laboratory or in-situ and uses a swinging test apparatus, which simulates the act of walking over the flooring materials.

The 4S Slider 96 (Pendulum 4S) replicates typical shod trafficking. Products are tested dry and with a water lubricant and are then classed into one of the following three groups as an indication of their suitability:

0 - 24 (High Slip Potential)

25 - 35 (Moderate Slip Potential)

36+ (Low Slip Potential)

R Values

Ramp test DIN51130 (R Value) is used to assess floor materials for wet shod foot trafficked areas. R Values are split into five categories:

R9 (6° to 10°)

Entrances and stairways accessed from outside, restaurants, shops, hospitals, clinic, schools etc.

R10 (10° to 19°)

Shared toilets and showers, small kitchens in restaurants and cafés, garages and basements etc.

R11 (19° to 27°)

Food production facilities; mid sized kitchens in restaurants and cafés, working environments where there is a lot of water, laboratories, laundries, hangars etc.

R12 (27° to 35°)

Production facilities for foods rich in fats; such as dairy products, food oils and cured meats, large kitchens in restaurants and cafés, industrial areas where slippery substances are used etc.

R13 (>35°)

Areas where large quantities of fats are used; food processing areas etc.

Wet Ramp

Ramp test DIN51097 (Wet Ramp) is used to assess floor materials for wet barefoot conditions. Wet ramp results are split into three categories:

Class A (12° to 17°)

Dry areas including dry changing room areas, dry barefoot corridors etc.

Class B (18° to 23°)

Same as Class A with the addition of swimming pool surrounds, communal showers, pool beach areas, disinfectant spray areas, wet changing room areas etc.

Class C (>23°)

Same as Class A and Class B with the addition of swimming pool surround inclines, walk through pools, jacuzzi floors and seats, inclined pool edges and steps etc.

PEI Ratings and Traffic

Porcelain Enamel Institute (PEI) ratings refer to the surface abrasion resistance of a glazed floor tile. The test is only used for glazed tiles - through body porcelain and un-glazed porcelain are tested using the EN ISO 10545-6 Deep Abrasion Test. PEI's are split into five categories:

PEI I (Light Domestic Traffic)

Floors walked on with soft soled footwear with no scratching dirt - for example; residential bathrooms without direct outside access, en-suite bathrooms etc.

PEI II (Domestic Traffic)

Floors walked on with soft soled or normal footwear with occasional small amounts of scratching dirt - for example rooms in living areas of home, but not kitchens.

PEI III (Light Commercial Traffic)

Floors walked on with normal footwear with small amounts of scratching dirt - for example; residential halls, corridors, kitchens or conservatories.

PEI IV (Commercial Traffic)

Floors walked on by regular traffic with the presence of some scratching dirt but more severe than PEI III's - for example; hotels, restaurants and shops without direct external access.

PEI V (Heavy Commercial Traffic)

Floors subject to severe pedestrian traffic over sustained periods with the presence of some scratching dirt - for example; shopping centres, hotel foyers, commercial floors, institutional uses etc.

Light Reflectance Values

LRV is a general term for contrast and is measured as the proportion of useful light reflected by a coloured object, floor, wall or ceiling. LRV is measured on a scale of 0 to 100 where 0 is perfect black and 100 is perfect white.

The current guidelines from Building Regulations Approved Document M on contrast are that a minimum difference of 30 LRV points should be specified for adjacent surfaces to ensure that visually impaired people are not discriminated against.



Colours are noted by the Natural Colour System (NCS).

© Property of and used under the licence from Scandinavian Colour Institute AB, SCI Sweden.se, Stockholm, 2001. See your local NCS distributor for original NCS standard samples.

About Us

Established in 1901, Johnson Tiles are the leading manufacturer of ceramic tiles in the UK. Our experienced design team travels the world to source products to enhance our portfolio. We are also one of the greenest companies in the UK.

With over 100 years of experience, Johnson Tiles has a long history of market leadership. With a dedicated in-house design team and UK based production facilities, Johnson Tiles continues to deliver distinctive new products servicing both the contract and retail markets internationally, all of which is underpinned by our award-winning quality and environmental systems. Within the contract market, our experience, service and product range covers all aspects of public and private specifications, from architects and designers through house builders, contractors and distributors.

Our tiles have been used on both small and large contracts for housing projects, schools, universities, hotels, hospitals, industrial developments and the leisure industry. Within the retail market we design and manufacture products for both independent and multiple retailers. We offer the widest choice of 'on trend' products, backed up by industry-leading logistics and service.

Johnson Tiles is a division of Norcros Group (Holdings) Limited, Ladyfield House, Station Road, Wilmslow, Cheshire, SK9 1BU.

Registered in England No. 566694.

Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade or pattern can occur. Before fixing any tiles, several cartons should be opened and their contents mixed, to ensure that the size, shade, colour and patterning are acceptable. The tiles shown in the booklet are quality products and conform to the physical properties listed in this booklet.

- For specific suitability and fit-for-purpose details, contact our Technical Helpline.
- Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- Every effort has been made to ensure the accuracy of the information given in this booklet.
- In the interest of progress, Johnson Tiles reserves the right to change specifications and availability without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

© Johnson Tiles, Johnson, absolute and Material Lab are registered trademarks, and together with Kerastar and the product names, are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited, trading as Johnson Tiles.

© 2019 Johnson Tiles. All rights reserved.

Printed in England



FM26818



EMS40817



BS EN 14411
No. KM 07325

Uniclass Epic
L512 E223
Cl/SfB [42] Sg3

November 2019

Front Cover Image: City Touchstone Beige and Beige Mix

Where To Find Us

United Kingdom

Johnson Tiles
Harewood Street,
Tunstall,
Stoke on Trent
Staffordshire,
ST6 5JZ

Tel: +44 (0)1782 575 575
Fax: +44 (0)1782 577 377
Email: info@johnson-tiles.com

Material Lab
10 Great Titchfield Street,
London,
W1W 8BB

Tel: +44 (0)20 7436 8629
Fax: +44 (0)20 7436 9031
Email: info@material-lab.co.uk

Middle and Far East

Johnson Tiles Dubai
PO Box - 413617,
United Arab Emirates

Tel: ++971 (0) 526 457 376
Email: sales@johnson-tiles.ae

United States of America

Johnson Tiles USA
3 Cass Street,
Keyport,
New Jersey,
07735, USA

Tel: +1732 264 0202
Fax: +1732 264 0222
Email: usaoffice@johnson-tiles.com

Samples Enquiries

Tel: +44 (0)1782 524 043
Fax: +44 (0)1782 577 379
Email: samples@johnson-tiles.com

Technical Helpline

Tel: +44 (0)1782 524 111
Fax: +44 (0)1782 577 379
Email: techadvice@johnson-tiles.com
