



STUDIO

Glide®

DESIRABLE.

SCALABLE. DURABLE.

STUDIOGLIDE® BI-FOLD DOORS

MINIMAL SIGHT LINES, MAXIMUM PERFORMANCE & FLEXIBILITY

HIGH PERFORMANCE & CONTEMPORARY STYLING THAT LETS MORE OF THE OUTDOORS IN.

The fashion for bi-fold doors shows no sign of slowing down. Why would it, when it offers all that extra natural light the whole year round and the added advantage of throwing open a 'glass wall' to let the outside in during the summer months?

So to give you even more of that bi-fold 'wow' factor we've introduced the StudioGlide® bi-fold system.

ADVANCED DESIGN THAT'S BETTER ALL ROUND.

With so many options and configurations to choose from, StudioGlide® meets your needs exactly. Dual colour and multiple threshold options. Double or triple glazing... the choice is practically limitless.


Not to mention, of course, the improved sight lines, increased door sizes and slimmer profiles that come as standard with this breakthrough bi-fold design.

All easily fabricated and quick to install with a full 10-year guarantee against warping and frame failure for your complete peace of mind.




STUDIO

Glide®

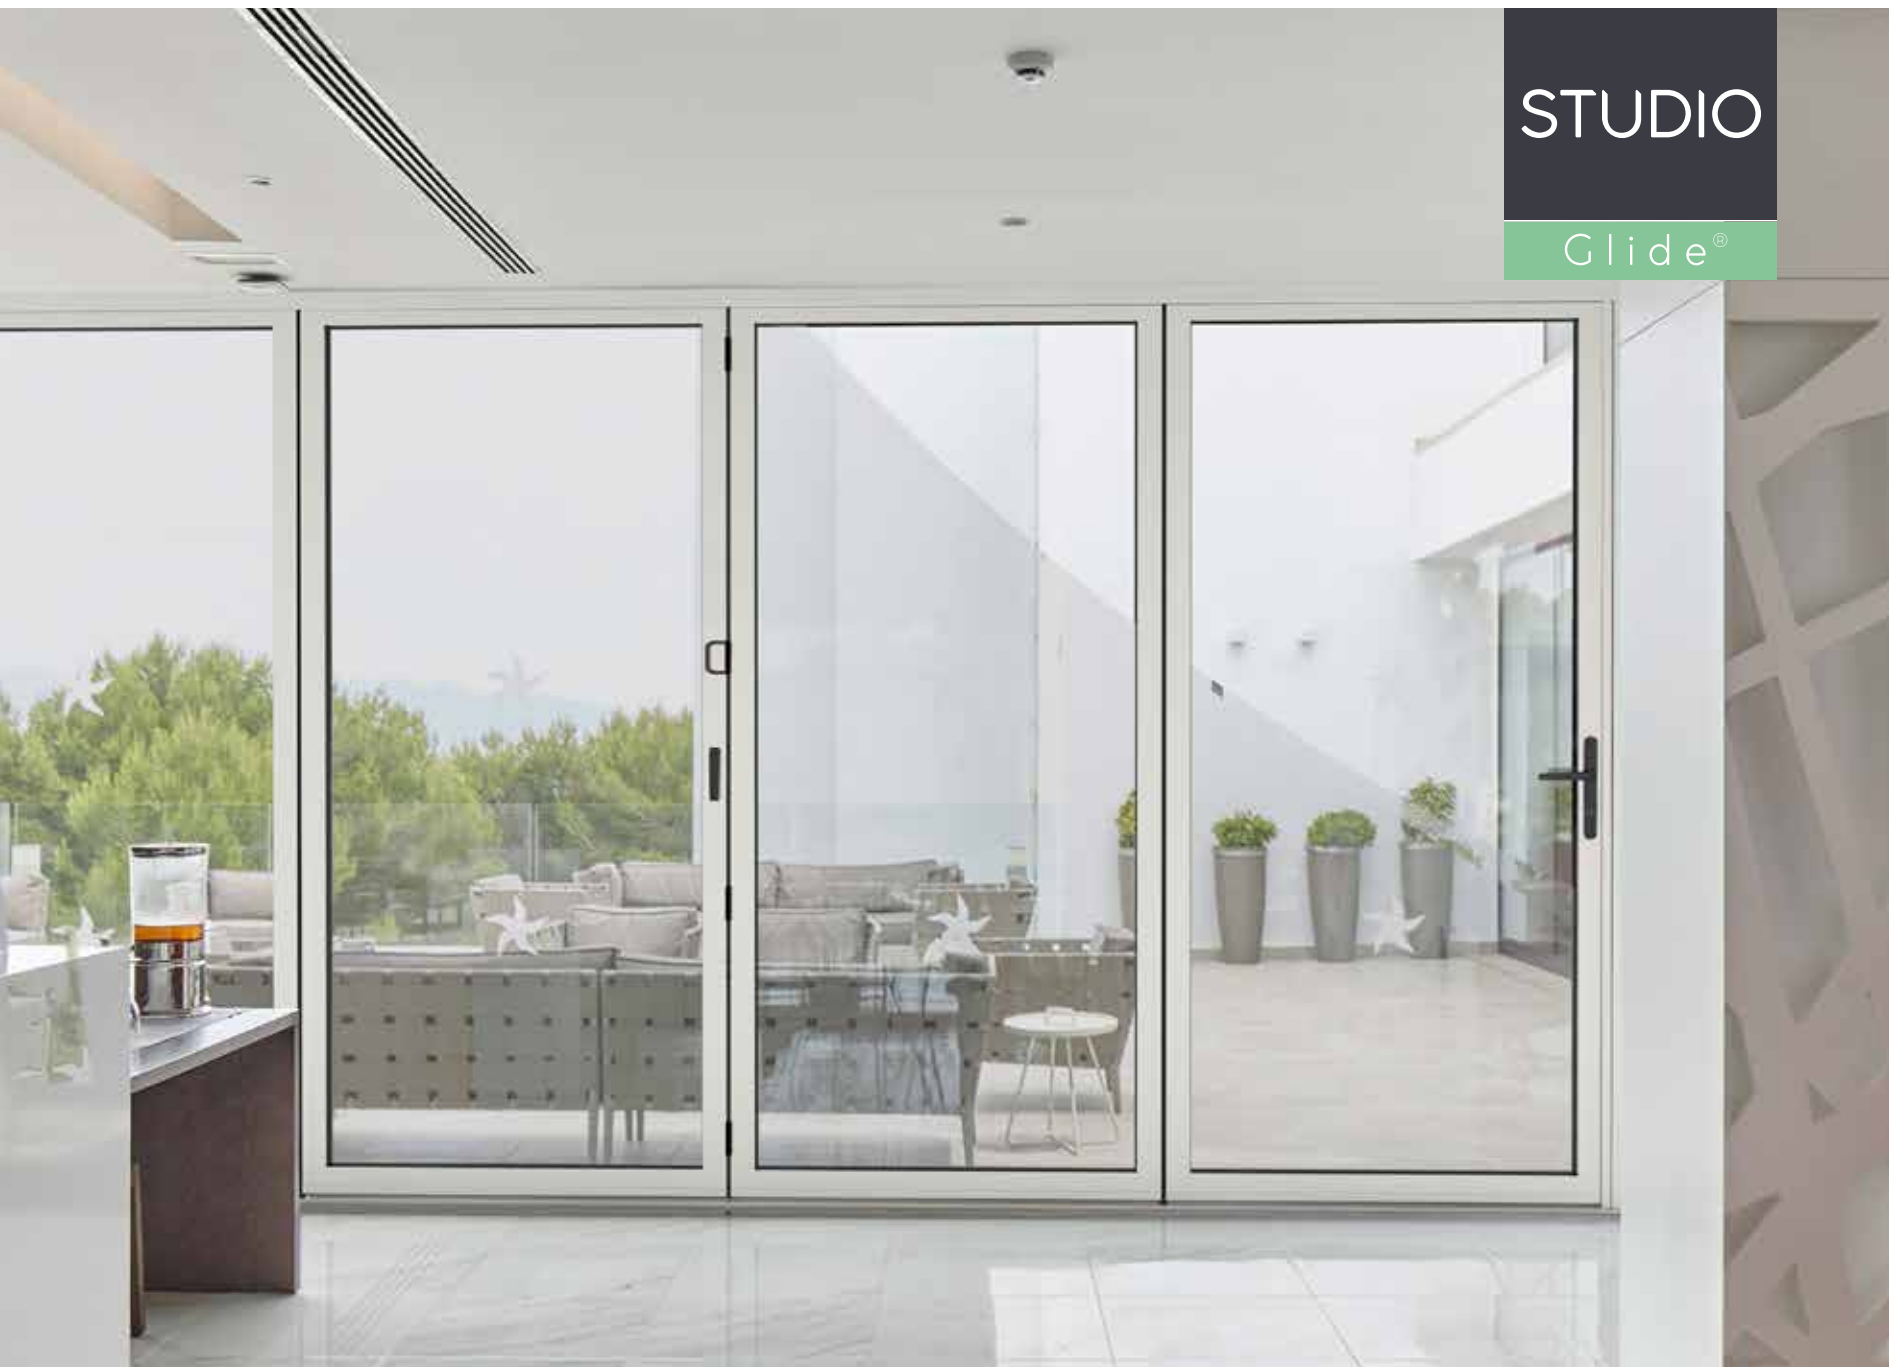


WHY CHOOSE STUDIOGLIDE®?

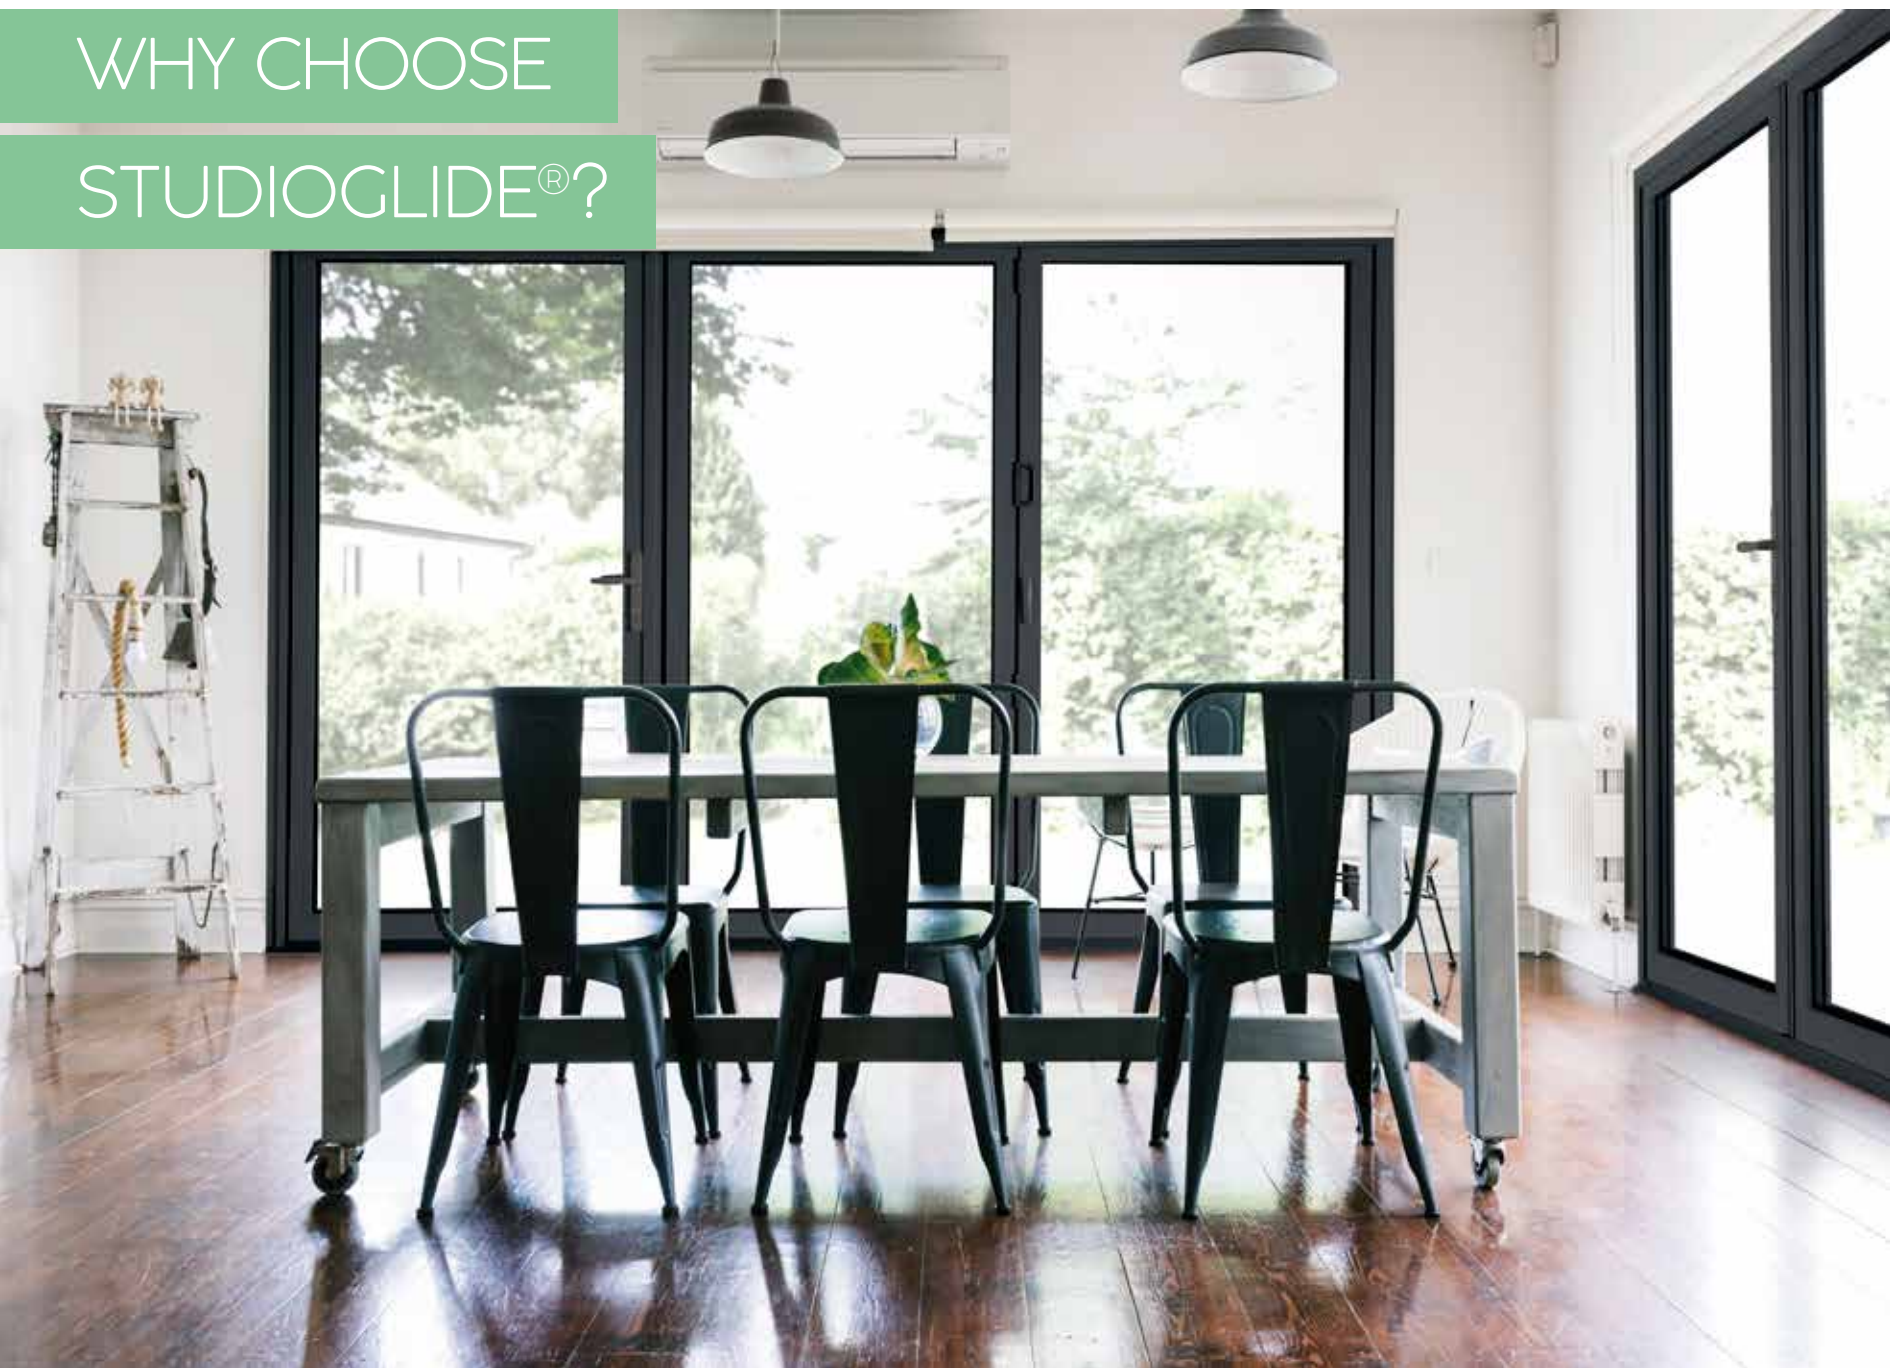




PEACE OF MIND

10-year guarantee.
Tested to BS6375 2015.
PAS 24 accredited for security




ENVIRONMENTAL PERFORMANCE

U-values as low as 1.6W/m²k
for double glazing and
1.3 W/m²k for triple glazing




FAST & ACCURATE

Fast and accurate fabrication
and installation




INCREASED SCALABILITY

Endless possibilities with a
maximum frame height of 2.5m and
width of 6.5m and individual sashes
that can be up to 1.2m wide




FLEXIBILITY

Doors can open in or out using the
same profiles and option for external
access on any configuration. Low
threshold option for room dividers




BESPOKE DESIGNS

Complete range of handles and
accessories to create bespoke bi-fold
designs including colour matched
handles and magnetic door holders



COLOUR OPTIONS

Colour options that complement
the aesthetic of any property,
including a duo colour option



MINIMAL SIGHT LINES

Minimal profiles for a modern look
and inline system with sash and outer
frame of the same depth

THE HIGH-PERFORMANCE ALUMINIUM BI-FOLD.

StudioGlide® isn't just a winning combination
of high performance and thermal efficiency.

Quality materials and advanced design
make for a smooth, reliable sliding mechanism
and frames that won't expand or contract,
whatever extremes the weather throws
at them.


Temperatures indoors are kept comfortable
too, with a thermal break in the frame that
reduces heat loss and high-spec energy
efficient glass to reduce energy bills
even further.

A PRODUCT OF INTELLIGENT DESIGN

StudioGlide® has been developed for use in a wide range of domestic and commercial properties. Whatever you use it for, its flexibility and versatility make it the ideal choice.

Clever features like doors that can be fitted to open inward or outwards using the same profile make life easier at the planning stage and during installation.

There's a choice of 'fully weathered' or 'low level' thresholds, complete with integrated locking solutions. Even an adjustable jamb that lets you make fine adjustments to get the perfect fit.

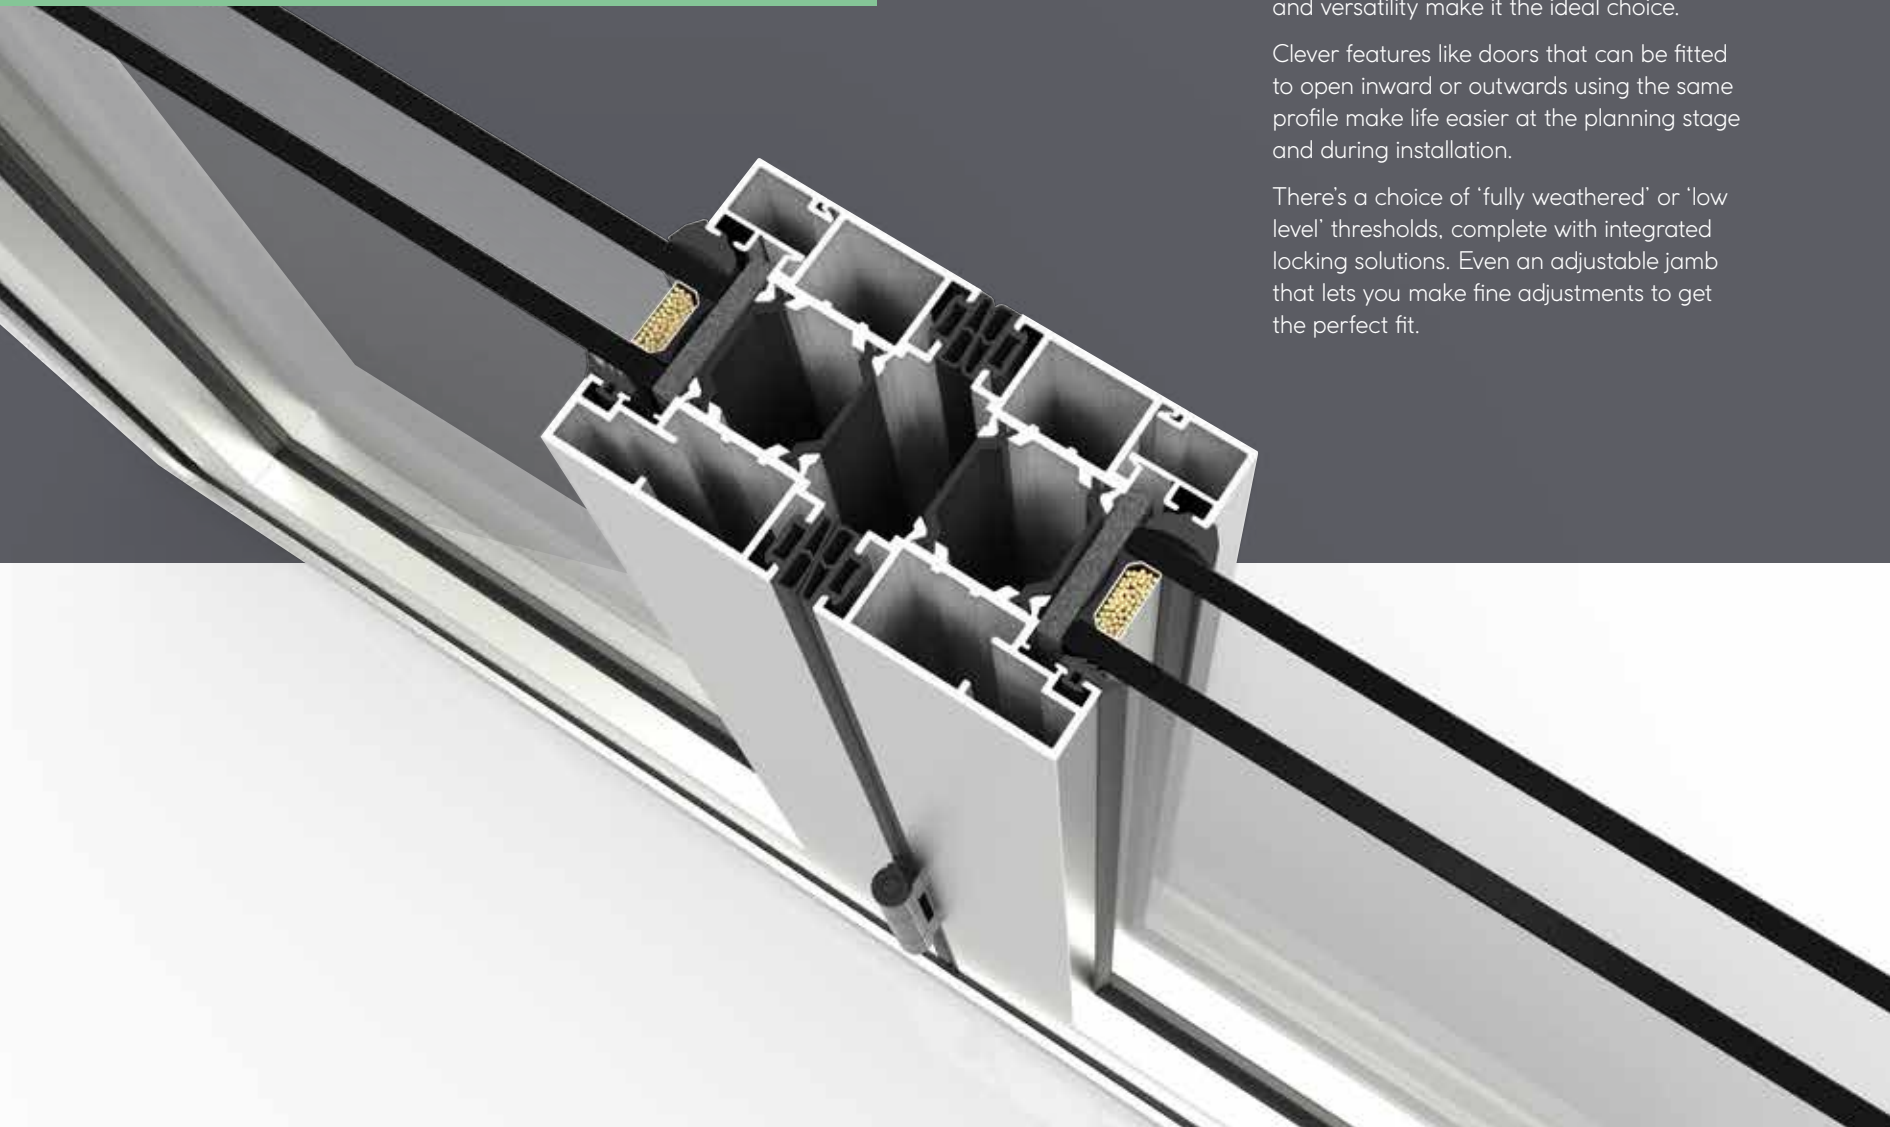



GLAZING THAT'S CLEARLY BETTER.

StudioGlide® is glazed from the inside for increased security, using purpose designed gaskets to get the best possible seal against the weather. StudioGlide® can take double or triple glazing, with folding sashes accepting 28mm double or 44mm triple glazed units.

THE SECURE CHOICE.

It might be designed to let the outside in, but not much else gets past StudioGlide®. That's thanks to industry leading security features that give you all the peace of mind that comes with full PAS 24 accreditation.



CLASSIC COLOURS TO FRAME THE VIEW


10-YEAR GUARANTEE.

StudioGlide® bi-fold door profiles and door furniture are guaranteed for ten years. That means you get all the assurance of a robust, well-designed, precision-made product that's built to last.



StudioGlide® frames are available in a range of classic colours, complemented by shootbolt and door handles in a wide choice of colours and finishes.

STANDARD FRAME COLOUR OPTIONS



WHITE EXTERIOR
& INTERIOR



BLACK EXTERIOR
& INTERIOR



ANTHRACITE
GREY EXTERIOR
& INTERIOR



ANTHRACITE
GREY EXTERIOR
& WHITE INTERIOR

DUO COLOUR OPTION



HARDWARE COLOUR OPTIONS

SHOOTBOLT HANDLES

(AVAILABLE WITH OR WITHOUT ESCUTCHEON)



WHITE



BLACK



ANTHRACITE
GREY



BRUSHED
SATIN



CHROME

DOOR HANDLES



WHITE



BLACK



ANTHRACITE
GREY



BRUSHED
SATIN



CHROME

STUDIOGLIDE® BI-FOLD DOOR

CONFIGURATIONS

The great thing about the StudioGlide® bi-fold system is the sheer choice and flexibility it brings to door design.

All options are available, with inward or outward opening doors, extra leaves, additional configurations and a choice of contemporary colours to create a customised 'glass wall' up to a width of 6.5 metres.

Open outward door combination shown.
All options are also available inward opening



TOTAL NUMBER OF SASHES

3

1

2

SASHES OPENING TO THE RIGHT

SASHES OPENING TO THE LEFT

DOOR CONFIGURATION OPTIONS

1 1 O // 1 O 1



ENTRANCE DOORS

2 1 1



2 2 O // 2 O 2



TWO SASH

3 2 1 // 3 1 2



3 3 O // 3 O 3




THREE SASH

4 3 1 // 4 1 2



4 4 O // 4 4 O



4 2 2



FOUR SASH

5 4 1 // 5 1 4



5 5 O // 5 O 5



5 3 2 // 5 2 3



FIVE SASH

6 5 1 // 6 1 5



6 6 O // 6 O 6



6 3 3



6 4 2 // 6 2 4



SIX SASH

7 6 1 // 7 1 6



7 5 2 // 7 2 5



7 4 3 // 7 3 4



7 7 O // 7 O 7



SEVEN SASH

Please note: The maximum number of sashes recommended going one way is 7. This is because of the amount of force needed to fully open 7 fully glazed sashes. The width and height of doors are always subject to site conditions allowing for wind loads, locations and use.

MATERIALS & FINISHING

SPECIFICATION

ALUMINIUM EXTRUSION.

Aluminium alloy 6063 T5/T6 to BS/EN12020-2:2008.
Extruded surface anodising quality.

POWDER COATING.

Polyester powder coating to BS/EN 12206-1:2004.
40 microns minimum thickness.

ANODISING.

Anodic coatings in natural colours. Anodising to BS3987:1991.AA25.

GLAZING.

StudioGlide® doors are designed for 28mm double glazed or 44mm triple glazing units are possible with bead and gasket changes.

GASKETRY.

EPDM rubber to BS7412:2007, BS4255-1:1986. 70 SHORE A.

WEATHERPILES.

Nylon or PVC backed fin-pile and wool-pile draught seals to BS7386:1997.



SIZES & WEIGHTS.


- A** Maximum overall height = 2500mm
- B** Maximum overall width = 6500mm
- C** Maximum sash width = 1200mm
- D** Maximum sash height = 2384mm
- E** Maximum sash weight = 120kg



CROSS SECTIONS

3-2-1 OPEN OUT HORIZONTAL CROSS SECTION


INSIDE

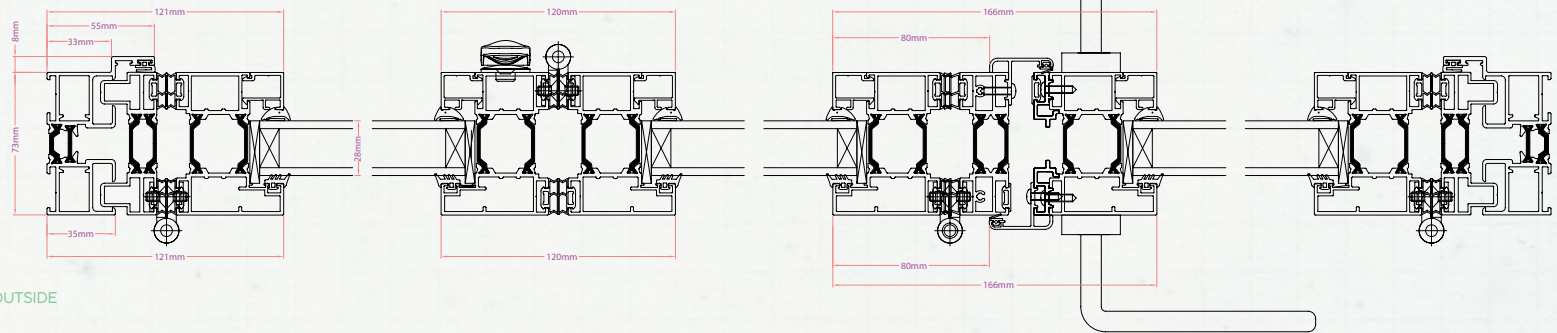

OUTSIDE



3-3-O OPEN OUT HORIZONTAL CROSS SECTION

INSIDE

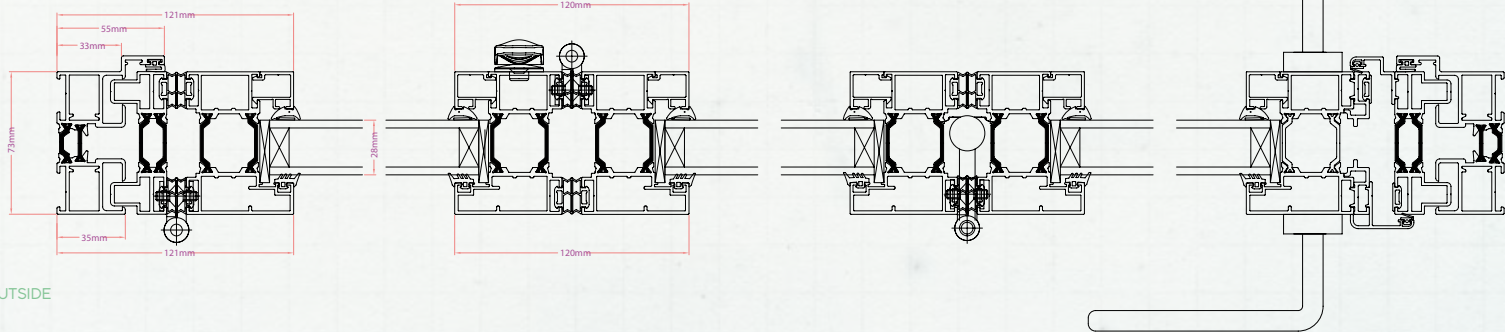

OUTSIDE

THRESHOLDS

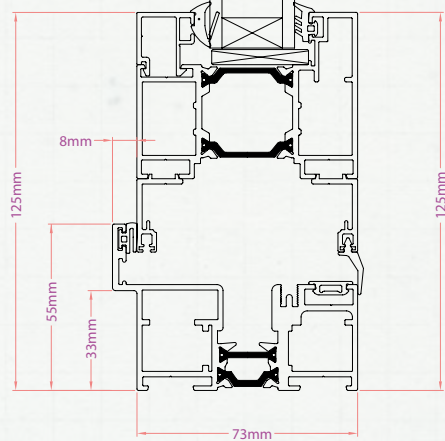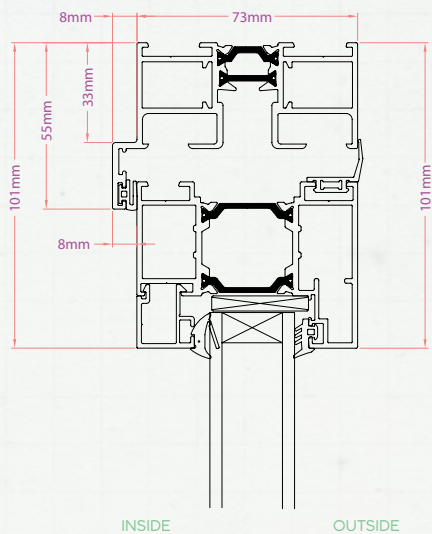


STANDARD THRESHOLD



STANDARD THRESHOLD



LOW THRESHOLD

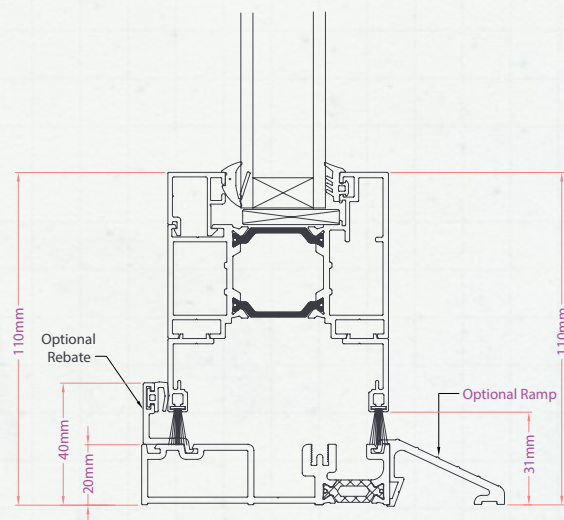

LOW THRESHOLD
(WITH OPTIONAL RAMP & REBATE)



YOUR AUTHORISED SUPPLIER:

For more information about the **StudioGlide®** bi-fold door system, call our customer services team on **0800 988 7317** or visit **studioglide.co.uk**

Product specification is subject to change without notification.
Please also note that colours shown are illustrative only, as the printing process does not allow 100% accurate colours to be reproduced.

A **Eurocell Group** Brand

