


HALFEN HBT REBEND CONNECTION

TECHNICAL PRODUCT INFORMATION

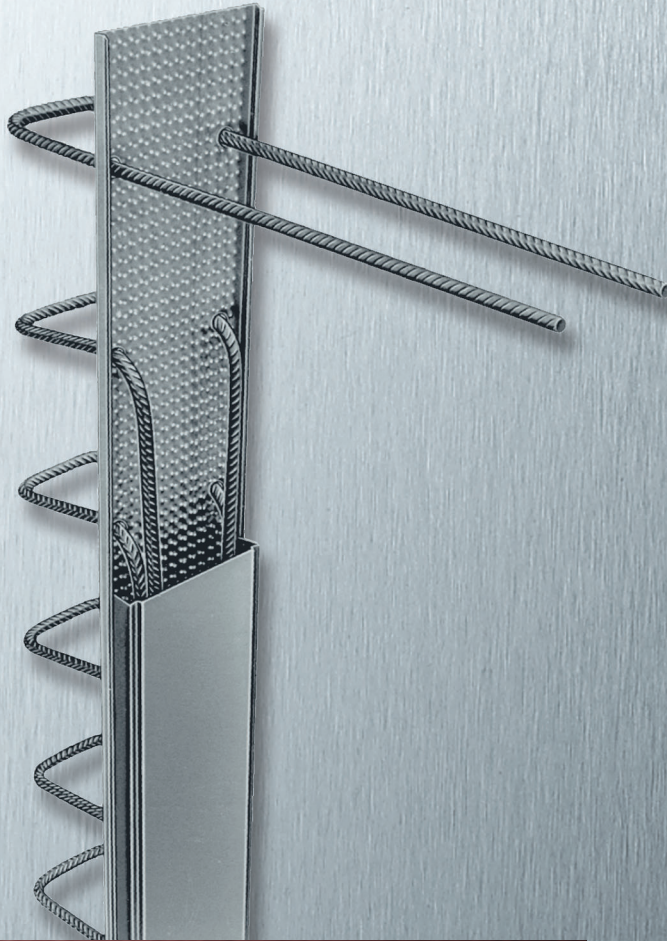

HALFEN HBT REBEND CONNECTION

HBT 16.1-E

CONCRETE

- DIBt Approval Z-21.8-2035
- Type tested acc. to approval and EUROCODE 2



HALFEN
YOUR BEST CONNECTIONS

HALFEN HBT REBEND CONNECTION

Contents



General

- Introduction and system description	3
- Type overview/application examples	4-5
- Single-row profile	6-7
- Double-row profile	8-9
- Product selection	10

Calculation

- Calculation basis according to approval Z-21.8-2035	10-11
- Selected load capacity values in accordance with the type test	12-14
- Calculating reinforced concrete corbels	15
- Layout of the reinforcement in the case	16
- Application suggestions	17
- Assembly Instructions	18
- Order examples	19
- Order form	20

References/ Tender texts/Contact

- Tender text examples	21
- HALFEN HBT references	23
- Contact addresses	24



CAD drawings for HBT-Elements can be found in the HALFEN CAD library under reinforcement technology. All drawing can be downloaded free at www.halfen.com. Following file formats are available:

- CAD - DWG and DXF

A free DVD is also available if preferred. Our contact details, addresses, telephone and fax numbers can be found on the back cover of this catalogue

Following approval and type test apply in this document:

- German National Technical Approval (DIBt Deutsches Institut für Bautechnik) No. Z-21.8-2035 for HALFEN HBT Rebend Connection
- Type test report no. 4117-6131/14 for HALFEN HBT Rebend Connection according to approval no. Z-21.8-2035




HALFEN HBT REBEND CONNECTION

Introduction and System Description

HBT – the connection solution

The HALFEN HBT is the first rebend connection with general building approval. The simplified calculation method according to the approval requires verification of only two basic load cases, this results in higher shear load capacity than previously.

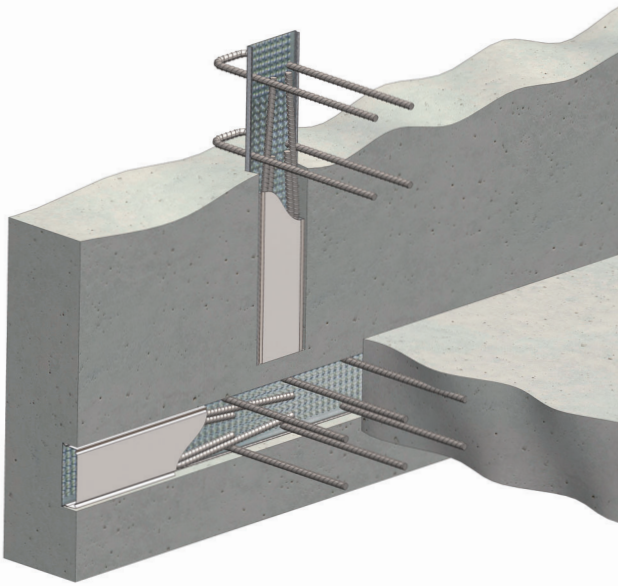

Safety

- improved planning-reliability through general building authority approval based on real-world load capacity tests
- type tested load capacity tables
- more safety in planning and execution due to factory production and third party control

Simple

- simplified calculation concept with only two basic load cases
 - shear load longitudinal to joint
 - shear load transverse to joint
- both shear and longitudinal load transfer using standard type profiles
- if required a verification of combined shear and longitudinal load in the concrete joint is possible
- standard type is suitable for constructive connections as well as for static critical connections – no risk of mix ups on-site or in the precast plant
- reduced case height – ideal for thin elements or precast concrete elements with minimal concrete cover

HALFEN HBT Rebend connections allow a simple and effective connection of reinforced concrete elements, which are cast in different phases. All types of slabs, from floor slabs, walls and stairs can be subsequently cast with sufficient bond.

The rebar are bent and secured in a case with a back and a removable cover. The HALFEN profile cases are available in different widths. The case is cast into the concrete element; after striking the formwork, the case cover is removed and the rebar is straightened.

The customer can select either a single-row or double-row profile. The single-row profile has a regular spacing of holes in a single row penetrated by reinforcement bars designed for the required application; the double-row profile is similar but has two rows.

- rebar (8, 10, 12 mm)
B500B steel (stainless steel B500 NR on request)
- the back is galvanised sheet metal with a specially profiled surface
- dimensionally stable, galvanised, sheet metal cover with a pre-punched hole to facilitate removal



Versatile









Optimal connections for a multitude of applications with 57 possible combinations of rebar and profile widths. A standardized range of product with element lengths of 0.8m and 1.25m are available for the most common applications.

Lots of reasons, one conclusion: safety, quality and protection – for you and your company.



HALFEN HBT REBEND CONNECTION

Type Overview/Application Examples

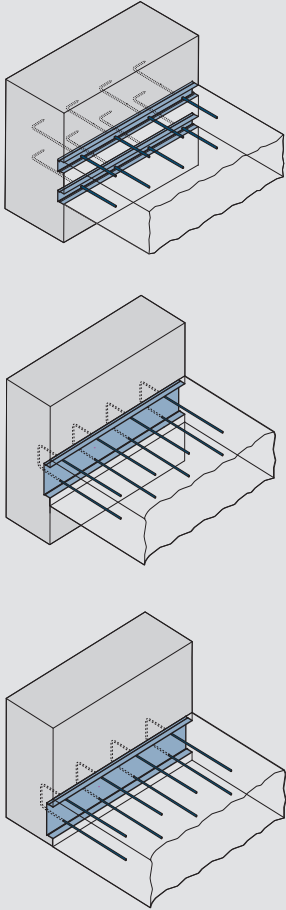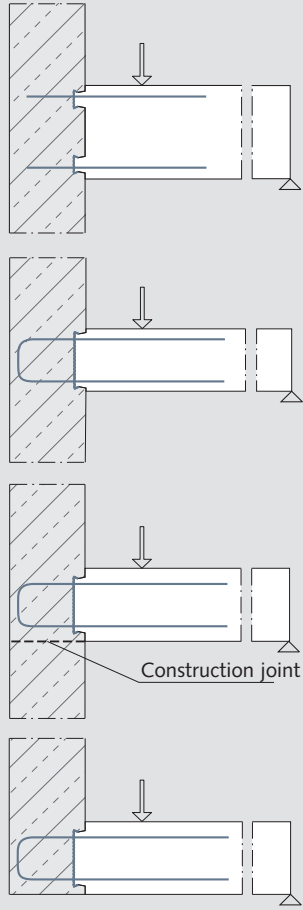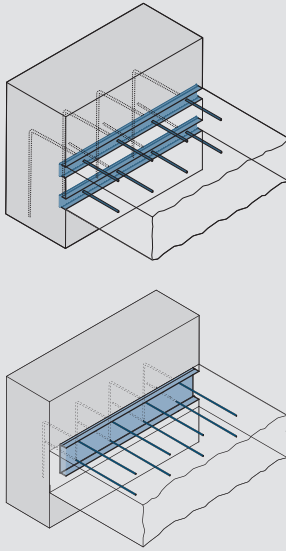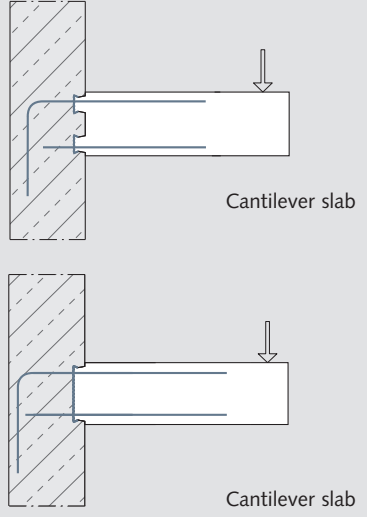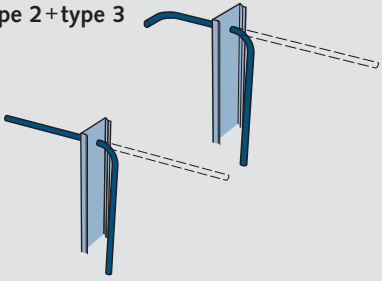Shear load transverse to the case, for example; floor-slab – wall		
Application	Vertical section	Rebar type
	 Construction joint	2×Type 1  Type 5 
Shear load transverse to the case, for example; landing-slab – wall		
Application	Vertical section	Rebar type
	 Cantilever slab Cantilever slab	Type 2+type 3  Type 23 

HALFEN HBT REBEND CONNECTION


Type Overview/Application Examples

Shear load transverse to the case, for example floor-slab – floor-slab		
Application	Vertical section	Rebar type
		Type 3
Shear load transverse to the case, for example corbel – wall		
Application	Vertical section	Rebar type
		Type 7
Shear load longitudinal to the case, for example wall – wall and floor-slab – wall		
Application	Horizontal section	Rebar type
		2 × Type 1
		Type 5


HALFEN HBT REBEND CONNECTION

Single-Row Profiles

Profile dimensions

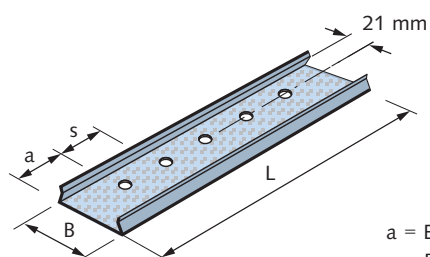

a = End spacing
s = Rebar spacing
B = Casing width
L = Element length

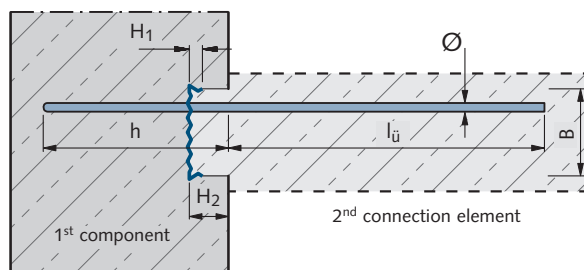


Case dimensions [mm]				
profile	rebar Ø [mm]	width B	height H ₁	height H ₂
HBT 55	8	58	12	24
	10			30
HBT 85	10	86		30
	12			36
HBT 120	10	122		30
	12			36

Rebar layout			
element length L	rebar spacing s [cm]	number of rebar	end spacing a [cm]
standard element L = 1250 mm	10	12	7.5
	15	8	10.0
	20	6	12.5
	25	5	12.5
short element L = 800 mm	10	8	5.0
	15	6	2.5
	20	4	10.0
	25	4	2.5

Other element lengths on request




Rebar types

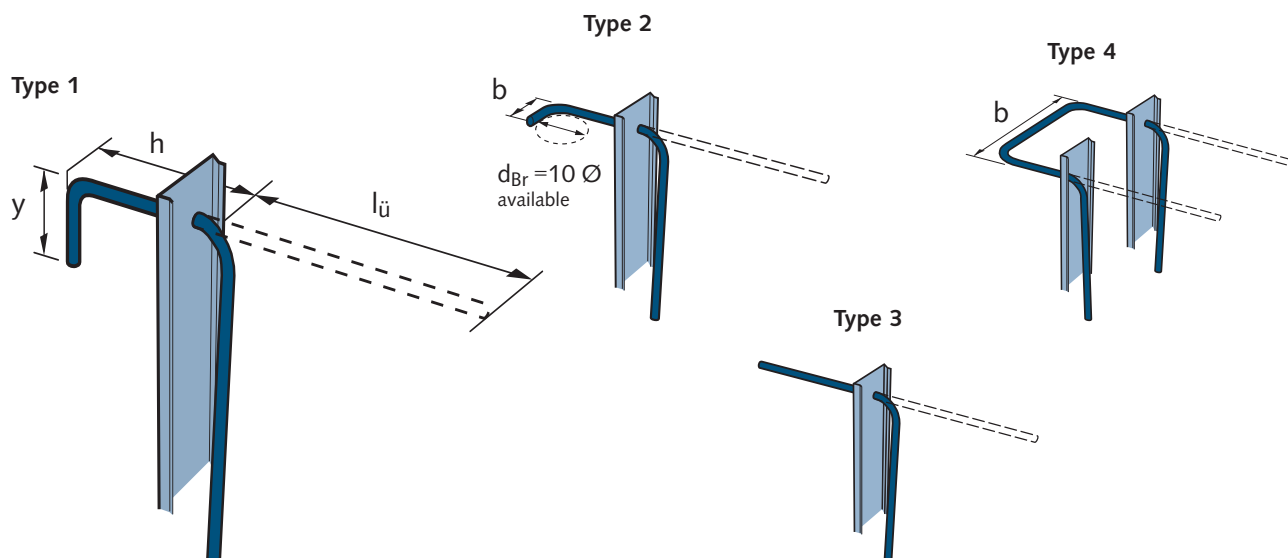

See table on page 7 for rebar dimensions

HALFEN HBT REBEND CONNECTION



Single-Row Profiles

Rebar dimensions [mm]									
profile	rebar Ø	rebar spacing	standard type 1			types 1, 2, 3, 4			only for type 4
			L = 1250 mm			h _{min}	L = 1250 mm	L ≥ 800 mm	b [mm]
	[mm]	[cm]	h	l _ü	y		l _{ü,max}	l _{ü,max}	
	8	10	170	210	75	120	210	210	200...500
		15		320			510	430	
		20					600	455	
		25						480	
	10	10	170	200	95	120	200	200	
		15		390			390	390	
		20					510	450	
		25						475	
	10	10	170	390	95	120	430	400	250...500
		15					510	425	
		20					600	450	
		25						475	
	12	10	170	430	110	120	430	395	
		15		460			510	420	
		20					600	445	
		25						470	
	10	10	170	390	95	120	600	400	on request
		15						425	
		20						450	
		25						475	
	12	10	170	460	110	120	600	395	
		15						420	
		20						445	
		25						470	

HALFEN HBT REBEND CONNECTION

Double-Row Profiles

Profile dimensions

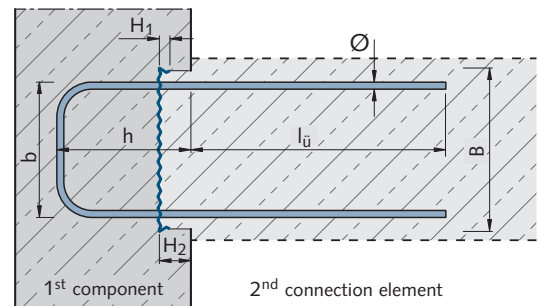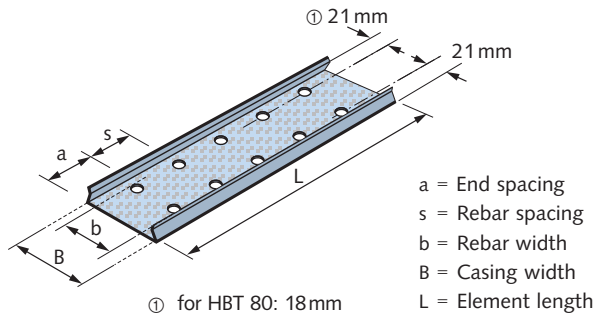


Case dimensions [mm]					
profile	rebar Ø [mm]	width B	height H ₁	height H ₂	b
HBT 80	8	86	12	24	58
	10			30	60
HBT 120	8	122		24	88
	10			30	90
	12			36	92
HBT 150	8	150		24	116
	10			30	118
	12			36	120
HBT 190	8	186		24	152
	10			30	154
	12			36	156
HBT 220	8	222		24	188
	10			30	190
	12			36	192

Rebar layout			
element length L	rebar spacing s [cm]	number of rebar	end spacing a [cm]
standard element L = 1250 mm	10	12	7.5
	15	8	10.0
	20	6	12.5
	25	5	12.5
short element L = 800 mm	10	8	5.0
	15	6	2.5
	20	4	10.0
	25	4	2.5


Other element lengths on request

Rebar types

Straight rebar





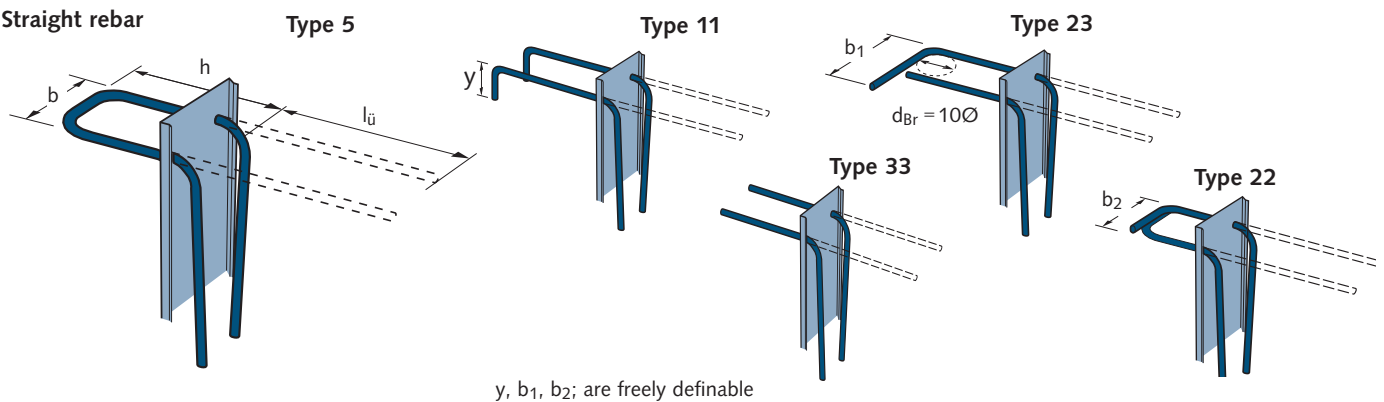


Stirrups

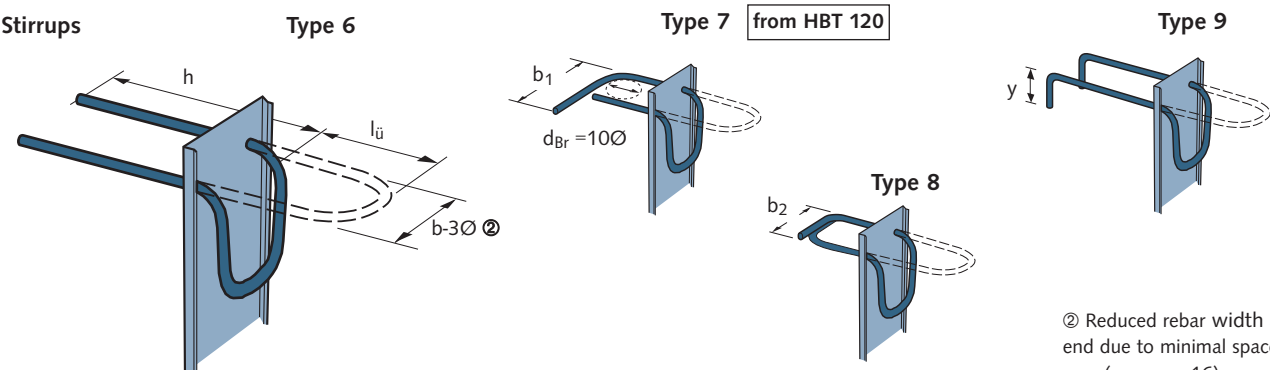

HALFEN HBT REBEND CONNECTION

Double-Row Profiles

Rebar dimensions [mm]												
profile	rebarØ	rebar spacing	standard type 5		types 5, 11, 22, 23 ④, 33			types 6, 7, 8, 9				
			L = 1250 mm			L = 1250 mm	L ≥ 800 mm	type 6	type 7 ③, 8	type 9	L ≥ 600 mm	
	[mm]	[cm]	h	l _ü	h _{min}	l _{ü,max}	l _{ü,max}	h _{min}	h _{min}	h _{min}	60 ≤ l _ü ≤ l _{ü,max}	
 HBT 80 ③	8	10	170	170	120	170	170	120	135	140	70	
		15		360		360	125					
		20		450		450	175					
		25		500		480	225					
	10	10	170	160	120	160	160	120	155	140	60	
		15		320		320	120					
		20		400		400	170					
		25		390		450	450				220	
 HBT 120	8	10	170	290	120	290	290	120	135	140	115	
		15		320		510	430				175	
		20				600	455				235	
		25					480				290	
	10	10	170	240	120	240	240	120	155	140	80	
		15		390		510	425				130	
		20				600	450				180	
		25					475				230	
	12	10	170	215	120	215	215	120	170	140	70	
		15		390		390	120					
		20		440		440	170					
		25		460		470	220					
 HBT 150	8	10	170	320	120	360	360	120	135	140	100	
		15				600	510				430	150
		20					455				210	
		25					480				260	
	10	10	170	360	120	360	360	120	155	140	85	
		15		390		510	425				135	
		20				600	450				185	
		25					475				235	
	12	10	170	310	120	310	310	120	170	140	90	
		15		460		480	420				150	
		20				530	445				200	
		25				580	470				250	
 HBT 190	8	10	170	320	120	500	405	120	135	140	100	
		15				600	510				430	150
		20					455				210	
		25					480				260	
	10	10	170	390	120	500	400	120	155	140	110	
		15				600	510				425	170
		20					450				220	
		25									475	280
	12	10	170	430	120	430	395	120	170	140	90	
		15		460		510	420				140	
		20				600	445				190	
		25					470				240	
 HBT 220	8	10	170	320	120	600	405	120	135	140	100	
		15					430				430	150
		20									455	210
		25									480	260
	10	10	170	390	120	600	400	120	155	140	110	
		15					425				425	170
		20									450	220
		25										475
	12	10	170	460	120	600	395	120	170	140	90	
		15					420				420	140
		20									445	190
		25										470

③ rebar type 7 for HBT 80 not available

④ Due to the required bending roll diameter (d_{Br} = 10x bar diam.); h_{min} for type 23 is equal to h_{min} of type 7

③ rebar type 7 for HBT 80 not available


④ Due to the required bending roll diameter ($d_{Br} = 10 \times \text{bar diam.}$); h_{min} for type 23 is equal to h_{min} of type 7

HALFEN HBT REBEND CONNECTION


Product Selection/Calculation Basis according to Approval no. Z-21.8-2035

Product selection allowing for required concrete cover of the rebend reinforcement											
profile	Thickness of component D ₂ [mm]										
	100	120	140	160	180	200	220	240	260	280	300
	concrete cover c _{nom} [mm]										
2×HBT 55 ①	-	-	≤ 25	≤ 35	≤ 45	≤ 55	≤ 65	≤ 75	≤ 85	≤ 95	≤ 105
2×HBT 85 ①	-	-	-	-	≤ 20	≤ 30	≤ 40	≤ 50	≤ 60	≤ 70	≤ 80
HBT 80	20	30	40	50	60	70	80	90	100	110	120
HBT 120	-	-	25	35	45	55	65	75	85	95	105
HBT 150	-	-	-	20	30	40	50	60	70	80	90
HBT 190	-	-	-	-	-	23	33	43	53	63	73
HBT 220	-	-	-	-	-	-	-	25	35	45	55

① depends on spacing a between the cases

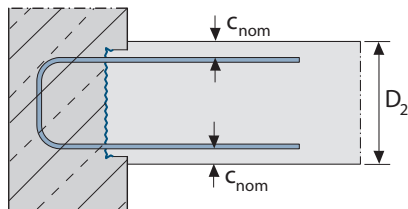

Product selection for 1-part element

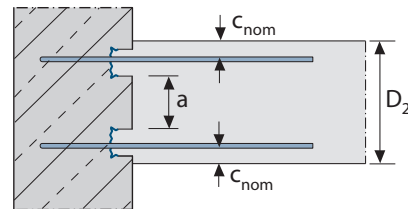

Product selection for multi-part elements

Basis for calculation according to approval number Z-21.8-2035

General information

The concept for the approval is based on the calculation and the structural application as applied in the following standards and guidelines: DIN EN 1992-1-1 with DIN EN 1992-1-1/NA (National Annex) and the DBV-guidelines "Rebending of reinforcing steel and requirements of protective boxes according to Eurocode 2". Generally two different cases of shear load are examined: shear load transverse and longitudinal to the concrete joint.


According to the approval, due to the product characteristics the shear loads transverse to the joint in the HBT Rebend connections can be classed as "indented" and shear loads longitudinal to the joint can be classified as "rough".

Material: Rebend reinforcement B500B, stainless steel
B500 NR with bar diameters of 8, 10 and 12 mm
Normal concrete ≥ C20/25

The maximum load bearing capacity of the rebend connection must be limited to 80% of the ultimate limit state; the following applies for tensile strength:

$$f_{yd,red} = 0.8 \cdot \frac{f_{yk}}{\gamma_s}$$

Existing anchorage lengths and overlap lengths must be taken into consideration for the calculation. These can be calculated from the back surface of the case. Verification of the anchorage lengths and overlap lengths is according to Eurocode 2, taking the bonding characteristics into account.

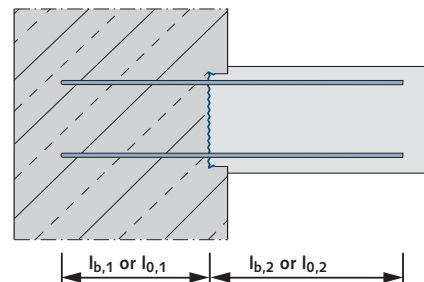

Anchorage and overlap length requirements for the reinforcement

Calculating the HALFEN HBT Rebend connections as in the DBV-guidelines "Rebending of reinforcing steel and requirements of protective boxes according to Eurocode 2" with roughness classification "smooth", is conservative while still being acceptable.


HALFEN HBT REBEND CONNECTION

Calculation Basis according to Approval no. Z-21.8-2035

Shear load, transverse to the concrete joint

Calculation is according to DIN EN 1992-1-1, section 6.2 and DIN EN 1992-1-1/NA, as for monolithic produced building components; whereby the following additional provisions must be observed.


Effective static height:

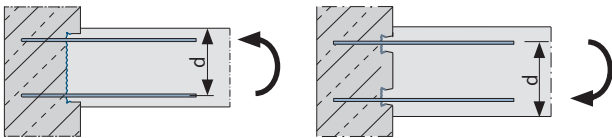

Tension zones: upper and lower component edges

Shear resistance with no shear reinforcement


The decisive resistance $V_{Rd,c}$ for the calculation is according to DIN EN 1992-1-1, section 6.2.2; whereby a reduction in the reinforcement ratio ρ_i is not required (caused by the reduced yield strength of the rebend reinforcement).



Shear resistance with shear reinforcement

The decisive resistance for verification results from 30% of the shear load resistance $V_{Rd,max}$ according to DIN EN 1992-1-1, section 6.2.3:

$$V_{Ed} \leq V_{Rd} \leq 0.3 \cdot V_{Rd,max}$$



An additional load in the longitudinal reinforcement caused by shear forces must be verified assuming a compression strut angle of 45° ($\cot \theta = 1.0$). The required shear reinforcement is calculated using $\cot \theta = 1.0$.



To calculate the shear load reinforcement for HALFEN HDB-S Shear rails see HDB technical product information and the approvals Z-15.1-249 and Z-15.1-270.

Shear load, longitudinal to the concrete joint

Static verification is according to DIN EN 1992-1-1, section 6.2.5 and DIN EN 1992-1-1/NA (National Annex), whereby the following additional provisions are to be observed.

Factors to be used to calculate the shear load resistance:

$$\begin{aligned} c &= 0.4 \\ \mu &= 0.7 \\ v &= 0.5 \end{aligned}$$

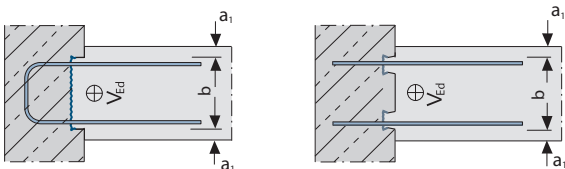


If the spaces between the HBT Cases are additionally subjected to shear load, then these must be designed as rough or suitably indented in accordance with DIN EN 1992-1-1. The edge areas can also be assumed as load bearing if $a_1 \geq 50 \text{ mm}$.

The concrete cover c_{nom} is according to DIN EN 1992-1-1. In addition for the rebend reinforcement the following must be observed.

$$c_{nom} \geq \max. \{3\phi, 30 \text{ mm, max. aggregate diameter } d_g\}$$

Combined shear load, transverse and longitudinal to the concrete joint

If the connection is subjected to combined shear load (longitudinal and transverse to the concrete joint), each load direction can be verified separately.



TECHNICAL CONSULTATION

HALFEN Technical services


See back of catalogue for technical advice for your individual projects and contact information for all products.

HALFEN HBT REBEND CONNECTION


Selected Load Capacity Values according to Type Test and Approval no. Z-21.8-2035

Shear load capacity transverse to the case – no shear reinforcement

Single connection example; 1 × **Type 5**

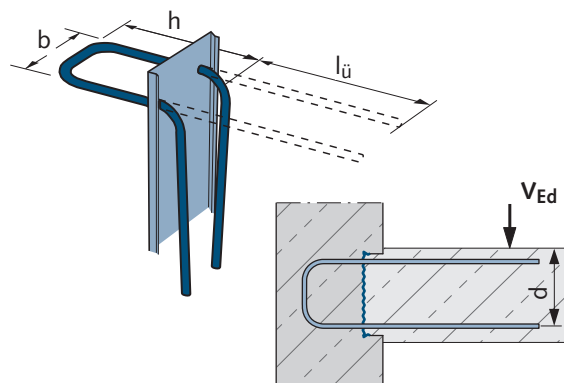

Multipart connection example; 2 × **Type 1**

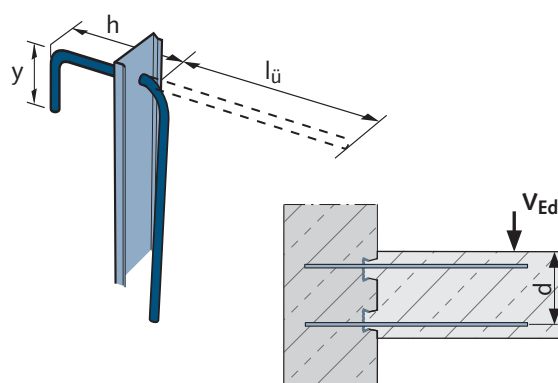

Shear load resistance V_{Rd} [kN/m] ($\leq 0.3 \cdot V_{Rd,max}$)							Always refer to the information in the type test			
rebar $\varnothing$ / spacing s [mm/cm]	d = 100 mm	d = 120 mm	d = 140 mm	d = 160 mm	d = 180 mm	d = 200 mm	d = 220 mm	d = 240 mm	d = 260 mm	d = 280 mm
	HBT 80	HBT 120	HBT 150	HBT 150	HBT 190	HBT 190	HBT 220	HBT 220	2 × 55 (Ø8) 2 × 85 (Ø10,12)	2 × 55 (Ø8) 2 × 85 (Ø10,12)
concrete strength class C20/25										
8/20	44.3	53.1	62.0	70.8	78.7	78.7	78.7	78.7	78.7	78.7
8/15	44.3	53.1	62.0	70.8	79.7	88.5	94.0	99.4	104.7	104.9
8/10	-	53.1	62.0	70.8	79.7	88.5	94.0	99.4	104.7	109.8
10/20	44.3	53.1	62.0	70.8	79.7	88.5	94.0	98.4	98.4	98.4
10/15	44.3	53.1	62.0	70.8	79.7	88.5	94.0	99.4	104.7	109.8
10/10	-	56.6	62.7	70.8	79.7	88.5	94.0	99.4	104.7	109.8
12/20	-	53.1	62.0	70.8	79.7	88.5	94.0	99.4	104.7	109.8
12/15	-	55.8	62.0	70.8	79.7	88.5	94.0	99.4	104.7	109.8
12/10	-	63.9	70.8	77.4	83.7	89.8	94.0	99.4	104.7	109.8
concrete strength class C25/30										
8/20	49.5	59.4	69.3	78.7	78.7	78.7	78.7	78.7	78.7	78.7
8/15	49.5	59.4	69.3	79.2	89.1	99.0	104.9	104.9	104.9	104.9
8/10	-	59.4	69.3	79.2	89.1	99.0	105.1	111.1	117.0	122.8
10/20	49.5	59.4	69.3	79.2	89.1	99.0	105.1	111.1	114.2	114.2
10/15	49.5	59.4	69.3	79.2	89.1	99.0	105.1	111.1	117.0	122.8
10/10	-	60.9	69.3	79.2	89.1	99.0	105.1	111.1	117.0	122.8
12/20	-	59.4	69.3	79.2	89.1	99.0	105.1	111.1	117.0	122.8
12/15	-	60.1	69.3	79.2	89.1	99.0	105.1	111.1	117.0	122.8
12/10	-	68.8	76.3	83.4	90.2	99.0	105.1	111.1	117.0	122.8
concrete strength class C30/37										
8/20	54.2	65.1	75.9	86.8	97.6	108.4	115.1	121.7	128.2	134.5
8/15	54.2	65.1	75.9	86.8	97.6	108.4	115.1	121.7	128.2	134.5
8/10	-	65.1	75.9	86.8	97.6	108.4	115.1	121.7	128.2	134.5
10/20	54.2	65.1	75.9	86.8	97.6	108.4	115.1	121.7	128.2	134.5
10/15	54.2	65.1	75.9	86.8	97.6	108.4	115.1	121.7	128.2	134.5
10/10	-	65.1	75.9	86.8	97.6	108.4	115.1	121.7	128.2	134.5
12/20	-	65.1	75.9	86.8	97.6	108.4	115.1	121.7	128.2	134.5
12/15	-	65.1	75.9	86.8	97.6	108.4	115.1	121.7	128.2	134.5
12/10	-	73.1	81.0	88.6	97.6	108.4	115.1	121.7	128.2	134.5

Note: Standard dimension according to page 7 and 9.


Load capacities for further rebar dimensions and for rebar spacings of 25 cm, see type test.

HALFEN HBT REBEND CONNECTION


Selected Load Capacity Values according to Type Test and Approval no. Z-21.8-2035

Shear load capacity transverse to the case – with shear reinforcement

Single connection example; 1 × Type 5

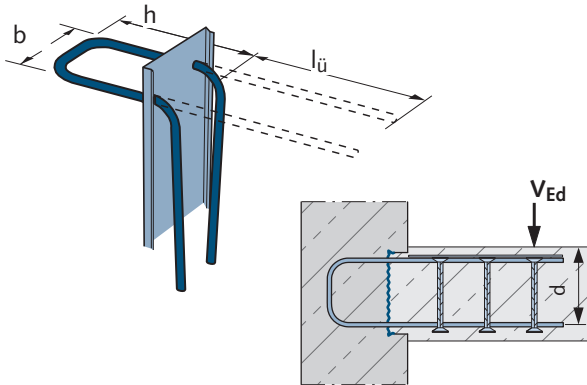

Multipart connection example; 2 × Type 1

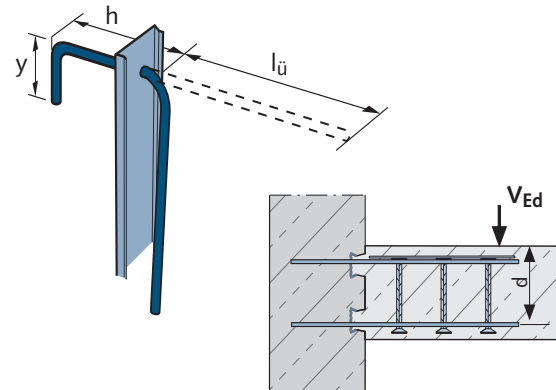

Please refer to the HDB Product information and approvals no. Z-15.1-249 and Z-15.1-270 when determining the shear reinforcement using HALFEN HDB-S Shear reinforcement.

Shear load resistance V_{Rd} [kN/m] ($\leq 0.3 \cdot V_{Rd,max}$)							Always refer to the information in the type test			
rebar $\varnothing$ / spacing s [mm/cm]	d = 100 mm	d = 120 mm	d = 140 mm	d = 160 mm	d = 180 mm	d = 200 mm	d = 220 mm	d = 240 mm	d = 260 mm	d = 280 mm
	HBT 80	HBT 120	HBT 150	HBT 150	HBT 190	HBT 190	HBT 220	HBT 220	2 × 55 (Ø8) 2 × 85 (Ø10,12)	2 × 55 (Ø8) 2 × 85 (Ø10,12)
concrete strength class C20/25										
8/20	76.5	87.4	87.4	87.4	87.4	87.4	87.4	87.4	87.4	87.4
8/15	76.5	102.0	116.6	116.6	116.6	116.6	116.6	116.6	116.6	116.6
8/10	-	102.0	127.5	153.0	174.8	174.8	174.8	174.8	136.5	136.5
10/20	76.5	102.0	109.4	109.4	109.4	109.4	109.4	109.4	109.4	109.4
10/15	76.5	102.0	127.5	145.8	145.8	145.8	145.8	145.8	145.8	145.8
10/10	-	102.0	127.5	153.0	178.5	204.0	218.7	218.7	218.7	218.7
12/20	-	102.0	125.6	125.6	125.6	125.6	125.6	125.6	125.6	125.6
12/15	-	102.0	127.5	153.0	167.5	167.5	167.5	167.5	167.5	167.5
12/10	-	102.0	127.5	153.0	178.5	204.0	229.5	251.2	251.2	251.2
concrete strength class C25/30										
8/20	87.4	87.4	87.4	87.4	87.4	87.4	87.4	87.4	87.4	87.4
8/15	95.6	116.6	116.6	116.6	116.6	116.6	116.6	116.6	116.6	116.6
8/10	-	127.5	159.4	174.8	174.8	174.8	174.8	174.8	158.4	158.4
10/20	95.6	126.9	126.9	126.9	126.9	126.9	126.9	126.9	126.9	126.9
10/15	95.6	127.5	159.4	169.2	169.2	169.2	169.2	169.2	169.2	169.2
10/10	-	127.5	159.4	191.3	223.1	253.8	253.8	253.8	253.8	253.8
12/20	-	127.5	145.8	145.8	145.8	145.8	145.8	145.8	145.8	145.8
12/15	-	127.5	159.4	191.3	194.4	194.4	194.4	194.4	194.4	194.4
12/10	-	127.5	159.4	191.3	223.1	255.0	286.9	291.5	291.5	291.5
concrete strength class C30/37										
8/20	87.4	87.4	87.4	87.4	87.4	87.4	87.4	87.4	87.4	87.4
8/15	114.8	116.6	116.6	116.6	116.6	116.6	116.6	116.6	116.6	116.6
8/10	-	153.0	174.8	174.8	174.8	174.8	174.8	174.8	174.8	174.8
10/20	114.8	136.6	136.6	136.6	136.6	136.6	136.6	136.6	136.6	136.6
10/15	114.8	153.0	182.1	182.1	182.1	182.1	182.1	182.1	182.1	182.1
10/10	-	153.0	191.3	229.5	267.8	273.2	273.2	273.2	273.2	273.2
12/20	-	153.0	164.6	164.6	164.6	164.6	164.6	164.6	164.6	164.6
12/15	-	153.0	191.3	219.5	219.5	219.5	219.5	219.5	219.5	219.5
12/10	-	153.0	191.3	229.5	267.8	306.0	329.2	329.2	329.2	329.2

Note: Standard dimension according to page 7 and 9.



Load capacities for further rebar dimensions and for rebar spacings of 25 cm, see type test.

HALFEN HBT REBEND CONNECTION

Basis of Calculation According to Type Test and Approval no. Z-21.8-2035

Shear load capacity, longitudinal to the case – single row profile

Multipart connection example; 2 × **Type 1**
Standard type according to page 7





Shear load resistance V_{Rdi} [kN/m] ($\leq V_{Rdi,max}$)							Always refer to the information in the type test					
profile	b=260mm			b=300mm			2×HBT 85 (Ø 10, 12) b=360mm			b=400mm		
	concrete strength class											
rebarØ[mm]/ spacing s [cm]	C20/25	C25/30	C30/37	C20/25	C25/30	C30/37	C20/25	C25/30	C30/37	C20/25	C25/30	C30/37
8/20	193.4	224.4	253.4	207.4	240.7	271.8	228.5	265.1	299.4	242.5	281.4	317.7
8/15	227.4	263.9	298.0	241.5	280.2	316.4	262.5	304.6	344.0	276.6	320.9	362.4
8/10	295.6	343.0	387.3	309.6	359.3	405.7	330.7	383.7	433.3	344.7	400.0	451.7
10/20	213.7	248.0	280.0	227.7	264.2	298.4	248.8	288.7	326.0	262.8	304.9	344.3
10/15	254.5	295.3	333.5	268.5	311.6	351.9	289.6	336.0	379.5	303.6	352.3	397.8
10/10	336.2	390.1	440.5	350.2	406.4	458.9	371.3	430.8	486.5	385.3	447.1	504.9
12/20	231.9	269.1	303.9	245.9	285.4	322.2	267.0	309.8	349.8	281.0	326.1	368.2
12/15	278.8	323.5	365.3	292.8	339.8	383.7	313.9	364.2	411.3	327.9	380.5	429.6
12/10	372.6	432.3	488.2	386.6	448.6	506.6	407.7	473.0	534.2	421.7	489.3	552.6

Note: Load capacities for further joint widths, for further rebar dimensions and for rebar spacings of 25 cm, see type test.
The joint areas a between the HBT Cases must be designed as rough or suitably indented as defined in DIN EN 1992-1-1; 6.2.5.

Shear load capacity, longitudinal to the case – double-row profile

Single connection example; 1 × **Type 5**
Standard type according to page 9

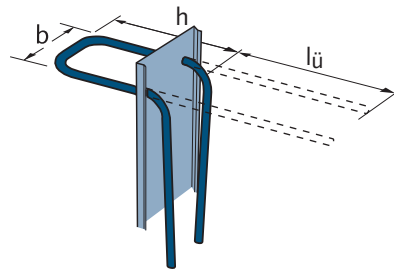


Shear load resistance V_{Rdi} [kN/m] ($\leq V_{Rdi,max}$) for HBT 120, 150, 190 and 220								Always refer to the information in the type test				
profile	HBT 120			HBT 150			HBT 190			HBT 220		
rebarØ [mm]/ spacing s [cm]	concrete strength class											
	C20/25	C25/30	C30/37	C20/25	C25/30	C30/37	C20/25	C25/30	C30/37	C20/25	C25/30	C30/37
8/20	145.0	168.2	190.0	154.8	179.6	202.9	167.4	194.3	219.4	180.1	208.9	235.9
8/15	179.1	207.8	234.6	188.9	219.2	247.5	201.5	233.8	264.0	214.1	248.5	280.6
8/10	247.2	286.8	323.9	257.0	298.2	336.8	269.6	312.9	353.3	282.3	327.5	369.9
10/20	165.3	191.8	216.6	175.1	203.2	229.5	187.7	217.8	246.0	200.4	232.5	262.5
10/15	206.1	239.2	270.1	215.9	250.6	283.0	228.6	265.2	299.5	241.2	279.9	316.0
10/10	279.0	323.8	365.6	297.6	345.3	390.0	310.2	360.0	406.5	322.9	374.6	423.1
12/20	183.5	212.9	240.4	193.3	224.3	253.3	205.9	239.0	269.8	218.6	253.6	286.4
12/15	230.4	267.3	301.9	240.2	278.7	314.8	252.8	293.4	331.3	265.5	308.0	347.8
12/10	306.3	355.5	401.4	334.0	387.6	437.7	346.6	402.2	454.2	359.3	416.9	470.8

Note: Load capacities for the HBT 80 profile; for further rebar dimensions and for rebar spacings of 25 cm, see type test

HALFEN HBT REBEND CONNECTION

Layout of the Reinforcement in the Case

Minimal element lengths for the rebend connections – layout of the reinforcement bars in the case

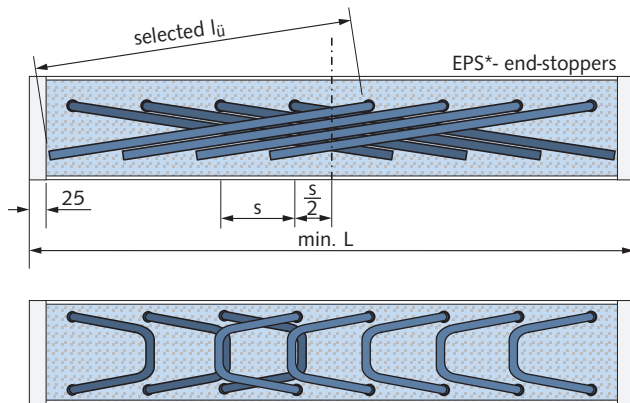

* Expanded polystyrene

Minimal element lengths for $l_{u\text{ standard}}$

$\varnothing$ [mm]	rebar spacing s [cm]	① l_u [mm]	minimal case length L [mm]	number of rebar
8	10	320	650	6
8	15	320	600	4
8	20	320	650	4
10	10	390	800	8
10	15	390	750	4
10	20	390	700	4
12	10	460	950	8
12	15	460	900	6
12	20	460	850	4

① Max. l_u - observe dimensions for selected profile (see page 7 and 9)

HBT Strip – the perfect solution for precast elements

Due to inherent low concrete cover and restriction in element size in precast elements, demands on precise measurement and manufacturing of rebend connections are generally higher.

The HBT-Connection with 'HBT Strip' (HBT-S) fulfils these requirements perfectly. Available for all double-row HBT connections with rebar types 6, 7, 8 and 9, in profile widths HBT - S 80, 120, 150, 190, 220.


- rebars are secured during transport
- compliance with required over-lap and anchorage lengths
- recommended for loops and corbel connections
- HBT Strip is easily removed after striking the formwork

Order example:

HBT - S - 80 - 10/15 - 6 - 1250

element length L [mm]
rebar type (see page 8)
rebar diameter $\varnothing$ [mm]/rebar spacing s [cm]
profile identifier - S for 'HBT-Strip'

Installation is as described on page 18; the HBT Strip must be removed after all connecting rebar have been rebent.

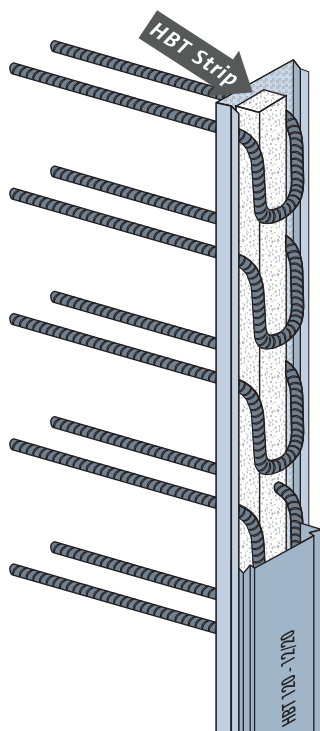

HALFEN HBT REBEND CONNECTION

Application Suggestions


Application of short elements

Various lengths — efficient installation times

Combining 1250 mm standard elements and 800 mm elements helps to avoid unnecessary modification of HBT Elements.

Standard combinations					
HBT Element	clear floor height [m]				
	2.40	2.50	2.85	3.30	3.75
short element L = 800 mm	3	-	2	1	-
standard element L = 1250 mm	-	2	1	2	3

In numerous applications, further on-site modification of the HBT cases is therefore not required. The risk of damaging the rebar in the casing is avoided. The planner can plan more efficiently and on-site preparation time for installation of the HBT Elements is reduced.

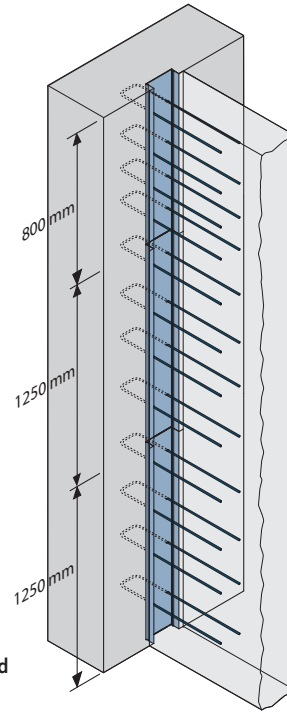


Wall connection using two 1250 mm HBT Elements and a 800 mm HBT Element to obtain 3.30 m floor height

In combination with HBS-05

Combined strength!

In applications with concentrated shear loads HBT Rebend connections in combination with the proven HALFEN HBS-05 Screw connections is feasible. HBS-05 Connection rebars can be used if the calculated shear load in an area exceeds the allowable characteristic resistance values for the HBT Profiles. The surface characteristics in the area of the HBS-05 Screw connections must be designed as “rough” or “indented”. Verification of the shear load transfer is according to DIN EN 1992-1-1, 6.2.5. The result is a **cost effective** solution and **efficient** installation.




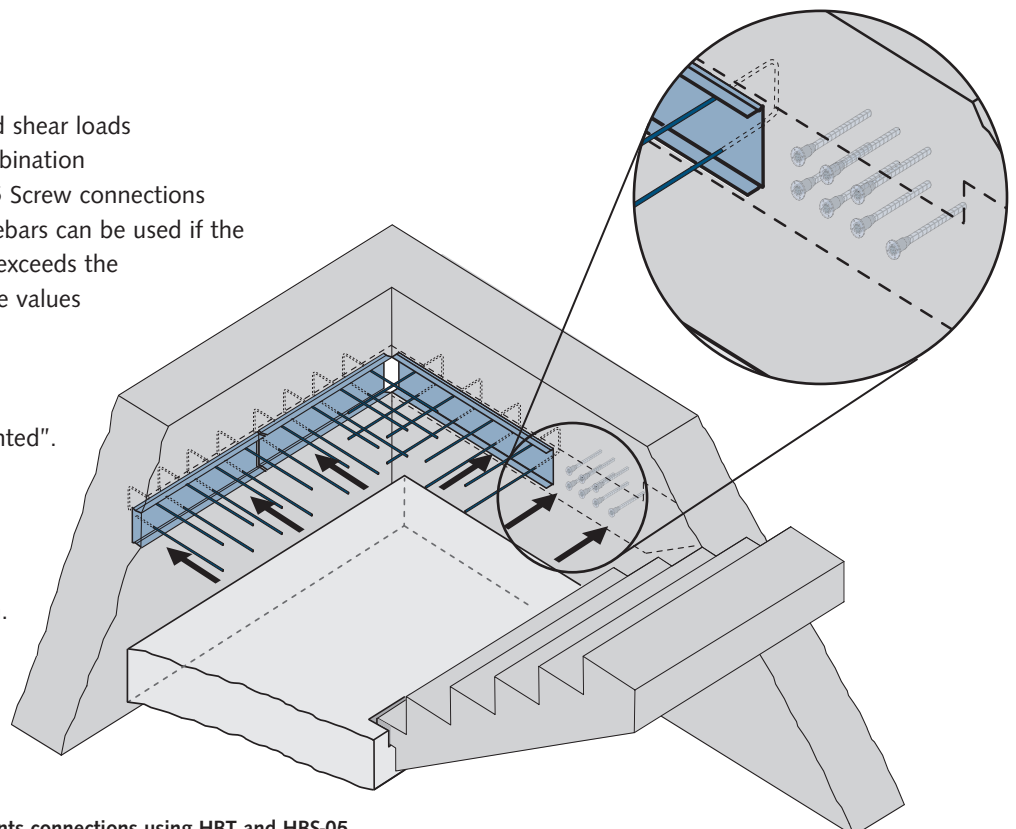


Stair-elements connections using HBT and HBS-05

HALFEN HBT REBEND CONNECTION

Assembly Instructions

Assembly instructions

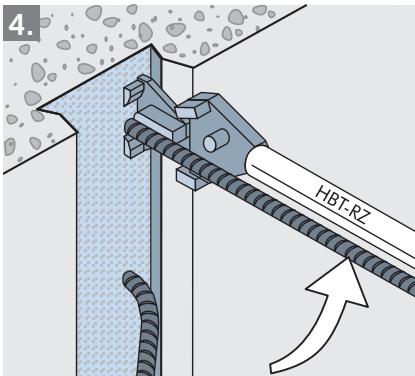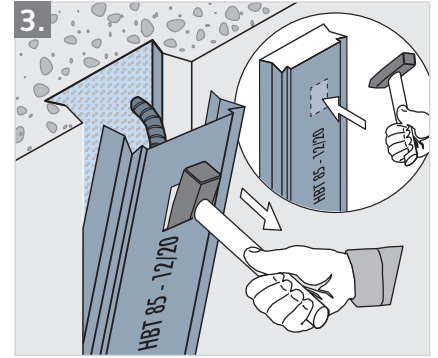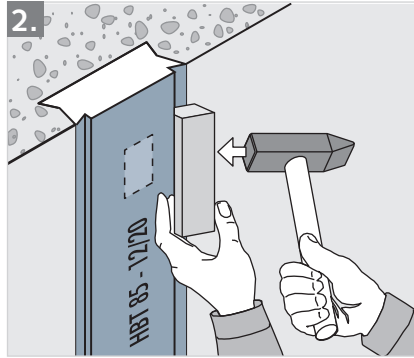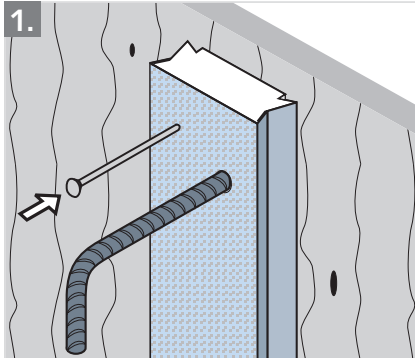

1. Nail the HBT Element to the timber formwork in the specified position. Use suitable methods for fixing elements to metal formwork, for example magnets. Check stirrup lengths protruding from the case after installation.
2. After the concrete has cured, strike the formwork; hitting a wood block placed in the long groove in the cover with a hammer, loosen the cover.
3. Use a hammer with a claw to punch-in the perforated hole in the cover; hook the hammer in the hole and pull the lid out.
4. Place the HALFEN Rebending tool under the rebar and pull down on the handle evenly with both hands until the rebar is in the correct position. The bar must be rebent straight without any kinks. Proceed in a similar manner to rebend all bars in the HBT Element one-by-one. The profiled back of the HBT Element case remains in the concrete.


Note: A more detailed installation instruction can be found at www.halfen.com.

HBT Element adapted to curved formwork


Adapting the HBT Case

Using an angle-grinder cut approximately 1 cm deep incisions symmetrically into both sides of the case at regular intervals; the HBT housing loses its rigidity, easing fixing to the formwork. To achieve a better fit to smaller curvature ($< 3.00\text{ m}$), up to seven incisions per side are possible.


After fixing the HBT Case to the formwork cover the incisions with adhesive tape to prevent concrete seeping into the form.

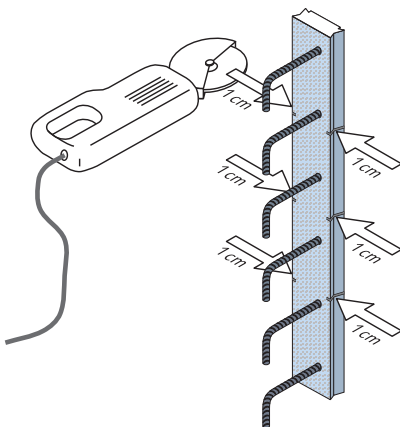

Caution when working with an angle-grinder!
The reinforcing steel bars in the HBT Case must not be damaged.

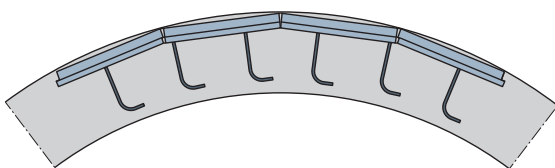

HBT Element fitted to an convex curvature
Outer radius $\geq$ ca. 3.00 m ; smaller radius is achieved with more incisions.

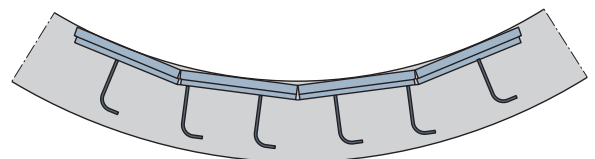

HBT Element fitted to an concave curvature
Inner radius $\geq$ ca. 3.00 m ; smaller radius is achieved with more incisions.

HALFEN HBT REBEND CONNECTION




Order Examples

Order examples

HALFEN offers a wide range of standard HBT Rebend connections for the most common applications (see page 6ff.).

There is also a wide product range with corresponding profile widths and rebar shapes to choose from.

Rebar dimensions and element lengths are freely definable, limited only by geometric specifications and limits in production (see also page 16).

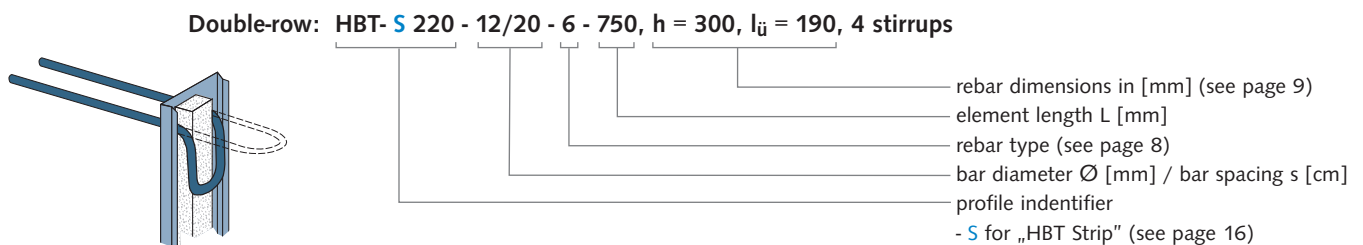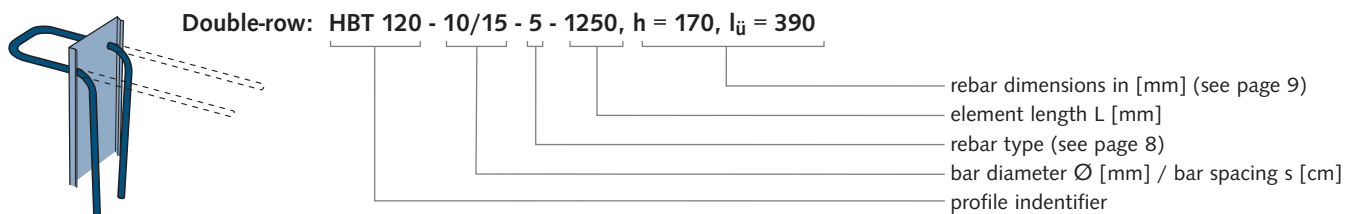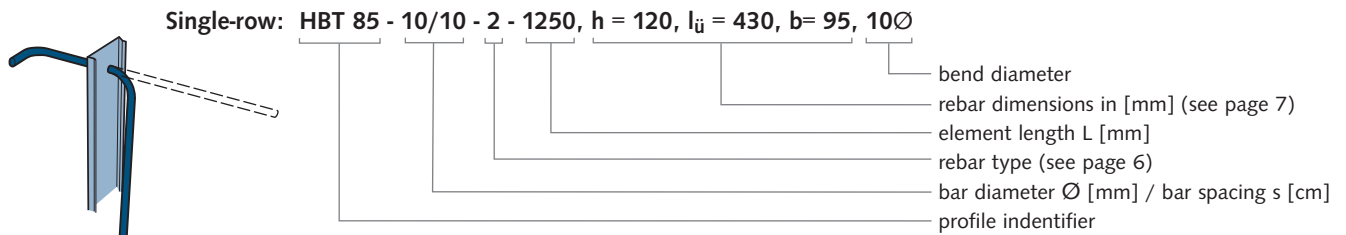


HBT Connection with foam strip filler
„HBT Strip“ (see page 16).

HALFEN HBT REBEND CONNECTION

Order form

Single and double-row connections

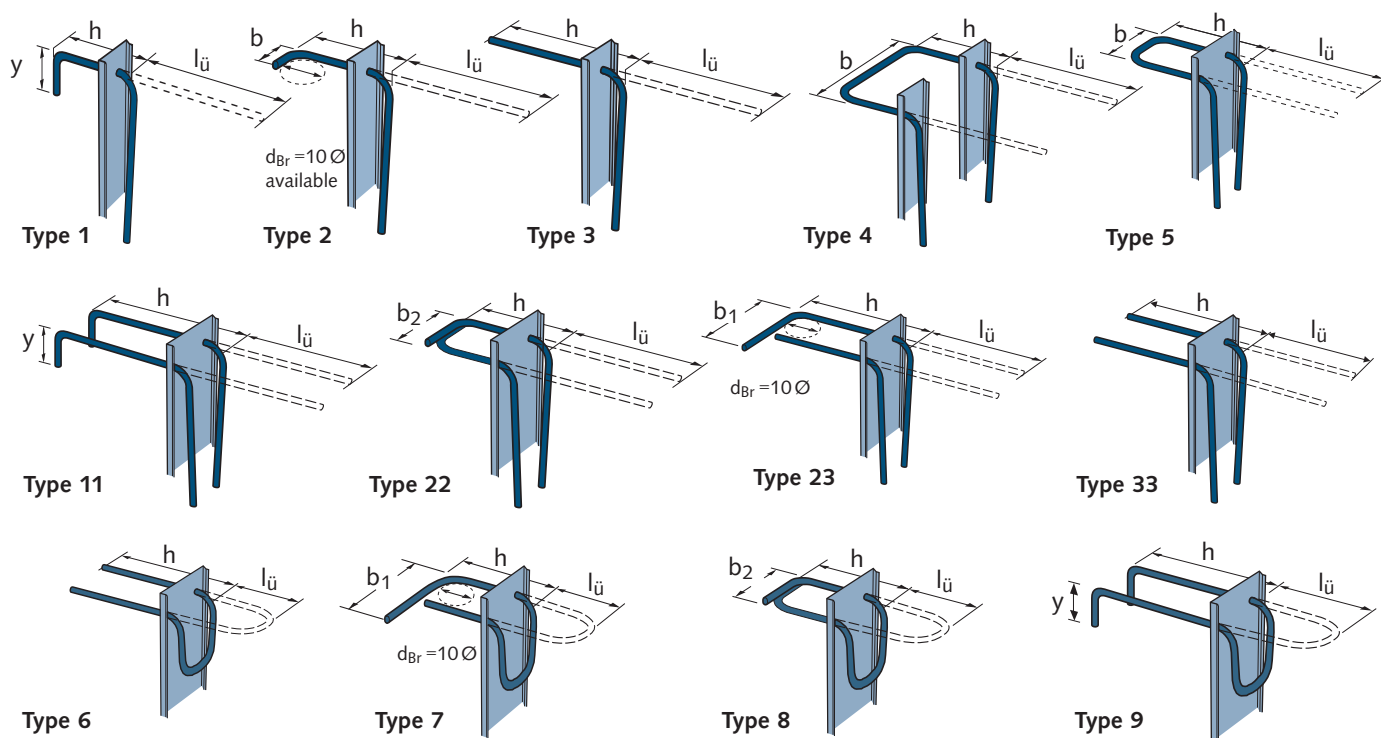

Pos.	profile HBT...	rebar $\varnothing$ [mm]	rebar spacing s [cm]	stirrup type	element length L [mm]	h [mm]	$l_{\bar{u}}$ [mm]	1 × value in [mm] if present				d_{Br}	total length [m]	number of elements [items]
								y	b	b_1	b_2			

Note: do not exceed $l_{\bar{u},max}$ see table on page 7 and 9; see page 6 to 9 for rebar and profile dimensions.

Single-row connection	Company	Fax or email	Double-row connection
	Address	this form to	
	City, Postcode/Zip.	HALFEN.	
	Tel. no.	See back-cover	
	E-Mail	for addresses.	
	Fax		

HALFEN HBT REBEND CONNECTION

Tender Texts

HALFEN Rebend connection, type HBT 85-10/20-1-1250

HALFEN HBT Rebend connection with single-row rebend reinforcement in a galvanised sheet-metal case to form a reinforced connection, with general building authority approval no. Z-21.8-2035,

Type HBT 85 – 10/20 – 1 – 1250

with

85 = type identifier for a case width of 85 mm with a single-row of rebar,

10/20 = reinforcement steel B500B with 10 mm bar diameter and 200 mm bar spacing,

1 = standard rebar type 1,


1250 = element length [mm],

in standard rebar dimensions

rebar length 1 $h = 170 \text{ mm}$,

rebar length 2 $l_{\bar{u}} = 390 \text{ mm}$,

bend length $y = 95 \text{ mm}$,

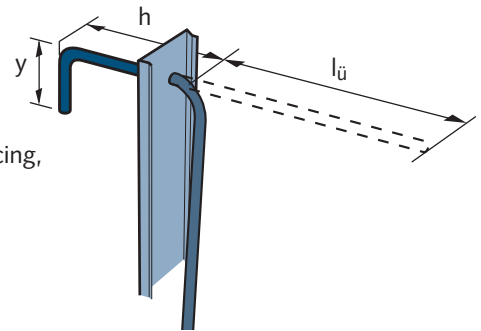

or equivalent; deliver and install according to the manufacturer's instructions.

HALFEN Rebend connection, type HBT 150-12/15-5-1250

HALFEN HBT Rebend connection with double-row rebend reinforcement in a galvanised sheet-metal case to form a reinforced connection, with general building authority approval no. Z-21.8-2035,

Type HBT 150 – 12/15 – 5 – 1250

with

150 = type identifier for a case width of 150 mm with a double-row of rebar,

12/15 = reinforcement steel B500B with 12 mm bar diameter and 150 mm bar spacing,


5 = standard rebar type 5,

1250 = element length [mm],

in standard rebar dimensions

rebar length 1 $h = 170 \text{ mm}$,

rebar length 2 $l_{\bar{u}} = 460 \text{ mm}$,

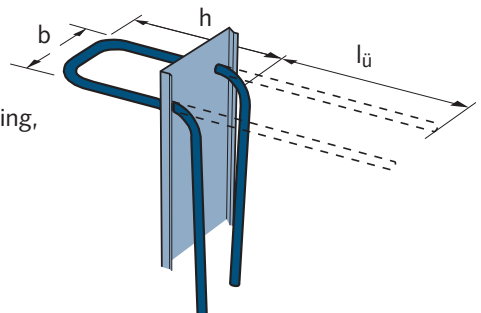

or equivalent; deliver and install according to the manufacturer's instructions.

HALFEN Rebend connection, with stainless steel reinforcement bars

Use the text as above, but replace "B500B" with "stainless steel B500 NR according to building authority approval".


Further tender texts can be found at www.halfen.com.

HALFEN HBT REBEND CONNECTION



Further HALFEN Reinforcement Products

HALFEN HBS-05 Screw connections

The HALFEN HBS-05 Screw connections allow rebar continuity joints possible with simple screw and socket rebar. Their versatility allows nearly every type of reinforcement joint. HALFEN HBS-05 fulfils German and international certification criterion. Extensive certification and test reports prove their suitability also under extreme conditions.

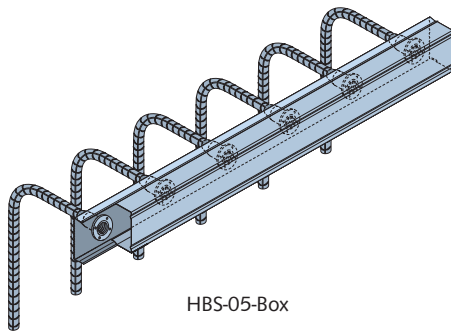

HBS-05-Box

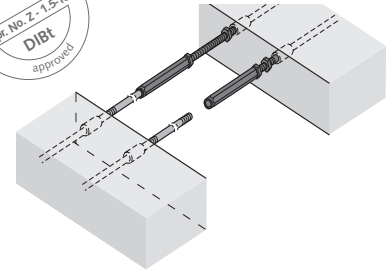


No torque wrench or special tools required – visual check is sufficient


HALFEN HSC Stud Connector

The HALFEN HSC Stud connector is a building authority approved reinforcement optimized for anchorage in concrete. Maximum exploitation of the reinforcement is possible with extremely short anchoring lengths. HALFEN HSC Anchor is especially advantageous for use in high-density reinforced areas, for example; corbels and frame corner nodes.


HSC-S
Single head
female bar




HSC-A
Single head
male bar





HSC-SD
Double
female bar



HSC-HD
Double
head bar




HSC-H
Single
head bar

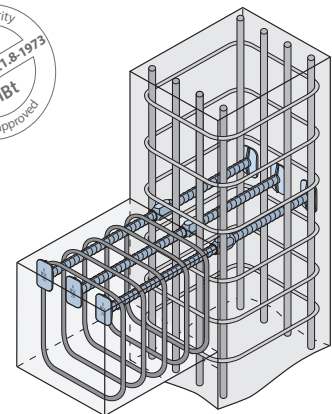


HALFEN HLB Loop Box

The HALFEN HLB Loop Box is an efficient and time saving method for connecting concrete elements. HLB Loop boxes are cast into concrete elements (e.g. wall elements) in the precast plant. The prepared concrete elements are transported to site, lifted and correctly placed with a crane; the joint between the elements is then cement-grouted.

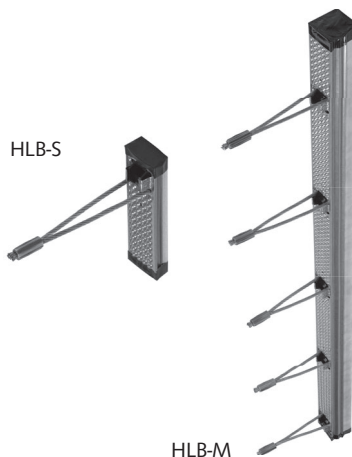

HLB-S

HLB-M

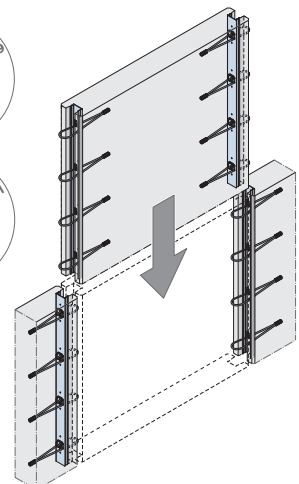

HALFEN HBT REBEND CONNECTION

References



Kö-Bogen, Düsseldorf, Germany

The Kö-Bogen complex designed by Daniel Libeskind offers commercial space for business as well as a shopping centre with restaurants etc. The Kö-Bogen (curve) is located at the end of the Königsallee in Düsseldorf, Germany.

HALFEN supplied HALFEN HBT Rebend connections for the Kö-Bogen. Other HALFEN products also used in this project include;

- HALFEN HTA Channels
- HALFEN Masonry connection channels
- HALFEN HDB Shear rails
- HALFEN HBS-05 Screw connections



Kopernikus Science centre, Warsaw, Poland

The Science centre in Warsaw, Poland, named after Nikolaus Kopernikus, is a collection of buildings with six exhibition areas.

HALFEN supplied HALFEN HBT Rebend connections for this project.



DATEV IT-Campus, Nuremberg, Germany

The DATEV IT-Campus on Fürther Strasse in Nuremberg offers 1800 workspaces including 200 individual offices and conference rooms of various sizes. The building was inaugurated in 2015.

HALFEN supplied HDB Shear rails and HBT Rebend connections for this project.

CONTACT HALFEN WORLDWIDE

HALFEN is represented by subsidiaries in the following countries, please contact us!

Austria	HALFEN Gesellschaft m.b.H. Leonard-Bernstein-Str. 10 1220 Wien	Phone: +43-1-259 6770 E-Mail: office@halfen.at Internet: www.halfen.at	Fax: +43-1-259-677099
Belgium / Luxembourg	HALFEN N.V. Borkelstraat 131 2900 Schoten	Phone: +32-3-658 07 20 E-Mail: info@halfen.be Internet: www.halfen.be	Fax: +32-3-658 15 33
China	HALFEN Construction Accessories Distribution Co.Ltd. Room 601 Tower D, Vantone Centre No. A6 Chao Yang Men Wai Street Chaoyang District Beijing · P.R. China 100020	Phone: +86-10 5907 3200 E-Mail: info@halfen.cn Internet: www.halfen.cn	Fax: +86-10 5907 32 18
Czech Republic	HALFEN s.r.o. Business Center Šafránková Šafránková 1238/1 155 00 Praha 5	Phone: +420 - 311-690 060 E-Mail: info@halfen-deha.cz Internet: www.halfen-deha.cz	Fax: +420-235-314 308
France	HALFEN S.A.S. 18, rue Goubet 75019 Paris	Phone: +33-1- 445231 00 E-Mail: halfen@halfen.fr Internet: www.halfen.fr	Fax: +33-1-445231 52
Germany	HALFEN Vertriebsgesellschaft mbH Liebigstr. 14 40764 Langenfeld	Phone: +49-2173-970-0 E-Mail: info@halfen.de Internet: www.halfen.de	Fax: +49-2173-970 225
Italy	HALFEN S.r.l. Soc. Unipersonale Via F.lli Bronzetti N° 28 24124 Bergamo	Phone: +39-035-0760711 E-Mail: tecnico@halfen.it Internet: www.halfen.it	Fax: +39-035-0760799
Netherlands	HALFEN b.v. Oostermaat 3 7623 CS Borne	Phone: +31-74-267 14 49 E-Mail: info@halfen.nl Internet: www.halfen.nl	Fax: +31-74-267 26 59
Norway	HALFEN AS Postboks 2080 4095 Stavanger	Phone: +47-51 82 34 00 E-Mail: post@halfen.no Internet: www.halfen.no	Fax: +47-51 82 34 01
Poland	HALFEN Sp. z o.o. Ul. Obornicka 287 60-691 Poznan	Phone: +48-61-622 14 14 E-Mail: info@halfen.pl Internet: www.halfen.pl	Fax: +48-61-622 14 15
Spain	HALFEN Spain PLAKABETON S.L. Polígono Industrial Santa Ana c/ Ignacio Zuloaga 20 28522 Rivas-Vaciamadrid	Phone: +34 916 669 181 E-Mail: info@halfen.es Internet: www.halfen.es	Fax: +34 916 669 661
Sweden	Halfen AB Vädursgatan 5 412 50 Göteborg	Phone: +46-31-98 58 00 E-Mail: info@halfen.se Internet: www.halfen.se	Fax: +46-31-98 58 01
Switzerland	HALFEN Swiss AG Hertistrasse 25 8304 Wallisellen	Phone: +41-44-849 78 78 E-Mail: info@halfen.ch Internet: www.halfen.ch	Fax: +41-44-849 78 79
United Kingdom / Ireland	HALFEN Ltd. A1/A2 Portland Close Houghton Regis LU5 5AW	Phone: +44 -1582- 47 03 00 E-Mail: info@halfen.co.uk Internet: www.halfen.co.uk	Fax: +44- 1582-47 03 04
United States of America	HALFEN USA Inc. PO Box 18687 San Antonio TX 78218	Phone: +1 800.423.91 40 E-Mail: info@halfenusa.com Internet: www.halfenusa.com	Fax: +1 877.683.4910
For countries not listed HALFEN International	HALFEN International GmbH Liebigstr. 14 40764 Langenfeld / Germany	Phone: +49-2173-970-0 E-Mail: info@halfen.com Internet: www.halfen.com	Fax: +49-2173-970-849

HALFEN is represented with sales offices and distributors worldwide. Please contact us: www.halfen.com

NOTES REGARDING THIS CATALOGUE

Technical and design changes reserved. The information in this publication is based on state-of-the-art technology at the time of publication. We reserve the right to make technical and design changes at any time. HALFEN GmbH shall not accept liability for the accuracy of the information in this publication or for any printing errors.

The HALFEN GmbH subsidiaries in Germany, France, the Netherlands, Austria, Poland, Switzerland and the Czech Republic are Quality Management certified according to **ISO 9001:2015**, Certificate no. 202384-2016-AQ-GER-DAKKS.

