

HALFEN FLEXIBLE FRAMING CONNECTIONS

TECHNICAL PRODUCT INFORMATION



HALFEN FLEXIBLE FRAMING CONNECTIONS

MT-FFC 17-E

FRAMING SYSTEMS

NEW!

Adjustable Cantilever

- Time saving
- Economical
- Space efficient




HALFEN

YOUR BEST CONNECTIONS


HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

Contents

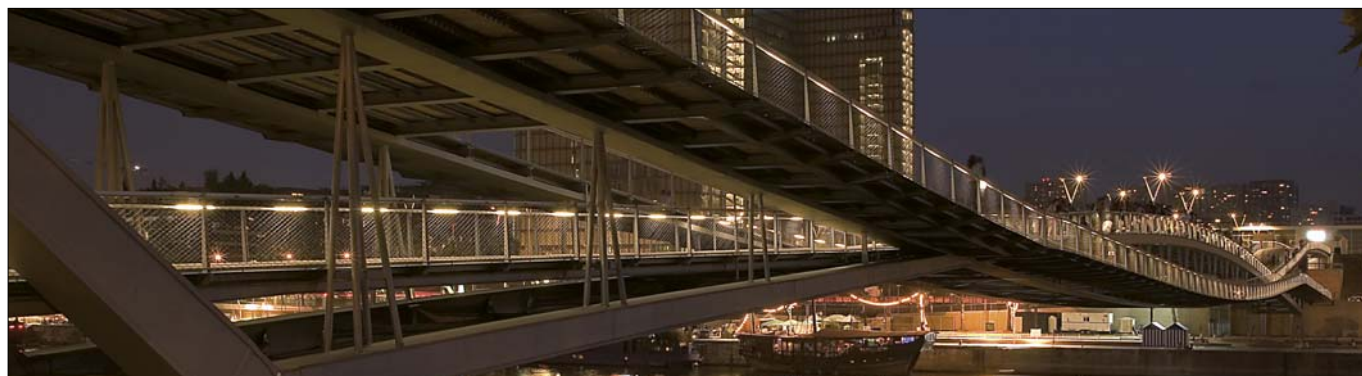


HALFEN Flexible Framework Constructions

- General overview	4
- European standards/Calculation method	5
- Application examples	6
- Designing with HALFEN – How to start your project	7
- System 52 – for heavy duty requirements	8-10
Framing Channels, bolts, fittings, channel ring	
- System 41 – for medium duty requirements	11-22
Framing Channels, bolts, fittings, channel ring	
NEW in System 41 – The HALFEN Adjustable Cantilever	16-22
- System 36 – for light duty requirements	23-24
Framing Channels, bolts, fittings	
- System 28 – for light duty requirements	25
Framing Channels, bolts, fittings, channel ring	
- Framework constructions with system 28/36	26

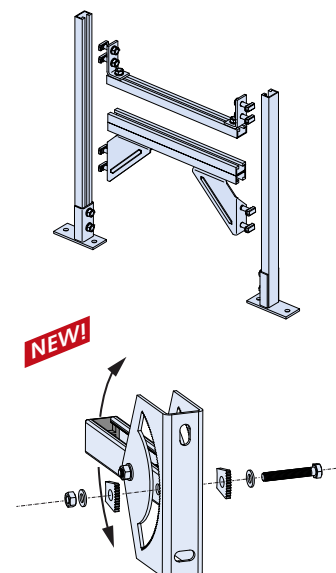

HALFEN Cantilevers

- Overview Cantilever brackets	27
- Cantilever brackets – Type 52	28-29
- Cantilever brackets – Type 41	30-31
- Accessory Bracket KON-Z for 41/36/28 cantilevers	31
- Cantilever brackets – Type 36	32-33
- Cantilever brackets – Type 28	33



Additional information for **all HALFEN Framing channels** and **HALFEN Bolts**, for example, on bearing loads and notes on dimensioning and material, is content of Technical Product Information **MT-FBC-E "HALFEN Flexible bolt connections, "**.

Available for download as a pdf file at

www.halfen.com – Downloads – Brochures – Catalogues – Framing Systems.




HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

Contents




HALFEN Framing System Accessories

- Beam clamp/Clamp plate	34-35
- Nuts, washers	36
- Threaded Rod, Hexagon Bolts, Coupler Sleeves, Ring nuts	37
- Vibration absorber (with example airstream channel)	38
- Channel end caps, channel cover strips	39




Pipe clamps, pipe supports

- Type selection	40
- Pipe clamp Alpha	41
- Pipe clamp assembly set	42
- Pipe clamp Beta	43
- Pipe clamp Gamma	44
- Pipe clamp Delta	45
- Pipe supports	46
- Accessories	47-49

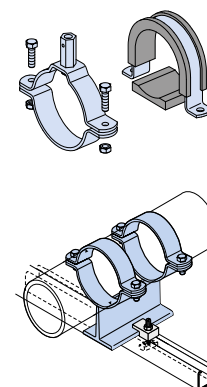

Appendix

- Pipe weights and support spacing	50
- Pipe dimension	51-52
- Pipe fixings under bridges	53
- Specification texts	54-55
- Addresses/contacts	56




HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

General Overview


Flexible framework constructions offer a whole range of benefits:

- quick assembly of supporting frames
- on-site adjustable, due to flexible assembly system in channel slots
- existing framework constructions are easily altered or up-graded
- corrosion protection of all equipment is not compromised by bolting
- no meticulous preliminary planning of drilling templates necessary
- construction tolerances can be compensated on-site
- large selection of material from low to high loads



With HALFEN Framing channels you avoid:

- time consuming planning of inflexible bolted fixings
- costly corrosion protection work on completed or existing structural components
- costly manufacturing of bolting
- preliminary or subsequent mechanical work on-site i.e. drilling and welding

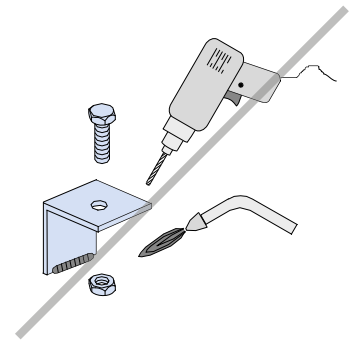

Quality

Quality is an outstanding characteristic of our products. HALFEN materials and products are subject to stringent quality controls.

A quality audit by the DNV GL confirmed that our quality management system fulfils the requirements of ISO 9001:2015.



Additional product information

You can find more information, for example, on bearing loads and notes on dimensioning and material, for all HALFEN Framing channels in our catalogue **MT-FBC-E "HALFEN Flexible bolt connections**, Technical Product Information".

Available for download as a pdf file at **www.halfen.de – Downloads – Brochures – Catalogues – Framing Systems.**



HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

General Overview

European standards EN 1090 / EN 1993

The new EN 1090 series of standards replace the previous DIN 18800-7 Standard, regulating execution of steel structures and manufacturing qualifications.

European standard EN 1090-1 specifies requirements for conformity assessment (CE marking) of structural components which will be placed on the European market as construction products. The conformity assessment covers production characteristics and where appropriate, the structural design characteristics.

The EN 1090-2 Standard regulates the requirements applicable to the execution of steel structures. This standard applies to structures that are verified according to the appropriate section of EN 1993 (EC3).

The phase-out period for DIN 18800-7 ended on the 30th of June 2014. Basis for the evaluation of conformity of steel construction products is the system of assessment of conformity 2+ according to Construction Products Regulation (CPR) EU No. 305/2011.



EN 1090-1, EN 1090-2
2499 – CPR-0113070-00-01



The CE marking confirms conformity with the declared performance of HALFEN products and with all relevant European harmonized standards in the European Union.

HALFEN Framing channels are also subject to these regulations. To meet CE evaluation obligations the marked products are statically verified in accordance with EN 1993 and the principal performance characteristics are detailed in the respective Declaration of Performance, CONF-DOP_KON. CE marking is mandatory from the 1st of July 2014 when distributing load bearing metallic construction products in the European market.

HALFEN is certified by the notified Body ZDH-ZERT GmbH. Apart from production, the certification includes the method of calculation required by the HALFEN Engineers and their respective qualifications.

Design method

The European standard EN 1993 was created with the intention to establish uniform calculation methods for steel structures across Europe.

However, because these calculation methods have not yet been adopted in all industries we have decided to include two sets of values for cantilever load capacities in the following tables.

- working loads will continue to be defined as "allow. F" and
- design values of the resistance will be defined as „F_{Rd}“.

The term "design value" is taken from the current applicable standards, for example EN 1993 (EC3), with new safety concept, and must be strictly differentiated from the term "allowable load". The European standard which is based on the so called "partial safety factors" is applied to material resistance as well as to the action (load).

The following verification is required:

$$F_{Ed} \leq F_{Rd}$$

F_{Ed} = calculation value for action

F_{Rd} = design value for resistance

The traditional, deterministic safety concept however, is based on the method of using a global safety factor for material resistance and is known as the "allowable load method" or "allowable tension method". These methods are used in mechanical and apparatus engineering. In these cases the allowable values for load capacity are calculated. Verification is as follows:

$$F \leq \text{allow. F}$$

F = load on the structure

allow. F = allowable load

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

Application Examples

Flexible framework construction

Standardised complete system consists of:




HALFEN Framing channels





HALFEN Bolts / Locking plates




HALFEN Connection elements

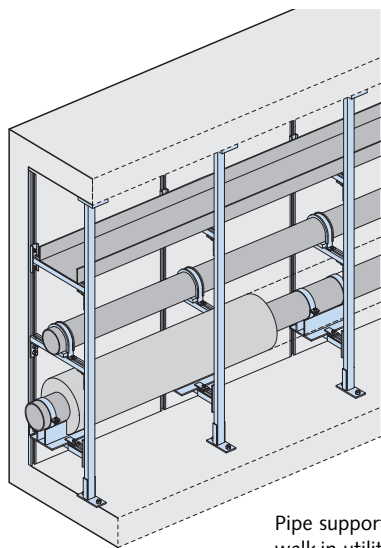


Pipe support in walk-in utility tunnels.

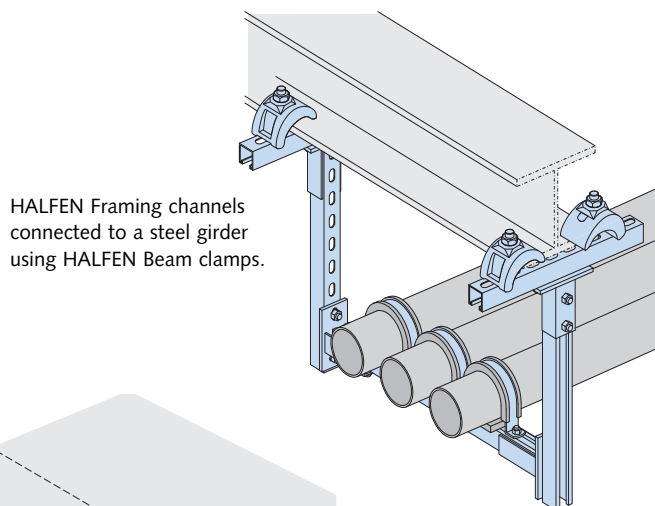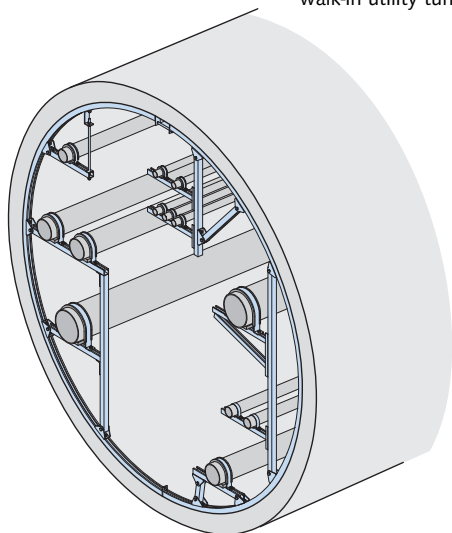

HALFEN Framing channels connected to a steel girder using HALFEN Beam clamps.

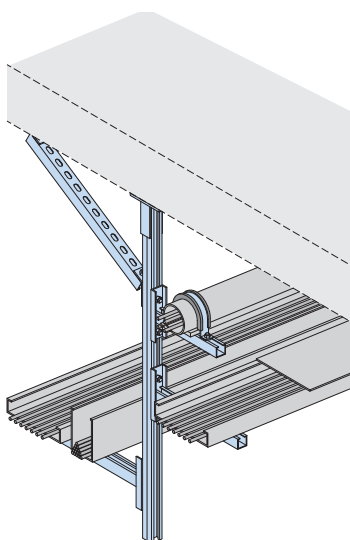

Pipes and cable-trays with height adjustable cantilever brackets.

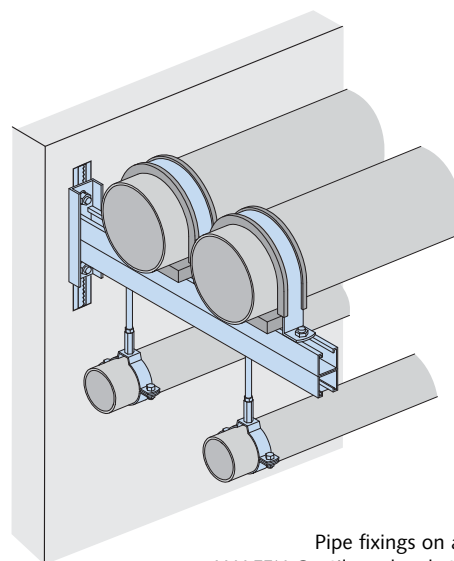

Pipe fixings on a HALFEN Cantilever bracket.

HALFEN Channels can be fixed to numerous types of support structures:

- clamped on sectional steel supports
- welded onto structural steel members
- bolted onto HALFEN Cast-in channels
- fixed onto concrete or brickwork using dowels, etc.

HALFEN Bolts and locking plates can be inserted anywhere on the framing channels in the profile slot allowing a quick, safe and fully adjustable connection of components.


HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

HALFEN offers complete design services

Designing with HALFEN support

Our technical department starts with your configuration sketch, including information on the culvert radius R [mm].

From your sketch...

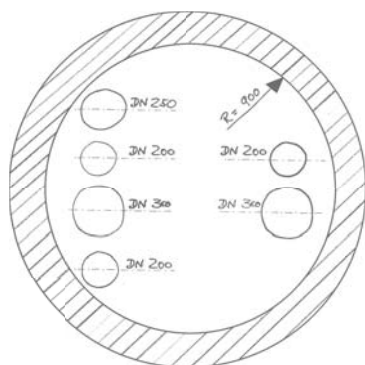

..to HALFEN detailed design and realisation

Our pipe support systems are designed and manufactured from a mix of standard and custom elements to suit the specific of your project.

The HALFEN Engineering Support Team always endeavour to find the best balance between safety and economy. This is done in conjunction with the customer, with whom there is an open dialogue throughout the design process.


For more information please contact HALFEN

Please see the back page of this catalogue for regional contact addresses or www.halfen.com


Serrated framing channel

Alternatively serrated anchor channel


Example for hinged beam



Construction example for a medium duty framing channel ring HCS-SRI
Available in hot-dip galvanized
[Available in stainless steel](#)

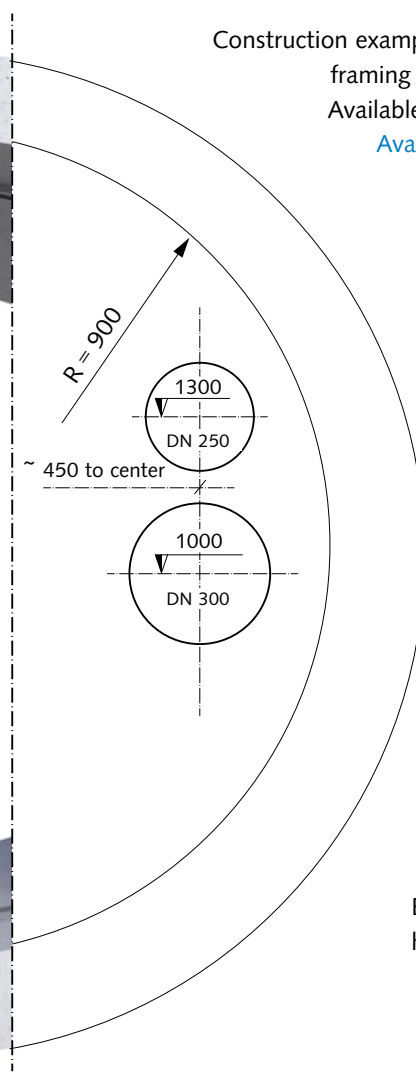

Example for hinged support





HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

System 52 – Heavy Duty

System 52

The framing system for **heavy loads** consists of the hot-rolled channel HM 52/34 and 10 connection elements.
For greater bending requirements the double channel HM 52/34 D is available.
System 52 is also available as a channel ring system, which is made to the customer specifications (see page 10).

Framing channel HM 52/34 hot-rolled




Double channel
HM 52/34 D
on request

HM 52/34		
Material	Order no. 0280.	Length [mm]
WB	190-00002	6070
FV	190-00003	
A4	190-00001	

Channel data, measurements, load bearing capacities, etc. can be found in the Technical Product Information **MT-FBC-E "HALFEN Flexible bolt connections"** (see page 17).


Accessories

HPE 52/34 Channel end caps
PA-22 Channel cover




see page 39

VUS 52/34 Washers



see page 36

SDM 41/8 Vibration absorber



see page 38




HALFEN Bolt **HS 50/30**,
HALFEN Bolt with nib **HSR 50/30**
Locking plate **GWP 50/30**

Bolt data, measurements, load bearing capacities, etc. can be found in the Technical Product Information **"HALFEN Flexible bolt connections" MT-FBC** (see page 21).



Connection fittings HVT 52

Standard dimensions [mm]:
Unless otherwise stated, the following dimensions apply to all connection elements for HVT 52.



Recommended HALFEN Bolts:
HS 50/30 - M16 × 40 and
HSR 50/30 - M16 × 40


Connecting elements – System 52

FV = hot dip galvanized		A4 = stainless steel W1.4571/1.4401	
Article name	Order no. 0312.040-	Article name	Order no. 0312.040-
HVT - 52 - 1 - FV	00001	HVT - 52 - 1 - A4	00011
HVT - 52 - 2 - FV	00002	HVT - 52 - 2 - A4	00012
HVT - 52 - 3 - FV	00003	HVT - 52 - 3 - A4	00013
HVT - 52 - 4 - FV	00004	HVT - 52 - 4 - A4	00014
HVT - 52 - 5 - FV	00005	HVT - 52 - 5 - A4	00015
HVT - 52 - 6 - FV	00006	HVT - 52 - 6 - A4	00016
HVT - 52 - 7 - FV	00007	HVT - 52 - 7 - A4	00017
HVT - 52 - 8 - FV	00008	HVT - 52 - 8 - A4	00018
HVT - 52 - 9 - FV	00009	HVT - 52 - 9 - A4	00019
HVT - 52 - 10 - FV	00010	HVT - 52 - 10 - A4	00020


HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

System 52 - Heavy Duty


Application examples




HVT 52-1




HVT 52-2




HVT 52-3




HVT 52-4




HVT 52-5




HVT 52-6




HVT 52-7



HVT 52-8 ①



HVT 52-9





HVT 52-10

① Assembly note for fitting system HVT 52-8

Because of their unique shape two HVT 52-8 elements can be installed directly adjacent to each other when used for channel-cross connections on the same level.

Note: Each detail shows only one of many possible applications.

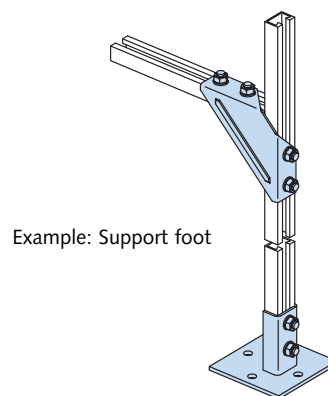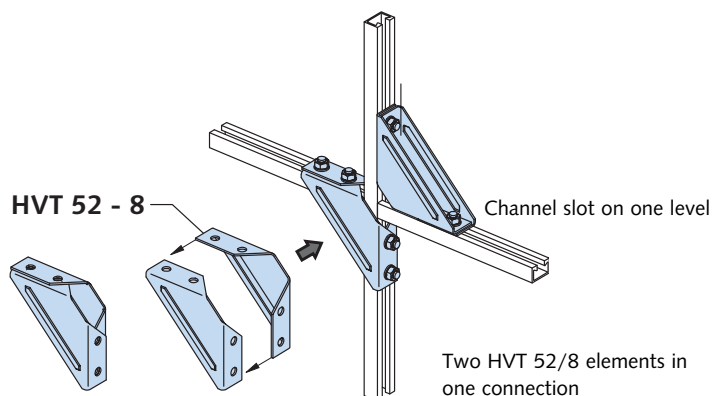

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

System 52 – Heavy Duty – Construction Examples



Framework constructions

Pre-assembled components

HALFEN System 52 is used for heavy component assembly, e.g. in cable ducts or utility tunnels.

Base profiles are the framing channels HM 52/34 and for larger bending requirements HM 52/34 D.

The framing channels and connection fittings are available hot-dip galvanized, or in A4 stainless steel.

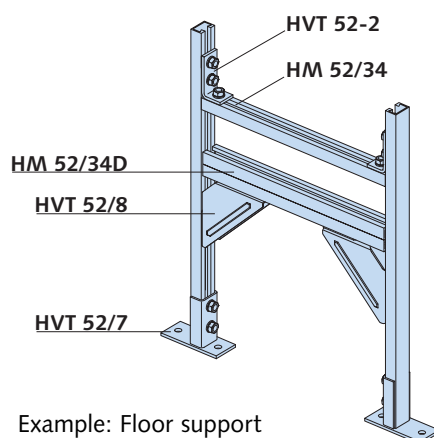
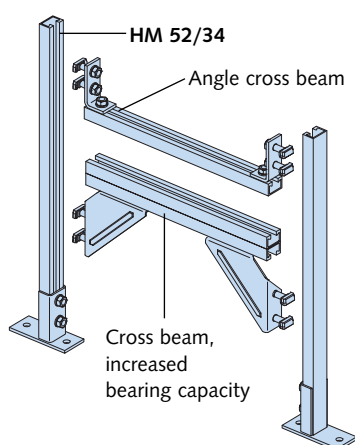


Example: Floor support

Frames are designed by our engineering team, in accordance with the customer's requirements, and are made to order from stock material.

Channel ring

Example: Channel ring for utility tunnels (eg. in culverts)

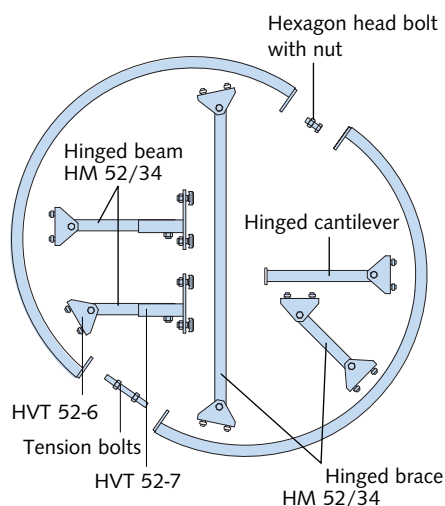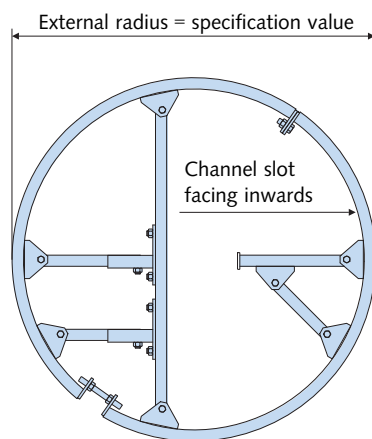

Channel ring systems are designed by our engineering team in conjunction with the customer. Rings are made to order, primarily from material available from stock.

Recommended HALFEN Bolts for assembling fitting system HVT-52:

HS 50/30 M16 x 40 FV 4.6
0350.090-00041

HSR 50/30 M16 x 40 FV 8.8
0351.090-00001

(hot-dip galvanized finish)

HS 50/30 M16 x 40 A4-50
0350.090-00006
(stainless steel finish)

Delivery times on request.
Dowel fixing set if required;
please order item separately.

If you have any further questions:

Our technical department and our field support technicians will gladly advise and support you with solutions when using HALFEN Framing systems.

For more information contact HALFEN

Please see the back page of this catalogue for regional contact addresses or at www.halfen.com

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS



HALFEN System 41 – Medium Duty

System 41



The framing system for **medium loads** can be used in combination with all HALFEN 41 series framing channels. System 41 is also available as a channel ring system, which can be made to customer specifications (see page 15).





HM and HL 41/41
cold-rolled

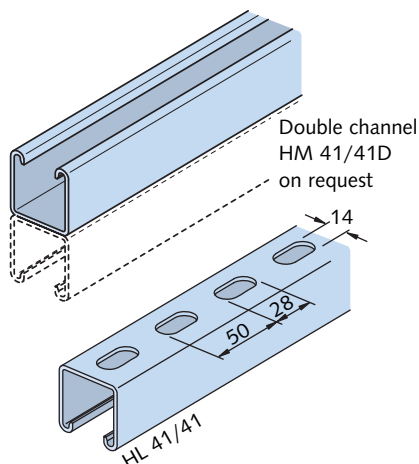

HZM and HZL 41/41
cold-rolled, serrated

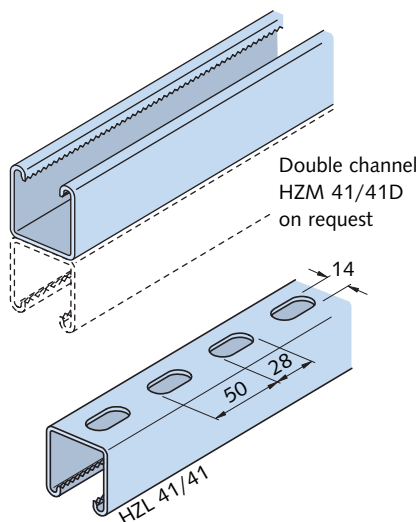

HM and HL 41/22
cold-rolled

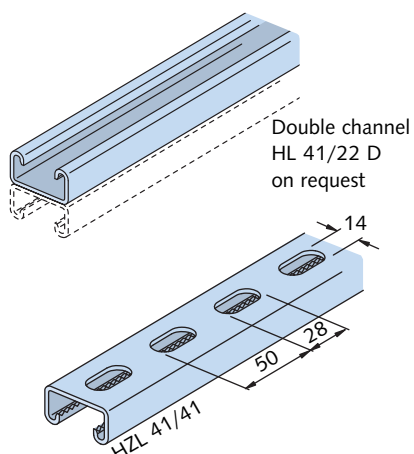

HM 41/41 and HL 41/41		
Material	Order no.	Length [mm]
HM 41/41 0280.		6000
WB	080-00001	
SV	080-00002	
FV	080-00003	
A4	080-00004	
HL 41/41 0281.		
WB	010-00001	
SV	010-00003	
FV	010-00002	
A4	010-00004	
HM 41/41 D 0280.		
WB	150-00001	
FV	150-00003	
A4	150-00002	

HZM 41/41 and HZL 41/41		
Material	Order no.	Length [mm]
HZM 41/41 0284.		6000
WB	010-00001	
FV	010-00002	
A4	010-00003	
HZL 41/41 0283.		
WB	010-00001	
FV	010-00002	
A4	010-00003	
HZM 41/41 D 0284.		
WB	030-00001	
FV	030-00002	
A4	030-00003	

HM 41/22 and HL 41/22		
Material	Order no.	Length [mm]
HM 41/22 0280.		6000
WB	120-00001	
SV	120-00002	
FV	120-00003	
A4	120-00004	
HL 41/22 0281.		
WB	020-00001	
SV	020-00003	
FV	020-00002	
A4	020-00004	
HM 41/22 D 0280.		
WB	160-00001	
FV	160-00002	
A4	160-00003	

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS



System 41 – Medium Duty

System 41



HZM and HZL 41/22

cold-rolled, serrated

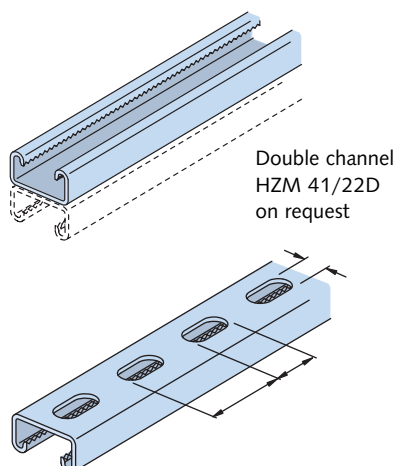

HZM 41/22 and HZL 41/22

Material	Order no.	Length [mm]
HZM 41/22 0284.		6070
WB	020-00001	
FV	020-00002	
A4	020-00003	
HZL 41/22 0283.		6000
WB	020-00001	
FV	020-00002	
A4	020-00003	
HZM 41/22 D 0284.		6070
WB	040-00001	
FV	040-00002	
A4	040-00003	


Channel data, measurements, load bearing capacities, etc. can be found in the Technical Product Information MT-FBC-E "HALFEN Flexible bolt connections" (see pages 33-34 and 38-40).

Accessories


HPE 41/41 Channel end caps

PA - 41 Channel cover


SDM 41/8 Vibration absorber



see page 39



see page 39



see page 38



HALFEN Bolt HS 41/41

HALFEN Bolt serrated/toothed HZS 41/41

HALFEN Bolt serrated/toothed HZS 41/22

Locking plate GWP 41/41

Locking plate with short spring GWP 41/41 SN

Locking plate with long spring GWP 41/41 SH


Bolt data, measurements, load bearing capacities, etc. can be found in the Technical Product Information MT-FBC-E "HALFEN Flexible bolt connections" (see page 41-42).



Connection fittings HVT 41

Standard dimensions [mm]:

Unless otherwise stated, all HVT 41 connectors are made with the following typical dimensions.



Recommended HALFEN Bolts:

HS 41/41 - M12 × 35 FV and A4-70,

HZS 41/41 - M12 × 30, ZL

(ZL = zink flke coating)

HZS 41/22 - M12 × 35 FV 8.8 or

GWP 41/41 - F M12 FV or A4

with HSK M12 × 35 FV or A4

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS


System 41 – Medium Duty

Application examples

Connecting elements – System 41

Article name	Order no.	
	FV = hot-dip galvanized	A4 = stainless steel
	0312.	0312.
HVT 41 - 08	030-00001	
HVT 41 - 10	030-00002	030-00049
HVT 41 - 11 ①	030-00003	
HVT 41 - 13	030-00004	030-00051
HVT 41 - 15	030-00005	030-00052
HVT 41 - 19	030-00006	
HVT 41 - 22	030-00008	030-00054
HVT 41 - 23 ①	030-00009	
HVT 41 - 25	030-00010	030-00056
HVT 41 - 26	030-00011	030-00057
HVT 41 - 27	030-00012	030-00058
HVT 41 - 31	030-00013	
HVT 41 - 33	030-00014	
HVT 41 - 37	030-00018	
HVT 41 - 40	030-00019	
HVT 41 - 41L	030-00020	
HVT 41 - 41R	030-00021	
HVT 41 - 43	030-00022	
HVT 41 - 44	030-00023	
HVT 41 - 45	030-00024	
HVT 41 - 46	030-00025	030-00071
HVT 41 - 47	030-00026	030-00072
HVT 41 - 49	030-00027	
HVT 41 - 57	030-00029	030-00074
HVT 41 - 58	030-00030	030-00075
HVT 41 - 65	030-00032	
HVT 41 - 66	030-00033	
HVT 41 - 67	030-00034	
HVT 41 - 68	030-00035	030-00079
HVT 41 - 73	030-00037	
HVT 41 - 75 ①	030-00038	
HVT 41 - 77	030-00039	030-00082
HVT 41 - 78	030-00040	030-00083
HVT 41 - 84	030-00041	030-00084
HVT 41 - 97	030-00047	

① on request

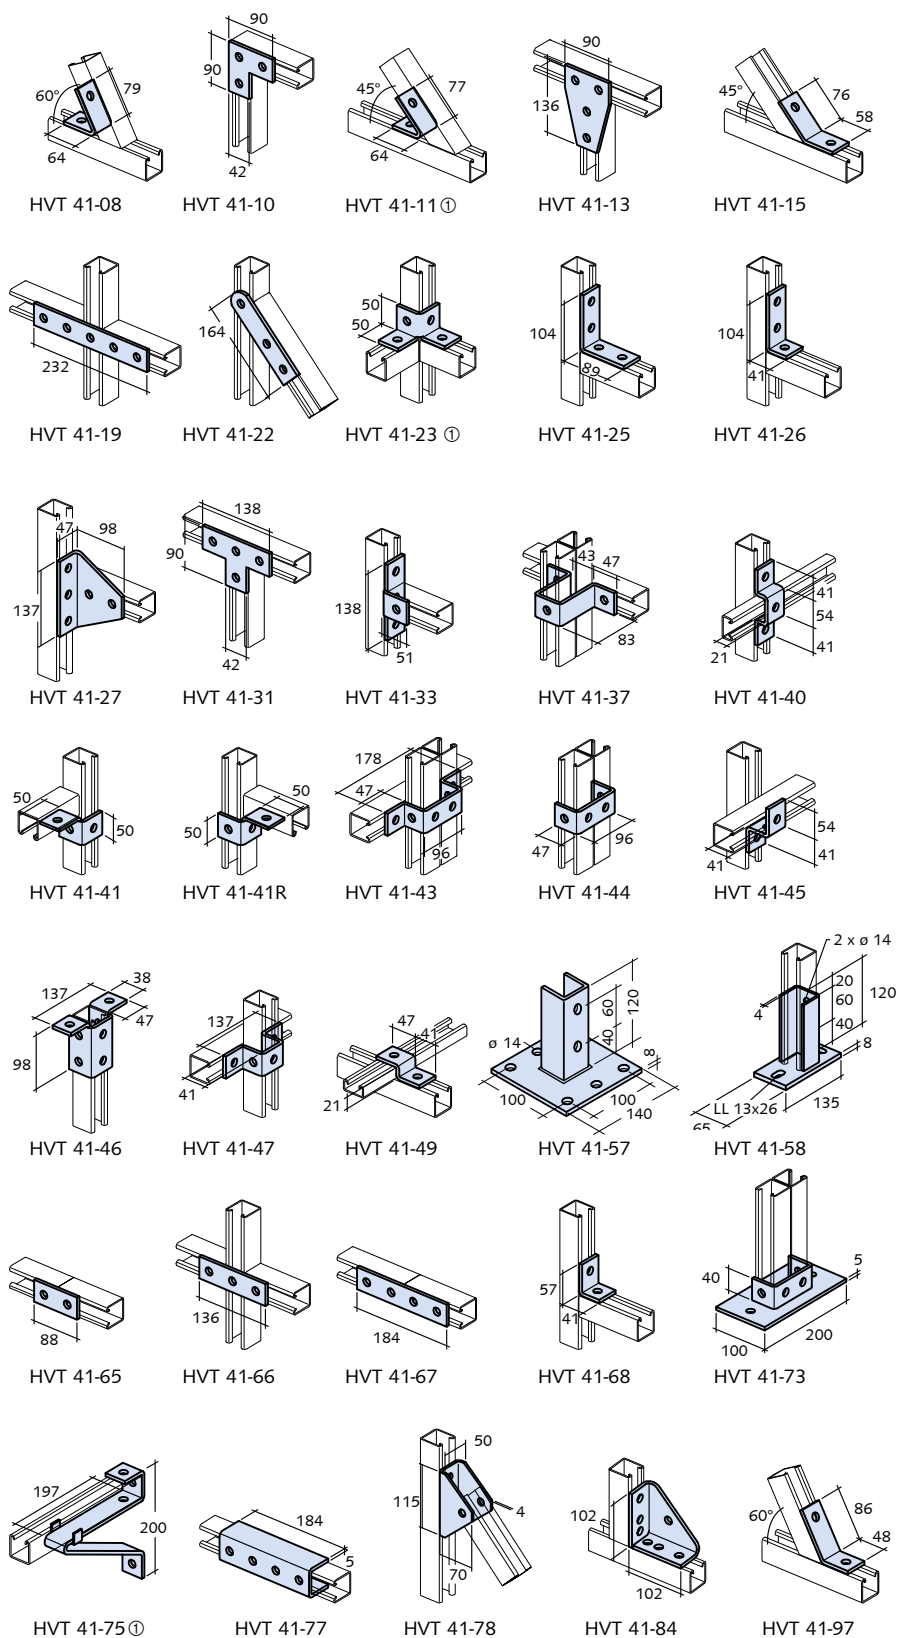


Note: Each drawing shows only one of many possible applications.

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

Adjustable Framework Construction – Accessories for System 41

U-Clamp-Plate KUS – 41 System


KUS U-clamp-plates fit on all
HALFEN 41 System channels



Assembly diagram

e.g. channel 41/62

Threaded rod
locking plate 41/41
KUS




U-clamp-plate KUS	
Type	Order no.
KUS FV hot-dip galvanized	0314.000-00001
KUS A4 stainless steel	0314.000-00002

Beam clamps – 41 System

Beam clamps for 41 series; used in pairs

HVT 41 - 85

for channels 41/41, 41/22 and 41/22D




Load cap. per clamp pair: **4.55 kN**
Clamping thickness: max. 22 mm

HVT 41 - 85	
Type	Order no.
HVT 41 - 85 - FV	0312.030-00042
HVT 41 - 85 - A4	0312.030-00085
FV = hot-dip galvanized A4 = stainless steel	

HVT 41 - 86

for channels 41/41D, 41/62 and 41/83




Load cap. per clamp pair: **4.55 kN**
Clamping thickness: max. 22 mm

HVT 41 - 86	
Type	Order no.
HVT 41 - 86 - FV	0312.030-00044
HVT 41 - 86 - A4	0312.030-00086
FV = hot-dip galvanized A4 = stainless steel	

HVT 41 - 89

for all channels in the 41 series



Load cap. per clamp pair: **3.0 kN**
Load cap. per clamp pair for channel
HLL 41/41: **2.5 kN**
Clamping thickness: max. 22 mm

HVT 41 - 89	
Type	Order no.
HVT 41 - 89 - FV	0312.030-00046
HVT 41 - 89 - A4	on request
FV = hot-dip galvanized A4 = stainless steel	

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

System 41 – Medium Duty – Construction Example

Channel ring

Channel ring HCS - 41 - SRI:

Base profiles for channel ring system 41:

HM 41/22 for finish **FV** (hot-dip galvanized) or

HZM 41/22 serrated, for finish in **A4** (stainless steel)

Locking plates for assembly of fitting system HVT - 41:

GWP 41/41, F M12 FV (hot-dip galvanized) 0322.020-00001

GWP 41/41, F M12 GV (electroplated) 0322.020-00002

GWP 41/41, F M12 A4 (stainless steel) 0322.020-00003

Note: Minimum external radius;
channel HM 41/22: $R_a \geq 750$ mm


Channel ring systems are made to customer specifications, supported by our engineering team and made, including assembly material, by our production team.

Our technical department requires detailed drawings, as well as information on the required external radius R_a [mm]. Alternatively the corresponding order numbers are listed in the table below:

Article name and order no.	
Material: FV = hot-dip galvanized	Order no. 0304. ...
HCS - 41 - SRI - P - FV Radius R_a	010-00002 ①
HCS - 41 - SRI - M - FV	020-00002
Material: A4 = stainless steel	
HCS - 41 - SRI - P - A4 Radius R_a	010-00001 ①
HCS - 41 - SRI - M - A4	020-00001
① Always specify external radius R_a [mm] when ordering	

Delivery times on request.

If necessary, dowel fixing sets have to be ordered separately.


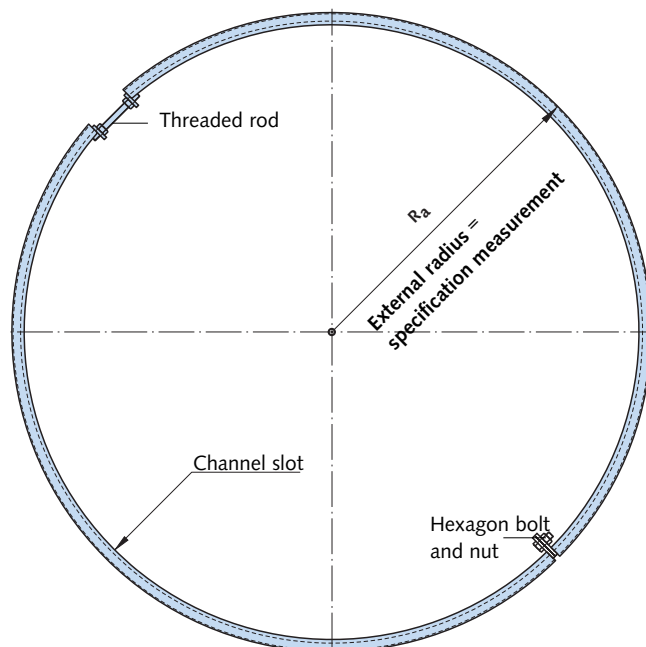


HCS - 41 - SRI - P Channel order includes:
2 channel ring segments made from channel HM 41/22, curved with external radius R_a [mm] = order length, with welded-on head plates

HCS - 41 - SRI - M Set includes:
Installation set
1 × Threaded rod M12 × 120
1 × Hex. head bolt HSK - M12 × 25
3 × Hexagonal nut M12

Pre-assembled components for channel ring systems


HALFEN delivers premounted hinged beams and supports for supply and disposal pipes, manufactured by customer specification. Further Information can be found at page 7.



HALFEN Adjustable Cantilever

The advantages at a glance

A Revolution in tunnel pipe support. The HALFEN Adjustable Cantilever combines the established high load bearing of the medium duty system with much faster installation. Specifically designed for tunnels or other areas with a curved or inclined substrate. It is not necessary to know the cantilever angle at the time of design.

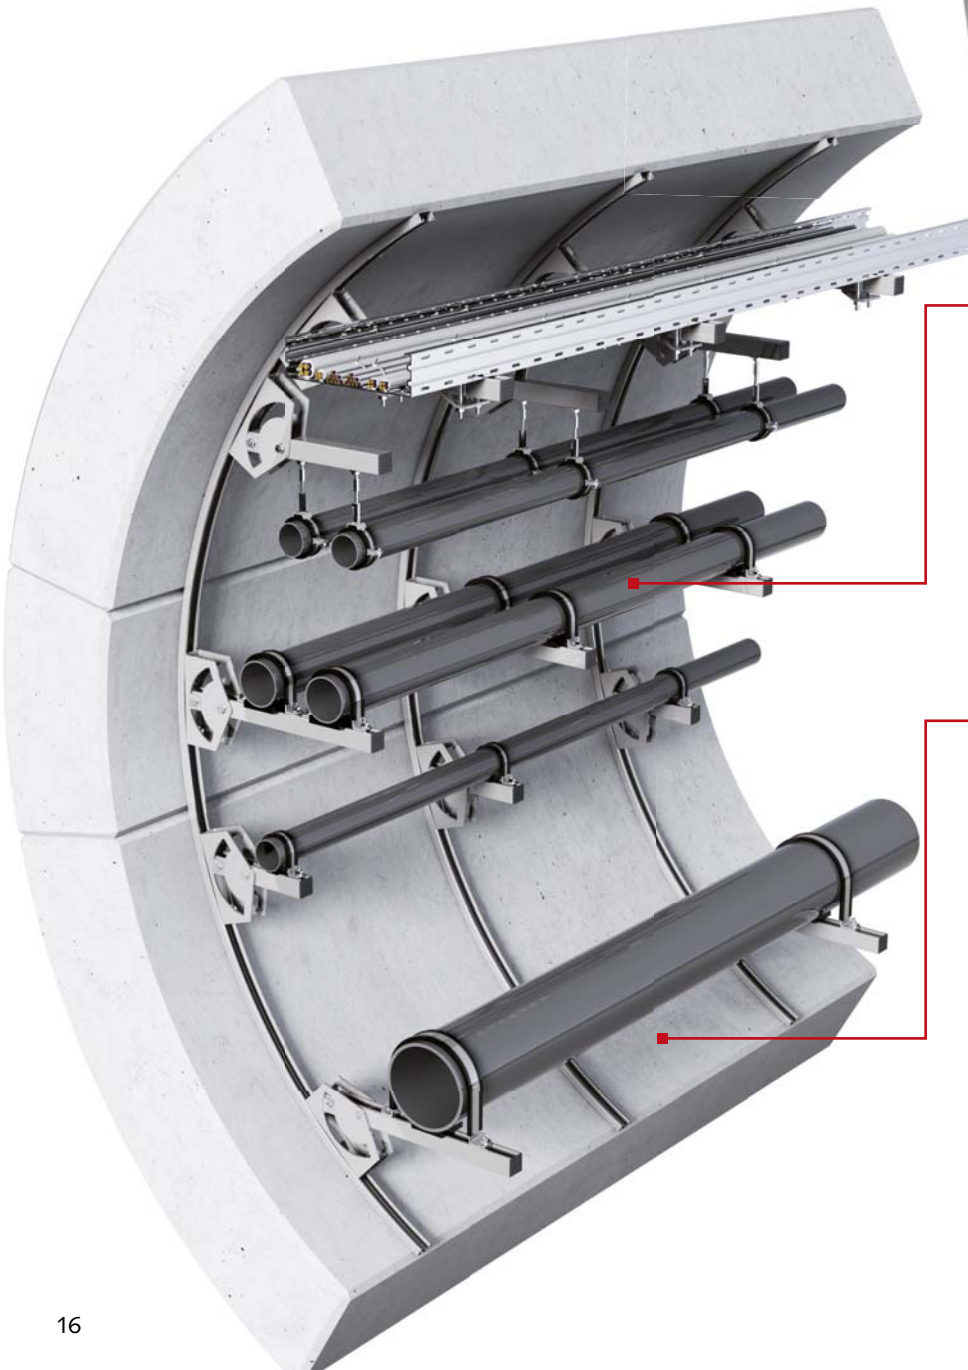

One part for all locations, dramatically reduced complexity

- suitable for pipe clamps, shoes and cable trays
- can be used for laid or suspended pipes
- takes up site tolerance. Cope with changes due to site conditions

No custom cantilevers required, no angles to measure

- simplified design
- no risk of custom cantilevers not fitting
- rapid delivery of stock item = no custom fabrication lead time



HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

System 41 – Medium Duty – Adjustable Cantilever


NEW!

Introduction

The KON 41/V cantilever is freely adjustable from an angle of -56° to $+56^\circ$, and can be fixed to curved cast-in channel or surface-mounted framing channel or directly to the tunnel wall – including curved or inclined surfaces.

KON 41/V is made without welding, and is composed of a HALFEN Framing channel 41/41 cantilever arm and an adjustable HVT rear bracket.

The HVT rear bracket may also be used separately as a fixed support connection element in the HALFEN 41 Framing Channel System to restrain the rotation of a beam, unlike hinge connection elements.

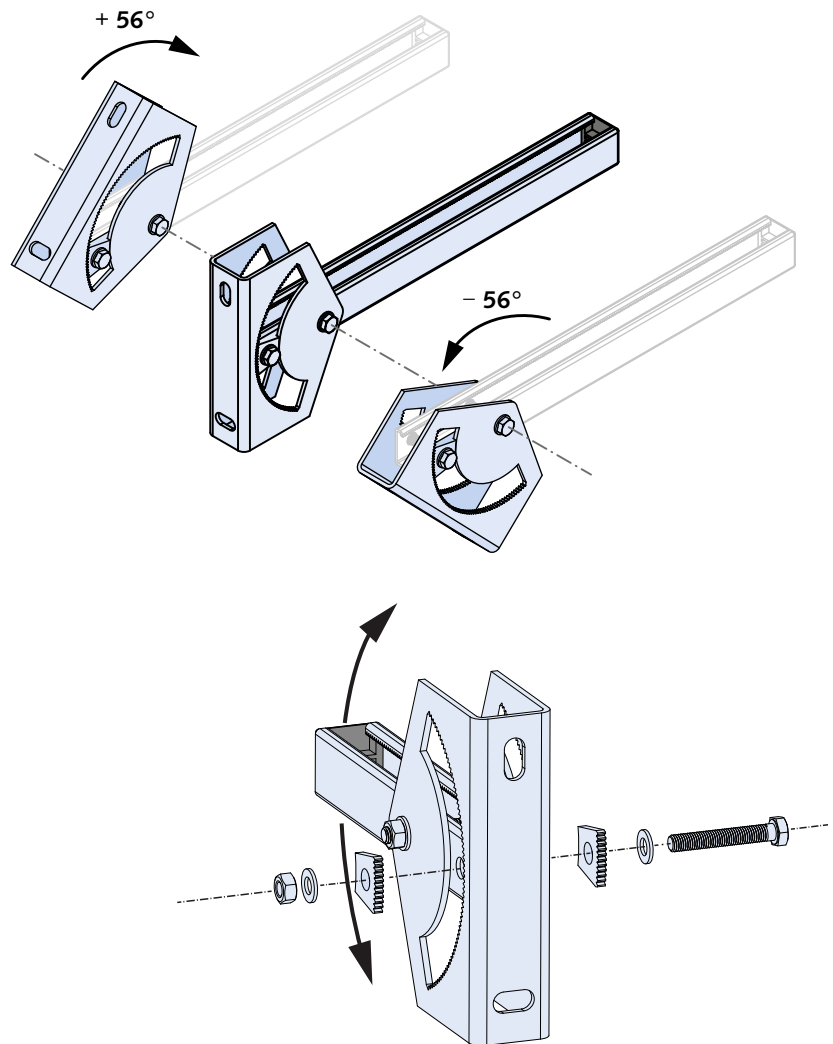

The cantilever is available in three standard lengths. Custom lengths are also available.

The KON 41/V cantilever is easily set to the correct angle by loosening the serration plates. The bracket is set to the required angle, then the assembly is simply re-tightened.

Tried and tested – HALFEN Cast-in or Framing channel with HALFEN Bolts.

The ideal team for fastening in any environment.

For cast-in channels please refer to our catalogue "Technical Product Information HALFEN Cast-in channel".






HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

System 41 – Medium Duty – Adjustable Cantilever

NEW!

Cantilever bracket – Type 41/V

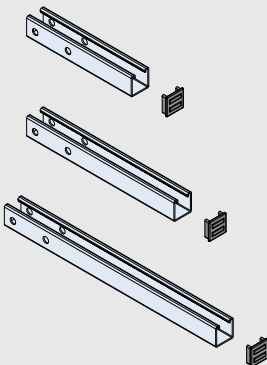KON 41/V Product overview			
	Order no.	Item name	Item description
Sets - Assembled			
	0310.300-00001	KON 41/ V FV L=245 mm Adjustable Cantilever. complete, assembled.	Complete set. Fully assembled.
	0310.300-00002	KON 41/ V FV L=345 mm Adjustable Cantilever. complete, assembled.	Complete set. Fully assembled.
	0310.300-00003	KON 41/ V FV L=495 mm Adjustable Cantilever. complete, assembled.	Complete set. Fully assembled.
Components - for assembly			
	0310.310-00001	KON 41/ V- FV Rear bracket set of Adjustable Cantilever - with toothed plates and assembly bolts.	Requires arm for assembly.
	0310.320-00001	KON 41/ V-FV 245 mm arm only of Adjustable Cantilever	Arm only. Requires rear bracket set for assembly.
	0310.320-00002	KON 41/ V-FV 345 mm arm only of Adjustable Cantilever	Arm only. Requires rear bracket set for assembly.
	0310.320-00003	KON 41/ V-FV 495 mm arm only of Adjustable Cantilever	Arm only. Requires rear bracket set for assembly.
Spares			
	0310.330-00001	KON 41/V- FV spare toothed plate for adjustable cantilever	FV Toothed plate. Single spare, if required
Components and sets in stainless steel (A4) are available on request			

FV = hot-dip galvanized

A4 = stainless steel

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

System 41 – Medium Duty – Adjustable Cantilever



NEW!

Cantilever bracket – Type 41/V


KON 41/V

The KON 41/V is the latest addition to the Halfen family of adjustable fixing products, providing the designer with elegant, load-tested solutions, while also giving the contractor a rapid and reliable install, which allows for site tolerances.

A design example is given in the catalogue see page 20-22.

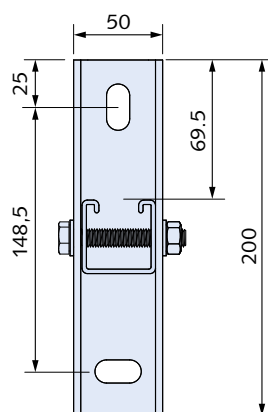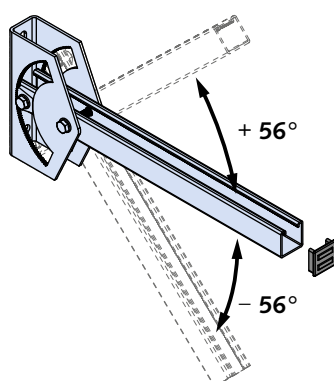

Maximum allowable and design forces					
Length L	Load				
[mm]	F [kN]	F_1	F_2	F_3	F_4
257	allow. load	5.55	2.89	2.77	1.85
	F_{Rd}	7.76	4.04	3.88	2.59
357	allow. load	3.44	1.72	1.72	1.15
	F_{Rd}	4.82	2.41	2.41	1.61
507	allow. load	2.15	1.07	1.07	0.72
	F_{Rd}	3.00	1.50	1.50	1.00

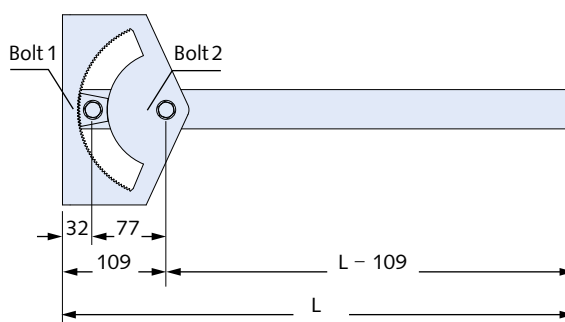

Cantilever disposition [mm]

Connector reaction forces for the maximum allowable and design forces					
Length L	Load				
[mm]	F [kN]	F_1	F_2	F_3	F_4
257	allow. load F_Z	6.83	4.99	6.83	6.83
	$F_{Z,Rd}$	9.57	6.99	9.57	9.57
	allow. load F_Q	5.55	2.89	5.55	5.55
	$F_{Q,Rd}$	7.76	4.04	7.76	7.76
357	allow. load F_Z	5.40	4.14	5.40	5.40
	$F_{Z,Rd}$	7.56	5.79	7.56	7.56
	allow. load F_Q	3.44	1.72	3.44	3.44
	$F_{Q,Rd}$	4.82	2.41	4.82	4.82
507	allow. load F_Z	4.45	3.66	4.45	4.45
	$F_{Z,Rd}$	6.23	5.13	6.23	6.23
	allow. load F_Q	2.15	1.07	2.15	2.15
	$F_{Q,Rd}$	3.00	1.50	3.00	3.00


HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

System 41 – Medium Duty – Adjustable Cantilever

NEW!

KON 41/V Calculation Example

Calculation of the adjustable cantilever KON 41/V is based on the static calculation models as shown in the figures. The example is based on a cantilever with two mounted pipes of different diameter and a cable tray. The example is calculated with design values.

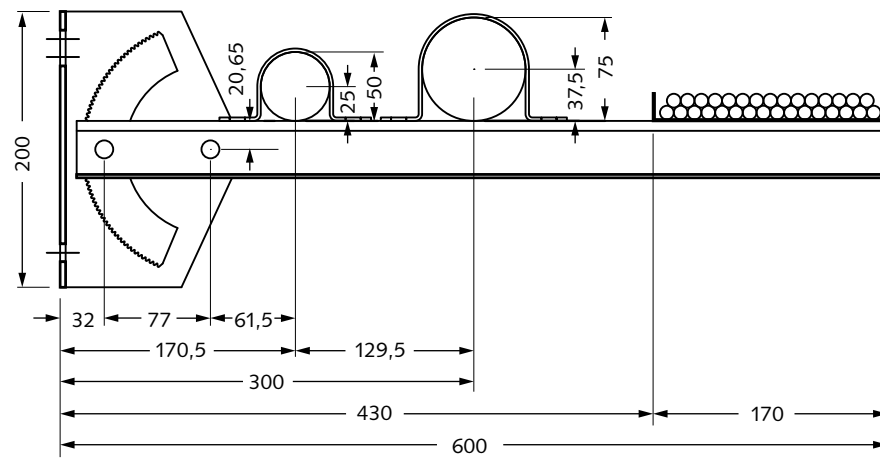

Loads:

$$\begin{aligned} F_{Z,1} &= 0,95 \text{ kN} \\ F_{X,1} &= 0,10 \text{ kN} \\ F_{Z,2} &= 1,90 \text{ kN} \\ F_{X,2} &= 0,20 \text{ kN} \\ q_z &= 1,10 \text{ kN/m} \end{aligned}$$

Design loads:

$$\begin{aligned} F_{Z,1,d} &= 1,4 \cdot F_{Z,1} = 1,33 \text{ kN} \\ F_{X,1,d} &= 1,4 \cdot F_{X,1} = 0,14 \text{ kN} \\ M_{Y,1,d} &= 2,065 \cdot F_{X,1,d} = 0,14 \text{ kNcm} \\ F_{Z,2,d} &= 1,4 \cdot F_{Z,2} = 2,66 \text{ kN} \\ F_{X,2,d} &= 1,4 \cdot F_{X,2} = 0,28 \text{ kN} \\ M_{Y,2,d} &= 2,065 \cdot F_{X,2,d} = 0,58 \text{ kNcm} \\ q_{z,d} &= 1,4 \cdot q_z = 1,54 \text{ kN/m} \end{aligned}$$

Calculation model 1 for design of:

HZM 41/41 or HM 41/41 profile:

shear forces at infinite distance to bolt 2 from both sides

$$\begin{aligned} V_{Z,Ed}^L &\leq V_{Z,Rd} \\ V_{Z,Ed}^R &\leq V_{Z,Rd} \end{aligned}$$





bending moment above bolt 2, considering shear force on both sides

$$\begin{aligned} M_{Y,Ed} &\leq M_{Y,Rd} \text{ (with } V_{Z,Ed}^L \text{) p if required} \\ M_{Y,Ed} &\leq M_{Y,Rd} \text{ (with } V_{Z,Ed}^R \text{) p if required} \end{aligned}$$

normal force on both sides of bolt 2

$$\begin{aligned} N_{Ed}^L &\leq N_{Rd} \text{ (p if required)} \\ N_{Ed}^R &\leq N_{Rd} \text{ (p if required)} \end{aligned}$$

Calculation model 1

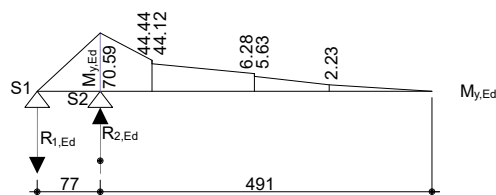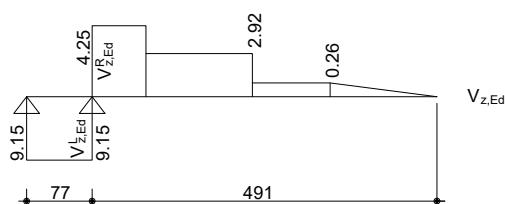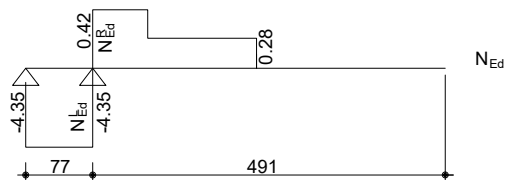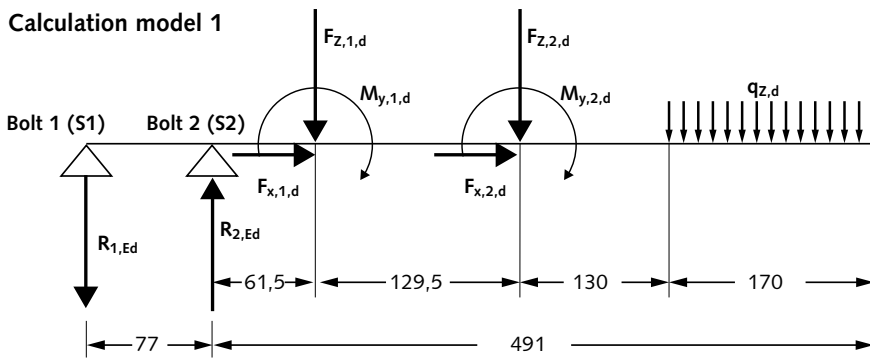


HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

System 41 – Medium Duty – Adjustable Cantilever


NEW!

KON 41/V Calculation Example

HZM or HM 41/41												
Section properties	f_Y [N/mm ²]	τ [N/mm ²]	A [cm ²]	Z _c [cm]	I _y [cm ⁴]	I _z [cm ⁴]	Z _p [cm]	W _{pl} [cm ³]	N [kN]	V _z [kN]	M _y [kNcm]	Deformation
	235.00	135.68	2.688	1.725	7.130	6.887	0.969	3.946	63.16	11.98	69.67	elastic
									63.16	17.08	92.73	plastic
f_Y: material yield strength τ: material shear strength A: section area Z_c: ordinate of elastic centroid I_y, I_z: bending moment of inertia Z_p: ordinate of plastic centroid W_{pl}: plastic moment resistance el: elastic section forces N_{el}; V_{y,el} ; M_{y,el} pl: plastic section forces N_{pl}; V_{y,pl} ; M_{y,pl}												

HALFEN provides technical support for planning and calculating of all assembly products. Please refer to your local sales company. Contact information can be found at the end of this catalogue or at www.halfen.com


Calculation model 2

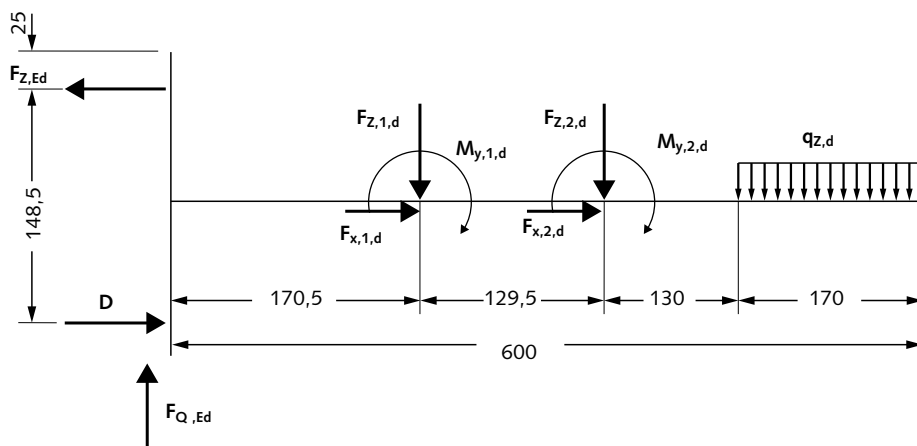

Calculation model 2 for calculation of connector forces:

$$F_{Z,Ed} \leq F_{Z,Rd}$$

$$F_{Q,Ed} \leq F_{Q,Rd}$$

Connector forces				
	Allowable forces		Design forces	
	Allowable R ₂ [kN]	Allowable F _Z [kN]	R _{2,d} [kN]	F _{Z,d} [kN]
	12.0	10.7	16.8	15.0

The values are adopted from the tables "maximum forces" and "connector reaction forces" normalization according f_y .

HVT Connector:

According to the first design criteria the following conditions must be verified:

$$R_{2,Ed} \leq R_{2,d} \text{ (for design loads)}$$

$$R_{2,Ed} \leq R_{2,allow.} \text{ (for allowable loads)}$$

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

HALFEN System 41 – Medium Duty – Adjustable Cantilever

KON 41/V Calculation Example

Example:

From calculation model 2 the connector force $F_{Z,Ed}$ can be calculated

Connector force

$$\sum M^+ = q_{z,d} \cdot 0.17 \cdot 51.5 + F_{z,2,d} \cdot 30 + M_{y,2,d} + F_{z,1,d} \cdot 17.05 + M_{y,1,d}$$

$$F_{Z,Ed} = \frac{1}{14.85} \cdot \sum M^+ - F_{x,1,d} - F_{x,2,d}$$

$$F_{Z,Ed} = 7.45 \text{ kN}$$

Design values for KON 41/V-FV

see table „Section properties“

$$M_{y,Rd} = \frac{M_{y,pl}}{\gamma_m} = \frac{92.73}{1.1} = 84.30 \text{ kN}$$

$$V_{z,Rd} = \frac{V_{z,pl}}{\gamma_m} = \frac{17.08}{1.1} = 15.52 \text{ kN}$$

$$N_{Rd} = \frac{N_{pl}}{\gamma_m} = \frac{63.16}{1.1} = 57.42 \text{ kN}$$

$$R_{2,d} = 16.8 \text{ kN}$$

$$F_{z,d} = 15.0 \text{ kN}$$

Proof of cantilever profile HZM 41/41 left from support S2

$$\frac{V_{z,Ed}^L}{V_{z,Rd}} = \frac{9.15}{15.52} = 0.59 \text{ kN} < 1.0 \quad \checkmark$$

$$V_{z,Ed}^L > 0.5 \cdot V_{z,Rd} \Rightarrow \rho = \left(2 \cdot \frac{V_{z,Ed}^L}{V_{z,Rd}} - 1 \right)^2 = 0.0321 \quad \checkmark$$

$$\frac{M_{y,Ed}}{(1-\rho) \cdot M_{y,Rd}} = \frac{70.59}{(1-0.0321) \cdot 84.3} = 0.865 \text{ kN} < 1.0 \quad \checkmark$$

$$\frac{N_{Ed}^L}{(1-\rho) \cdot N_{Rd}} = \frac{4.35}{(1-0.0321) \cdot 57.42} = 0.078 \text{ kN} < 1.0 \quad \checkmark$$

$$\frac{M_{y,Ed}}{(1-\rho) \cdot M_{y,Rd}} + \frac{N_{Ed}^L}{(1-\rho) \cdot N_{Rd}} = 0.943 \text{ kN} < 1.0 \quad \checkmark$$

Proof of cantilever profile HZM 41/41 right from support S2

$$\frac{V_{z,Ed}^R}{V_{z,Rd}} = \frac{4.25}{15.52} = 0.27 \text{ kN} < 1.0 \quad \checkmark$$

$$V_{z,Ed}^R < 0.5 \cdot V_{z,Rd} \Rightarrow \rho = 0$$

$$\frac{M_{y,Ed}}{M_{y,Rd}} = \frac{70.59}{84.3} = 0.837 \text{ kN} < 1.0 \quad \checkmark$$

$$\frac{N_{Ed}^R}{N_{Rd}} = \frac{0.42}{57.42} = 0.007 \text{ kN} < 1.0 \quad \checkmark$$

$$\frac{M_{y,Ed}}{(1-\rho) \cdot M_{y,Rd}} + \frac{N_{Ed}^R}{(1-\rho) \cdot N_{Rd}} = 0.844 \text{ kN} < 1.0 \quad \checkmark$$

All design criteria are fulfilled by the cantilever profile HZM 41/41

Proof of the HVT 41/V-VK-FV connector

see table „Connector forces“

$$\frac{R_{2,Ed}}{R_{2,d}} = \frac{13.4}{16.8} = 0.79 \text{ kN} < 1.0 \quad \checkmark$$

$$\frac{F_{x,Ed}}{F_{x,d}} = \frac{7.45}{15.0} = 0.50 \text{ kN} < 1.0 \quad \checkmark$$

All design criteria are fulfilled by the connector

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

HALFEN System 36 – Light Duty



System 36

System 36 is suitable for **light loads** in interior spaces.



The use of optimized support constructions provides an economic and flexible design.



HM and HL 36/36
cold-rolled

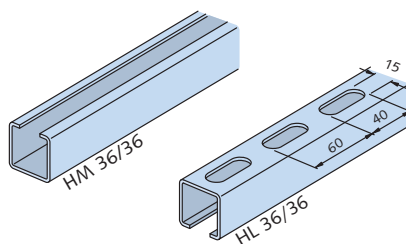

HM 38/17
cold-rolled




HM 36/36, HL 36/36, HM 38/17		
Material	Order no.	Length [mm]
HM 36/36 0280.		6000
WB	070-00001	
FV	070-00002	
A4	070-00003	
HL 36/36 0281.		
WB	050-00001	
FV	050-00002	
A4	050-00003	6070
HM 38/17 0280.		
WB	020-00001	
FV	020-00002	
A2	020-00003	
A4	020-00004	

Channel data, measurements, load bearing capacities, etc. can be found in the Technical Product Information **MT-FBC-E "HALFEN Flexible bolt connections"** (see page 43).

Accessories


PA - 18H Channel cover

HPE 36/36 Channel end cap




see page 39

SIC 38/17 Locking plate



see page 36

SDM 36/6 Vibration absorber



see page 38



HALFEN Bolt HS 38/17
Locking plate **GWP 38/17**

Bolt data, measurements, load bearing capacities, etc. can be found in the Technical Product Information **"HALFEN Flexible bolt connections"** (see page 44).

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

HALFEN System 36 – Light Duty


Application examples



Connection fittings HVT 36

Standard dimensions [mm]:

Unless otherwise stated, all **HVT 36** connectors are made with the following typical dimensions:




Recommended HALFEN Bolts:


HS 38/17 M10 x 30 FV 4.6 or A4-70

HS 38/17 M12 x 30 FV 4.6 or A4-70


and washers.




HVT 36-1




HVT 36-2




HVT 36-3



HVT 36-4




HVT 36-5




HVT 36-6

Connection elements – System 36


Article name	Order no.	
	FV = hot-dip galvanized GV = electro-plated	A4 = stainless steel
	0312.020-	0312.020
HVT 36 - 1 - GV	00001	-
HVT 36 - 2 - GV	00002	00010
HVT 36 - 3 - GV	00003	-
HVT 36 - 4 - GV	00004	-
HVT 36 - 5 - GV	00005	-
HVT 36 - 6 - GV	00006	-
HVT 36 - 7 - FV	00007	00011
HVT 36 - 8 - GV	00008	-
HVT 36 - 9 - FV	00009	-



HVT 36-7



HVT 36-8



HVT 36-9 ①

Note: Each drawing shows only one of many possible applications.

① The connector is fixed to channels with T-head bolts type HS 28/15 - M10 x 25 and washers M10 DIN EN ISO 7093-1/ DIN 9021.



HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

HALFEN System 28 – Light Duty

System 28

Similar to System 36, System 28 is also suitable for **light loads** in interior environments.


HM and HL 28/28 cold-rolled

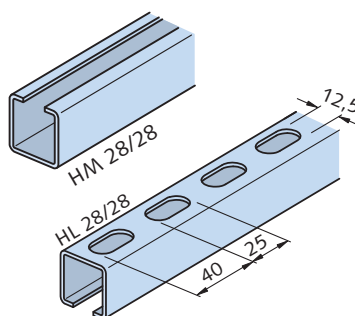

HM 28/28 and HL 28/28		
Material	Order no.	Length [mm]
HM 28/28 0280.		6000
WB	050-00001	
SV	050-00003	
FV	050-00002	
A4	050-00004	
HL 28/28 0281.		
WB	060-00001	
SV	060-00003	
FV	060-00002	
A4	060-00004	


Accessories

HPE 28/28 Channel end cap



see page 39

SDM 28/6 Vibration absorber



see page 38

Channel data, measurements, load bearing capacities, etc. can be found in the Technical Product Information "HALFEN Flexible bolt connections" (see page 47).

HALFEN Bolt HS 28/15 Locking plate GWP 28/15


Bolt data, measurements, load bearing capacities, etc. can be found in the Technical Product Information "HALFEN Flexible bolt connections" (see page 58).

Connection fittings HVT 28


Standard dimensions [mm]:

Unless otherwise stated, all **HVT 28** connectors are made with the following typical dimensions:


Recommended
HALFEN Bolts:
HS 28/15 - M8 × 20
and washers.




Fitting system HVT 28	
FV = hot-dip galvanized GV = zinc plated	Order no. 0312.010-
HVT 28 - 1 - GV	00001
HVT 28 - 2 - GV	00002
HVT 28 - 3 - GV	00003
HVT 28 - 4 - GV	00004
HVT 28 - 5 - GV	00005
HVT 28 - 6 - GV	00006
HVT 28 - 7 - FV	00007
HVT 28 - 8 - GV	00008
HVT 28 - 9 - FV	00009




HVT 28-1




HVT 28-2




HVT 28-3




HVT 28-4




HVT 28-5




HVT 28-6



HVT 28-7



HVT 28-8



HVT 28-9

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

HALFEN System 36 and System 28 – Light Duty – Construction Example

Framework constructions



Pre-assembled Components; System 36 and System 28

HALFEN System 36 and System 28 are used in support structures for pipes with small nominal diameter and cable-trays, i.e. supply modules in apparatus engineering.


Example: Ground supports connected to plant components

Delivery time on request.

Construction example System 36:

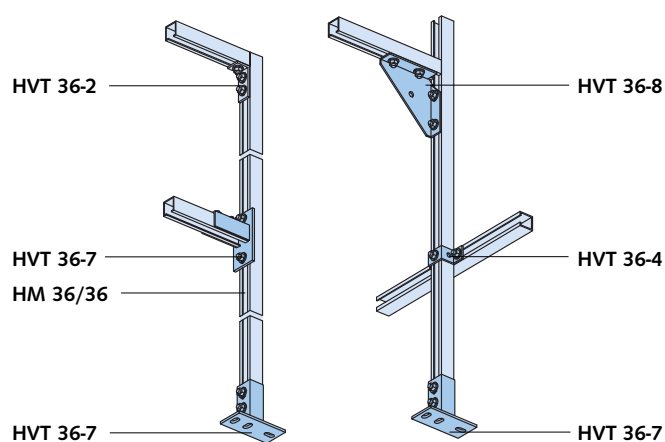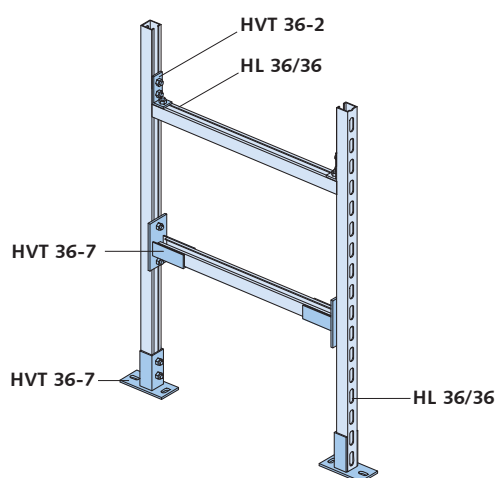

Construction example System 28:

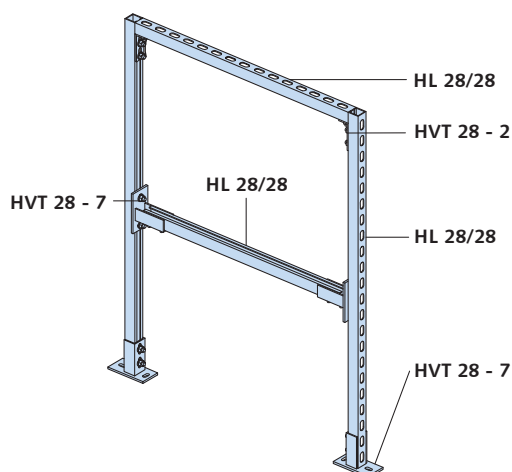

Frame constructions are made to customer specifications, supported by our engineering team and made, including assembly material, by our production team.

If you have any further questions:

Our technical department and our field support technicians will gladly advise and support you with solutions when using HALFEN Framing systems.

For more information contact HALFEN

Please see the back page of this catalogue for regional contact addresses.
www.halfen.com

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS


Cantilever Brackets

HALFEN Cantilever brackets




Cantilevers constructed in standard HALFEN Channel profiles can be combined with HALFEN T-head bolts, HALFEN Fittings and numerous system accessories as required.

Note: Depending on the number of items ordered, cantilever brackets can also be made to customer specifications.





Bracket 52:



Bracket 41:

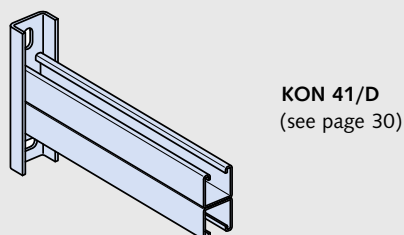


Bracket 36/28:

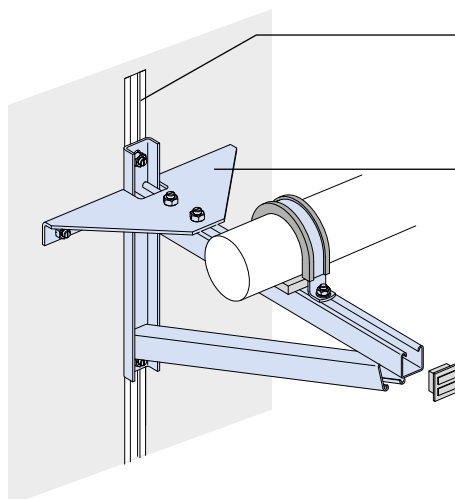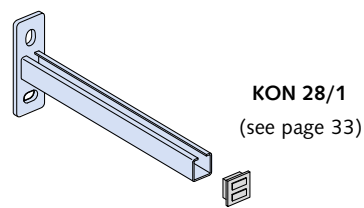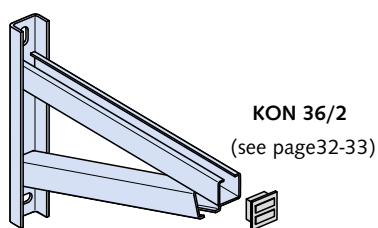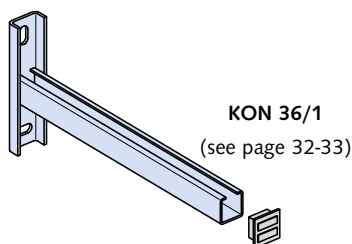

Fixing with dowel to wall or with T-head bolts to HALFEN Cast-in channel.

For loads in longitudinal pipe direction combinations of HALFEN Cantilevers with support brace type KON - Z1 are possible.

All HALFEN Cantilever brackets are delivered with channel end cap (except KON 41/D).

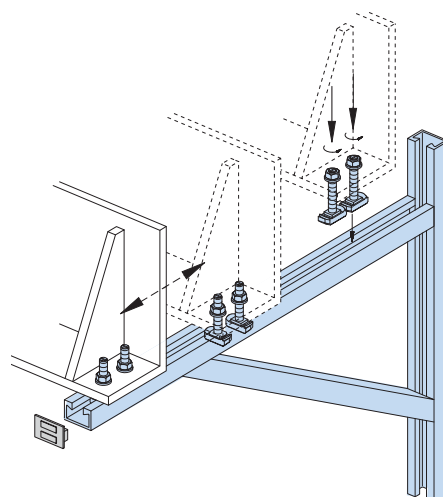


HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

Cantilever Brackets

Cantilever brackets - Type 52

KON 52/2


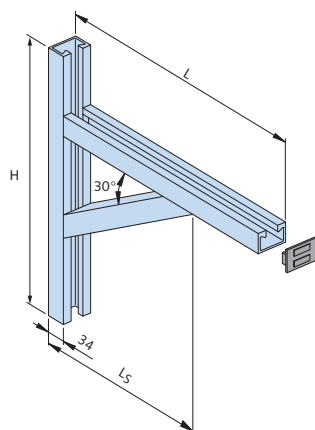


Dimensions and load bearing capacities KON 52/2								
Length L [mm]	Height H [mm]	Length L _s [mm]	hot-dip galvanized FV Order no. 0310.080-	stainless steel A4 ① Order no. 0310.080-	F [kN] ②			
						F ₁	F ₁	F ₂
500	450	330	00001	00008	allow. load	9.0	15.0	7.5
					F _{Rd}	12.6	21.0	10.5
600	475	380	00002	00009	allow. load	8.0	15.0	7.5
					F _{Rd}	11.2	21.0	10.5
700	500	430	00003	00010	allow. load	7.0	15.0	6.5
					F _{Rd}	9.8	21.0	9.1
800	550	480	00004	00011	allow. load	6.0	15.0	6.0
					F _{Rd}	8.4	21.0	8.4
900	600	530	00005	00012	allow. load	5.5	15.0	5.5
					F _{Rd}	7.7	21.0	7.7
1000	650	630	00006	00013	allow. load	5.0	15.0	5.0
					F _{Rd}	7.0	21.0	7.0
1100	700	730	00007	00014	allow. load	4.5	14.0	4.5
					F _{Rd}	6.3	19.6	6.3

① on request ② Explanatory notes for verification, see page 5

KON 52/2 Assembly

For lateral bracing
please use
KON 52/3
and KON 52/4

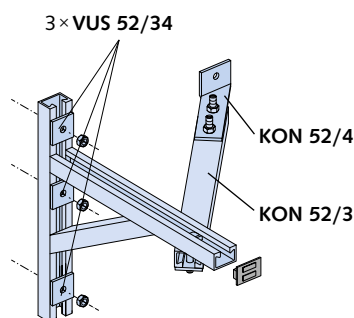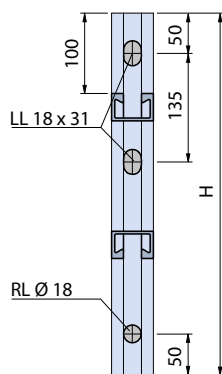

Connection forces KON 52/2							
Length L	① F [kN]						
[mm]		Force direction	Z	Q	Z	Q	Z
500	allow. load	6.3	9.1	14.4	15.1	10.7	15.1
	$F_{Rd,...}$	8.8	12.7	20.0	21.1	14.8	21.1
600	allow. load	6.0	8.1	14.1	15.1	11.4	15.1
	$F_{Rd,...}$	8.3	11.3	19.5	21.1	15.8	21.1
700	allow. load	5.5	7.1	14.0	15.1	10.3	13.1
	$F_{Rd,...}$	7.5	10.0	19.3	21.2	14.3	18.4
800	allow. load	4.8	6.1	13.9	15.1	9.8	12.1
	$F_{Rd,...}$	6.7	8.6	19.2	21.2	13.6	17.0
900	allow. load	4.5	5.6	13.8	15.1	9.3	11.1
	$F_{Rd,...}$	6.3	7.9	19.1	21.2	12.9	15.6
1000	allow. load	4.4	5.2	13.7	15.2	8.9	10.2
	$F_{Rd,...}$	6.1	7.2	18.9	21.2	12.3	14.2
1100	allow. load	4.3	4.7	12.7	14.2	8.5	9.2
	$F_{Rd,...}$	5.9	6.5	17.5	19.8	11.8	12.8

① Explanatory notes for verification. see page 5

① Explanatory notes for verification, see page 5


HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

Cantilever Brackets


Cantilever bracket – 52; continued

Fittings for bracket 52/2

Bracing KON 52/3



Fixing bracket KON 52/4





Dimensions KON 52/3 and KON 52/4 ②

	Length	hot-dip galvanized FV	stainless steel A4 ①	suitable for bracket 52/2		
	L _{st} [mm]	Order no. 0310.	Order no. 0310.	Length L [mm]	r [mm]	A [mm]
KON 52/3	532	090-00001	090-00012	500	100	400
	602	090-00002	090-00013	600	150	450
	673	090-00003	090-00014	700	200	500
	744	090-00004	090-00015	800	250	550
	815	090-00005	090-00016	900	300	600
	961	090-00006	090-00017	1000	300	700
	1102	090-00007	090-00018	1100	300	800
KON 52/4		100-00002	100-00001	-	-	-

① on request

Assembly diagram for lateral bracing

HS 50/30 - M12 × 60
incl. nut ②

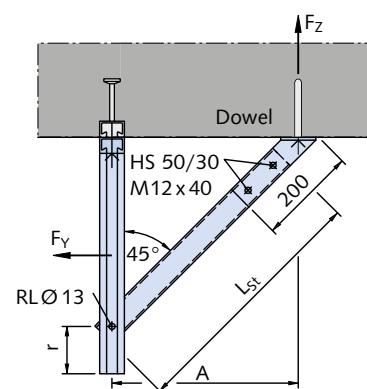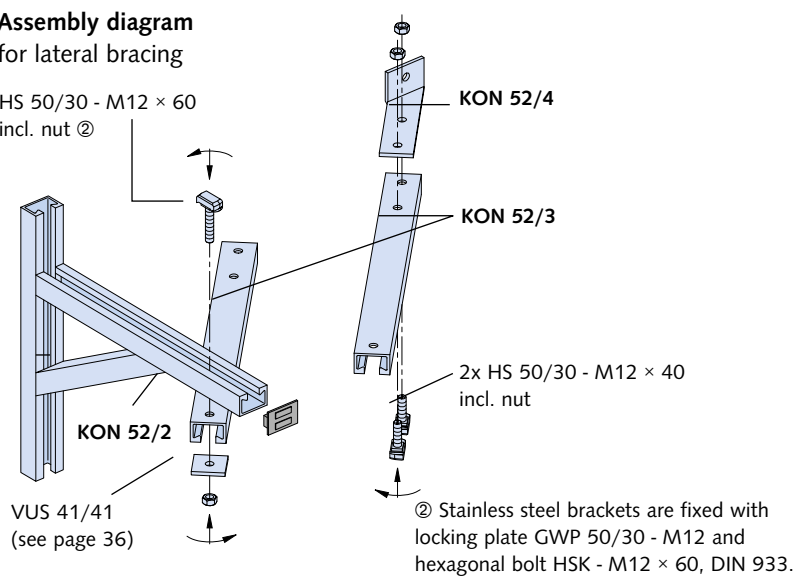



Note: The max. possible load of lateral braces depends on the allowable load (F_z) of the dowels.

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

Cantilever Brackets

Cantilever bracket - Type 41

KON 41/1 CE

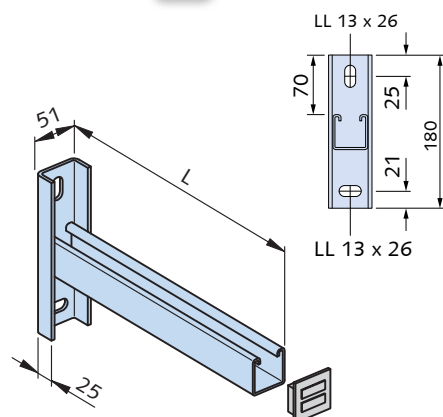



Assembly example with bracing KON Z1
(see page 31)

Dimensions and load bearing capacities KON 41/1

Length L [mm]	hot-dip galvanized FV Order no. 0310.010-	stainless steel A4 Order no. 0310.010-	F [kN] ①				
				F₁	F₁	F₂	F₃
175	00001	00004	allow. load	5.35	2.65	2.65	1.75
			<i>F_{Rd}</i>	7.49	3.71	3.71	2.45
325	00002	00005	allow. load	2.65	1.30	1.30	0.85
			<i>F_{Rd}</i>	3.71	1.82	1.82	1.19
475	00003	00006	allow. load	1.75	0.85	0.85	0.55
			<i>F_{Rd}</i>	2.45	1.19	1.19	0.77



① Explanatory notes for verification, see page 5

Connection force KON 41/1

Length L									
[mm]	① F [kN]								
Force direction		Z	Q	Z	Q	Z	Q	Z	Q
175	allow. load	3.5	5.4	3.5	2.7	3.5	5.4	3.5	5.3
	$F_{Rd,...}$	4.9	7.5	4.9	3.8	4.9	7.5	4.8	7.4
325	allow. load	3.3	2.7	3.2	1.4	3.2	2.7	3.1	2.6
	$F_{Rd,...}$	4.6	3.8	4.5	1.9	4.5	3.7	4.4	3.6
475	allow. load	3.2	1.8	3.1	0.9	3.1	1.8	3.0	1.7
	$F_{Rd,...}$	4.4	2.5	4.3	1.3	4.3	2.4	4.2	2.4

① Explanatory notes for verification, see page 5

KON 41/D CE

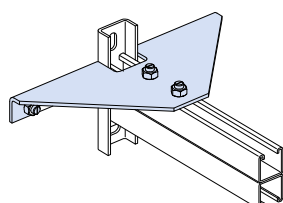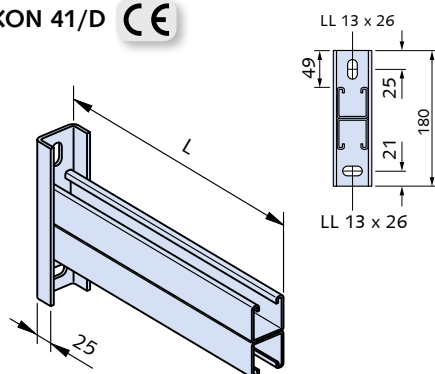

Assembly example with bracing KON Z1
(see page 31)

Dimensions and load bearing capacities KON 41/D

Length L [mm]	hot-dip galvanized FV Order no. 0310.030-	stainless steel A4 Order no. 0310.030-	F [kN] ①				
				F₁	F₁	F₂	F₃
325	00001	00004	allow. load	5.60	2.80	2.80	1.85
			<i>F_{Rd}</i>	7.84	3.92	3.92	2.59
475	00002	00005	allow. load	3.70	1.85	1.85	1.20
			<i>F_{Rd}</i>	5.18	2.59	2.59	1.68
625	00003	00006	allow. load	2.80	1.40	1.40	0.90
			<i>F_{Rd}</i>	3.92	1.96	1.96	1.26

① Explanatory notes for verification, see page 5




HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

Cantilever Brackets

Cantilever bracket- Type 41


Connection forces KON 41/D

Connection force KON 41/D

Length L									
[mm]	① F [kN]								
Force direction		Z	Q	Z	Q	Z	Q	Z	Q
325	allow. load	6.9	5.7	6.9	2.9	6.9	5.7	6.8	5.6
	$F_{Rd,(...)}$	9.6	7.9	9.6	4.0	9.6	7.9	9.5	7.8
475	allow. load	6.6	9.3	6.6	1.9	6.6	3.8	6.5	3.7
	$F_{Rd,(...)}$	3.8	5.3	9.3	2.7	9.3	5.3	9.0	5.1
625	allow. load	6.7	2.9	6.7	1.5	6.7	2.9	6.4	2.8
	$F_{Rd,(...)}$	9.3	4.0	9.3	2.1	9.3	4.0	9.0	3.9

① Explanatory notes for verification, see page 5

KON 41/2

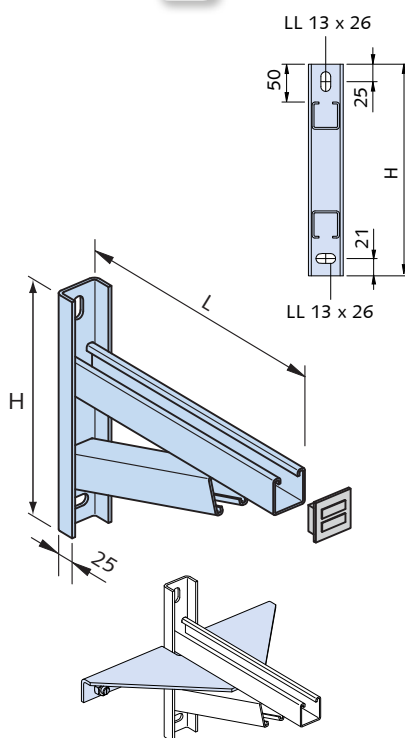

Assembly example with bracing KON Z1
(see below)

Dimensions and load bearing capacities KON 41/2

Size [mm]		hot-dip galvanized FV	stainless steel A4					
Length	Height	Order no.	Order no.	F [kN] ①				
L	H	0310.020-	0310.020-		F ₁	F ₁	F ₂	F ₃
325	270	00001	00005	allow. load	7.50	4.90	4.80	3.40
				F _{Rd}	10.50	6.86	6.72	4.76
475	330	00002	00006	allow. load	5.00	4.75	3.70	2.45
				F _{Rd}	7.00	6.65	5.18	3.43
625	380	00003	00007	allow. load	3.50	3.50	2.75	1.85
				F _{Rd}	4.90	4.90	3.85	2.59
775	430	00004	00008	allow. load	2.65	2.65	2.05	1.40
				F _{Rd}	3.71	3.71	2.87	1.96

① Explanatory notes for verification, see page 5



Connection force KON 41/2

Length L									
[mm]	^① F [kN]								
Force direction		Z	Q	Z	Q	Z	Q	Z	Q
325	allow. load	5.5	7.6	6.8	4.9	7.0	9.7	7.5	10.3
	$F_{Rd,(...)}$	7.7	10.6	9.6	6.9	9.9	13.5	10.5	14.4
475	allow. load	4.2	5.1	7.6	4.8	6.3	7.5	6.2	7.4
	$F_{Rd,(...)}$	6.0	7.1	10.8	6.7	8.8	10.5	8.8	10.4
625	allow. load	3.4	3.6	6.3	3.6	5.2	5.6	5.3	5.6
	$F_{Rd,(...)}$	4.7	5.0	9.0	5.0	7.4	7.8	7.4	7.9
775	allow. load	2.8	2.7	5.2	2.7	4.2	4.2	4.3	4.3
	$F_{Rd,(...)}$	3.9	3.8	7.3	3.8	6.0	5.9	6.1	6.0

① Explanatory notes for verification, see page 5

Accessory: Bracket KON Z1 for the cantilevers KON 41, KON 36, and KON 28

hot-dip galvanized FV	stainless steel A4
Order no.	Order no.
0310.110-00002	0310.110-00001
Bolts for KON Z1	
KON 28	HS 28/15 M10 x 30 fv
KON 36	HS 38/17 M12 x 30 fv
KON 41	HS 41/41 M12 x 35 fv

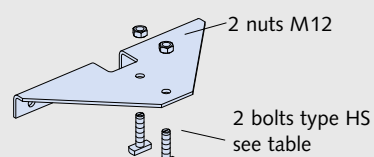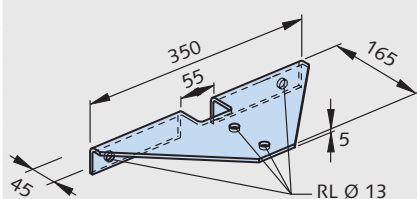



(bolts, nuts and brackets are ordered separately)

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS





Cantilever Brackets

Cantilever bracket – Type 36





KON 36/1

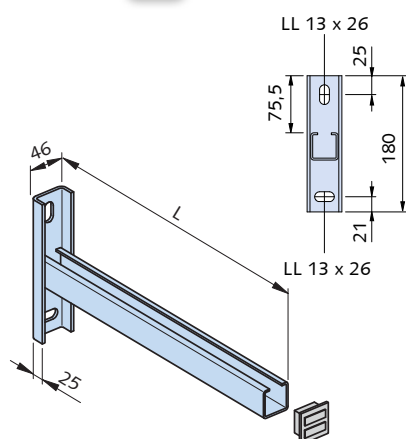

Assembly example with bracing KON Z1 (see page 31)


Dimensions and load bearing capacities KON 36/1									
Length L [mm]	hot-dip galvanized FV Order no. 0310.060-	stainless steel A4 Order no. 0310.060-	F [kN] ①						
300	00001	00005	allow. load	2.00	1.00	1.00	0.67		
			F_{Rd}	2.80	1.40	1.40	0.98		
400	00002	00006	allow. load	1.50	0.75	0.75	0.50		
			F_{Rd}	2.10	1.05	1.05	0.70		
500	00003	00007	allow. load	1.20	0.60	0.60	0.40		
			F_{Rd}	1.68	0.84	0.84	0.56		
600	00004	00008	allow. load	1.00	0.50	0.50	0.33		
			F_{Rd}	1.40	0.70	0.70	0.46		





① Explanatory notes for verification, see page 5

Connection force KON 36/1									
Length L [mm]	F [kN] ①								
Force direction		Z	Q	Z	Q	Z	Q	Z	Q
300	allow. load	3.4	2.0	3.5	1.0	3.3	2.0	3.5	2.2
	$F_{Rd, (...)}$	4.7	2.8	4.9	1.4	4.6	2.8	4.9	3.0
400	allow. load	3.4	1.6	3.6	0.8	3.4	1.6	3.4	1.6
	$F_{Rd, (...)}$	4.8	2.2	5.0	1.1	4.8	1.6	4.8	2.2
500	allow. load	3.5	1.3	3.6	0.7	3.5	1.3	3.5	1.3
	$F_{Rd, (...)}$	4.9	1.7	5.0	0.9	4.9	1.7	4.9	1.7
600	allow. load	3.6	1.0	3.6	0.5	3.6	1.0	3.6	1.0
	$F_{Rd, (...)}$	5.0	1.4	5.1	0.7	5.0	1.4	4.9	1.4

① Explanatory notes for verification, see page 5

KON 36/2

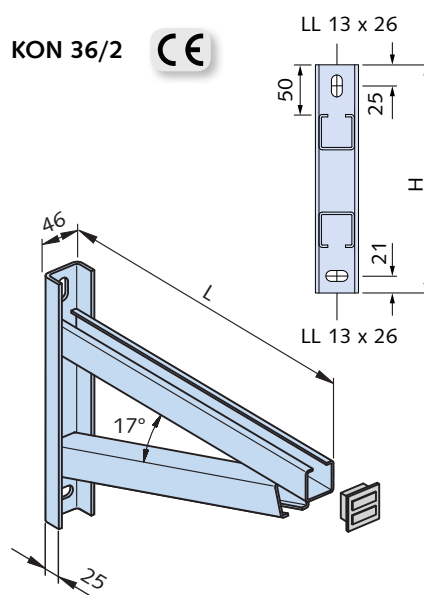


Dimensions and load bearing capacities KON 36/2									
Length L [mm]	hot-dip galvanized FV Order no. 0310.070-	stainless steel A4 Order no. 0310.070-	F [kN] ①						
300	00001	00006	allow. load	5.00	3.20	3.60	2.35		
			F_{Rd}	7.00	4.40	5.00	3.30		
400	00002	00010	allow. load	4.15	2.75	3.15	2.10		
			F_{Rd}	5.80	3.85	4.40	2.95		
500	00003	00007	allow. load	3.15	2.70	2.50	1.65		
			F_{Rd}	4.40	3.80	3.50	2.30		
600	00004	00009	allow. load	2.55	2.50	2.00	1.30		
			F_{Rd}	3.60	3.50	2.80	1.80		
700	00005	00011	allow. load	2.10	2.50	1.65	1.10		
			F_{Rd}	2.95	3.50	2.30	1.55		

① Explanatory notes for verification, see page 5

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

Cantilever Brackets

Cantilever bracket – Type 36





Assembly example with bracing KON Z1
(see page 31)

Connection force KON 36/2									
Length L [mm]	F [kN] ①								
Force direction		Z	Q	Z	Q	Z	Q	Z	Q
300	allow. load	4.9	5.0	5.6	3.1	6.7	7.2	6.4	7.1
	$F_{Rd,(\dots)}$	6.9	7.0	7.9	4.4	9.4	10.1	8.9	9.9
400	allow. load	5.2	4.2	6.2	2.8	7.3	6.3	7.1	6.3
	$F_{Rd,(\dots)}$	7.3	5.8	8.7	3.9	10.2	8.9	9.9	8.9
500	allow. load	4.9	3.2	7.1	2.7	7.1	5.0	6.7	5.0
	$F_{Rd,(\dots)}$	6.8	4.5	9.9	3.8	9.9	7.0	9.4	7.0
600	allow. load	4.6	2.6	7.3	2.5	6.6	4.0	6.1	3.9
	$F_{Rd,(\dots)}$	6.4	3.6	10.2	3.5	9.3	5.7	8.6	5.5
700	allow. load	4.4	2.1	8.2	2.6	6.3	3.3	5.9	3.3
	$F_{Rd,(\dots)}$	6.1	3.0	11.5	3.6	8.8	4.7	8.3	4.7

① Explanatory notes for verification, see page 5

Cantilever bracket – Type 28

KON 28/1

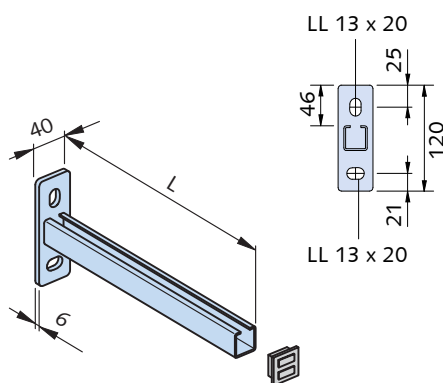

Assembly example with bracing KON Z1
(see page 31)

Dimensions and load bearing capacities KON 28/1									
Length L [mm]	hot-dip galvanized FV	stainless steel A4	F [kN] ①						
	Order no. 0310.050-	Order no. 0310.050-		F_1	F_1	F_2	F_3		
100	00001	00005	allow. load	2.70	1.35	1.35	0.90		
			F_{Rd}	3.78	1.89	1.89	1.26		
200	00002	00006	allow. load	1.35	0.68	0.68	0.45		
			F_{Rd}	1.89	0.95	0.95	0.63		
300	00003	00007	allow. load	0.90	0.45	0.45	0.30		
			F_{Rd}	1.26	0.63	0.63	0.42		
400	00004	00008	allow. load	0.70	0.35	0.35	0.20		
			F_{Rd}	0.98	0.49	0.49	0.28		

① Explanatory notes for verification, see page 5

Connection force KON 28/1									
Length L [mm]	F [kN] ①								
Force direction		Z	Q	Z	Q	Z	Q	Z	Q
100	allow. load	1.9	2.7	1.9	1.4	1.9	2.7	1.9	2.7
	$F_{Rd,(\dots)}$	2.6	3.8	2.6	1.9	2.6	3.8	2.6	3.8
200	allow. load	1.9	1.4	1.9	0.7	1.9	1.4	1.9	1.4
	$F_{Rd,(\dots)}$	2.6	1.9	2.6	1.0	2.6	2.0	2.6	1.9
300	allow. load	1.9	1.0	1.9	0.5	1.9	1.0	1.9	1.0
	$F_{Rd,(\dots)}$	2.6	1.3	2.6	0.7	2.6	1.3	2.6	1.3
400	allow. load	1.9	0.8	1.9	0.4	1.9	0.8	1.7	0.7
	$F_{Rd,(\dots)}$	2.7	1.0	2.7	0.5	2.7	1.0	2.3	0.9

① Explanatory notes for verification, see page 5

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS


Adjustable Framework Construction – Accessories

Beam clamp – HCS TK


HCS TK

Beam clamp

Beam clamp with "Grip".
form-fit load transmission with 4 nibs,
used in pairs.
Adjustable flange height 5–40 mm.



Assembly diagram

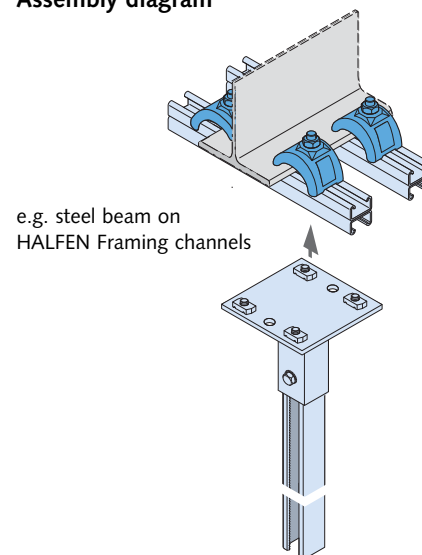


Beam clamps – HCS TK	
Type hot-dip galvanized	Order no.
HCS TK - FV	0308.030-00001

Please order HALFEN Bolts and nuts
separately. The torque value depends
on the bolts used.


Beam clamp – KLP-S

KLP - S


Beam clamps, S235 forged steel



Load diagram: KLP-S



Assembly diagram KLP - S

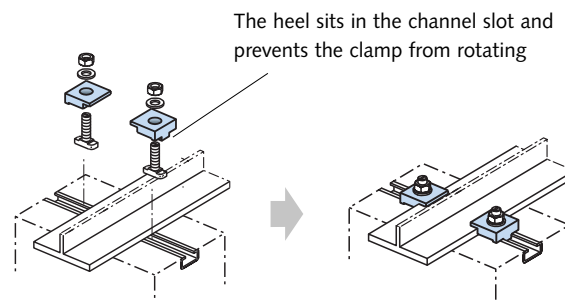

Dimensions and load bearing capacities – KLP-S

Type no.	FV hot-dip galvanized Order no.	heel width n [mm]	for HALFEN- Bolts Ø x l [mm]	Dimensions [mm]							allow. load at σ allow. = 125 N/mm ² F [kN]	used mainly with		
				a	b	c	Ø d □	h	k	m		europaean standard beams I	other beam, flange thickness t [mm]	Railtracks- ^③ crane-rails etc. nominal size (acc. DIN 536)
10	00001	16	M 16 x 60	44	45	12	Ø 18	5	12	22	3.5	80 - 140	4 - 6	S 24
26	00002	no heel	M 16 x 60	62.5	64	21	Ø 18	9	16.5	34.5	3.5	160 - 240	7 - 9	S 24 A 45, A 55
20	00003	20	M 20 x 65	52	55	19	□ 21	8	15.0	24	10.0	160 - 240	7 - 9	S 24 - S 49

③ Check flange thickness of the rail.


HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

Adjustable Framework Construction – Accessories

Beam clamps – KLP 60

KLP - 60

Beam clamps

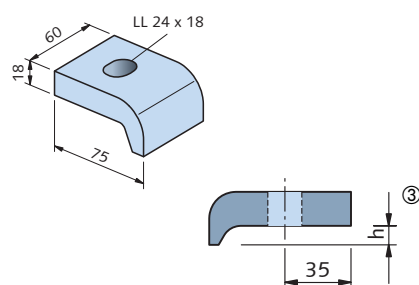

Dimensions and load bearing capacities – KLP - 60


Type	Order no.	Clamping height h [mm]	allowable load ②		used mainly with		
			HALFEN HS Bolts to suit selected channel M 16 × 60		Standard profiles	Standard profiles	Railtracks- ③ crane-rails etc. nominal size (acc. to DIN 536)
	0325.020-		bolt, grade 4.6	bolt, grade 8.8	I	HEB (IPB)	
60/10	00001	10	$F_1 = 7,0$	$F_2 = 11,25$	120 - 160	100	A65, S 33, S 41
60/12	00002	12			220 - 240	140	A100, S 49, A75
60/14	00003	14			240 - 280	160 - 180	A120, S 54
60/16	00004	16			300 - 340	200 - 220	S 64
60/18	00005	18 ①			360 - 380	240 - 260	–
60/20	00006	20 ①			400 - 450	280 - 300	–

① T-head bolt M16 × 80 is required (bolt length depends on clamping height and channel type).


② Do not exceed HALFEN Framing channel bearing capacity! (The effect of the cantilever must be considered when selecting HALFEN Channels and bolts).

③ Check flange thickness of the rail.


Load diagram KLP - 60

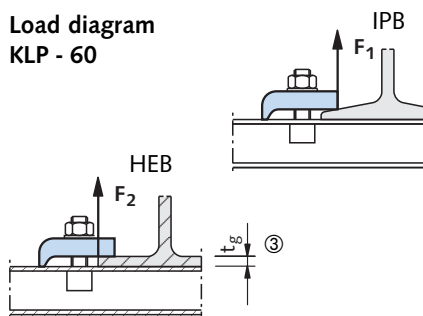


Assembly diagram KLP - 60

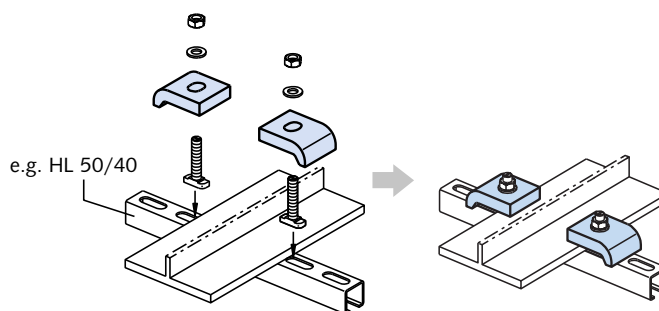

Assembly example:

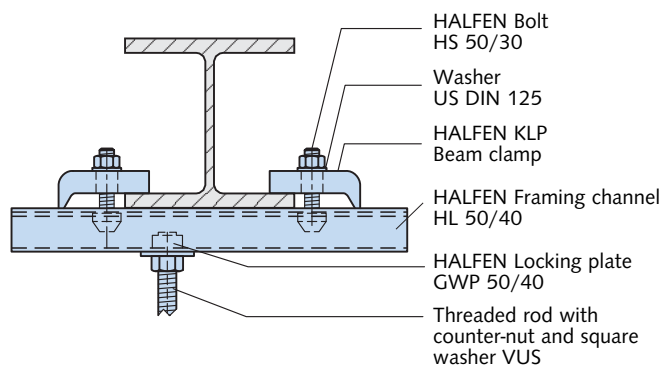

Order example:




HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

Nuts, Washers

MU


Hexagonal nuts
DIN EN ISO 4032/
DIN 934



GV galvanized grade 8 thread	A4 stainless steel thread	S/m DIN [mm]	S/m ISO [mm]	e [mm]
M6	M6	10/5	10/6	11.5
M8	M8	13/6.5	13/7.5	15.0
M10	M10	17/8	16/ 9.5	19.6
M12	M12	19/10	18/12	21.9
M16	M16	24/13	24/15.5	27.7
M20	M20	30/16	30/19	34.6
M24	M24	36/19	36/22	41.5
FV hot-dip galvanized thread	A2 stainless steel thread	S/m DIN [mm]	S/m EN [mm]	e [mm]
M6, M8	M8	13/6.5	13/7.5	15.0
M10	M10	17/08	16/ 9.5	19.6
M12	M12	19/10	18/12	21.9
M16	M16	24/13	24/15.5	27.7

US

Washers
DIN EN
ISO 7093-1/
ISO 7094,
DIN 9021/
DIN 440




DIN	GV galvanized for bolt	A4 stainless steel for bolt	D [mm]	d [mm]	s [mm]
440	M6		22	6.6	2
9021	M8	M8	24	8.4	2
9021	M10	M10	30	10.5	2.5
440	M12		45	13.5	4
9021	M12	M12	37	13	3
9021	M16	M16	50	17	3
440	M20		72	22	6

Ordering example: US - M12 - GV - DIN 9021

US

Washers
DIN EN ISO
7089/
DIN 125




GV galvanized for bolt	A4 stainless steel for bolt	D [mm]	d [mm]	s [mm]
M6	M6	12	6.4	1.6
M8	M8	16	8.4	1.6
M10	M10	21	10.5	2
M12	M12	24	13	2.5
M16	M16	30	17	3
M20	M20	37	21	3
M24		44	25	4
		50	28	4
		56	31	4
FV hot-dip galvanized for bolt	A2 stainless steel for bolt	D [mm]	d [mm]	s [mm]
	M8	17	8.4	1.6
M10	M10	21	10.5	2
M12	M12	24	13	2.5
M16	M16	30	17	3

Ordering example: US - M12 - GV - DIN 125

VUS


Square washers

VUS 40/25
for profile
40/25;
HZA
41/22




FV hot-dip galvanized for bolt	A4 stainless steel for bolts	a × b × d [mm]
M10	M10	40 × 40 × 5
M12	M12	40 × 40 × 5
M16	M16	40 × 40 × 5

VUS 49/30
for profile
54/33,
49/30




M10	M10	37 × 37 × 5
M12	M12	37 × 37 × 5
M16	M16	37 × 37 × 5
M20	M20	37 × 37 × 5

VUS 52/34
for profile
52/34,
50/30




M16	M16	50 × 50 × 6
M20	M20	50 × 50 × 6

VUS 72/49
for profile
72/48,
72/49



M20	M20	54 × 54 × 6
M24	M24	54 × 54 × 6
M27	M27	54 × 54 × 6
M30	M30	54 × 54 × 6

VUS 41/41
for all
41
profiles




M6	M6	40 × 40 × 6
M10	M10	40 × 40 × 6
M12	M12	40 × 40 × 6

Ordering example: VUS 52/34 - FV - M20


Application VUS:

For shimming non-flush installation of HALFEN Anchor channels or for stand-off installations.



SIC

Locking washer




GV galvanized	A4 stainless steel	Suitable for HALFEN Bolts	
		type	dimensions
SIC - 50/30 - GV	SIC - 50/30 - A4	50/30	M16, M20
SIC - 40/22 - GV	SIC - 40/22 - A4	38/17 40/22	M16
SIC - 38/23 - GV		38/23	M16
SIC - 29/20 - GV		29/20	M12
SIC - 38/17 - GV	SIC - 38/17 - A4	38/17 40/22	M12, M10
SIC - 28/15 - GV	SIC - 28/15 - A4	28/15	M8, M10
SIC - 20/12 - GV	SIC - 20/12 - A4	20/12	M8

Ordering example: SIC - 38/17 - GV

Application SIC:

For securing HALFEN Bolts; prevents bolts turning when tightening nuts.

Assembly scheme:



HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

Threaded Rod, Hexagon Bolts, Coupler Sleeves, Ring nuts

GWS

Threaded rods
DIN 976-1




GV	A4	Length	F _{Rd}	perm.F
electroplated grade 4.6 thread	stainless steel thread	[mm]	① [kN]	[kN]
M6	M6	1000	3.1	2.2
M8	M8	1000	5.6	4.0
M10	M10	1000	9.0	6.4
M12	M12	1000	13.0	9.3
M16	M16	1000	24.2	17.3
M20	M20	1000	37.8	27.0
M24		1000	54.3	38.8

Ordering example: GWS - M12 × 1000 - GV

VBM

Coupler sleeves,
round




GV	A4	D	L	F _{Rd}	perm.F
electroplated thread	stainless steel thread	[mm]	[mm]	① [kN]	[kN]
M6	M6	10/10	15	3.1	2.2
M8	M8	12/14	20	5.6	4.0
M10	M10	13/16	25	9.0	6.4
M12	M12	16/20	30	13.0	9.3
M16	M16	21/25	40	24.2	17.3
M20	M20	26/32	50	37.8	27.0

Ordering example: VBM - A4 - M16

HSK

Hexagonal
head bolts
DIN EN ISO 4017/
DIN 933
(without nut)




Hex bolts are used
in combination with
HALFEN Threaded
plates

GV 8.8	A4	S	S
galvanized grade 8.8 dimensions	stainless steel dimensions	DIN [mm]	EN ISO [mm]
M6 × 12		10	10
M6 × 25			
M8 × 25	M8 × 25	13	13
M8 × 40			
M10 × 20			
M10 × 30	M10 × 30	17	16
M10 × 45	M10 × 45		
M10 × 60			
M10 × 70			
M12 × 22			
M12 × 25	M12 × 25	19	18
M12 × 30	M12 × 30		
M12 × 40	M12 × 40		
M12 × 50			
M12 × 60	M12 × 60		
M12 × 80	M12 × 80		
M12 × 90			
M16 × 40	M16 × 40	24	24
M16 × 60	M16 × 60		
M16 × 90	M16 × 90		

SKM

Hexagonal coup-
ler sleeves with
view holes




FV	A4	S	L	F _{Rd}	perm.F
hot-dip galvanized thread	stainless steel thread	[mm]	[mm]	① [kN]	[kN]
M10	M10	13	40	9.0	6.4
M12	M12	17	40	13.0	9.3
M16	M16	22	50	24.2	17.3

Ordering example: SKM - FV - M12

SPH

Turnbuckles
with right-
and left-hand
thread





f = min. screw
depth
M12 ≧ 10 mm
M16 ≧ 13 mm

A4	A4	D	D
stainless steel thread M12 × length L [mm]	stainless steel thread M16 × length L [mm]	for M12 [mm]	for M16 [mm]
M12 × 60	M16 × 60	16	22
M12 × 75	M16 × 75	16	22
M12 × 95	M16 × 95	16	22
M12 × 115	M16 × 115	16	22
M12 × 135	M16 × 135	16	22
perm. F = 5 kN F _{Rd} = 7 kN	perm. F = 10 kN F _{Rd} = 14 kN		

Ordering example: SPH - A4 - M12 × 75

HJV


Adjustment
coupler

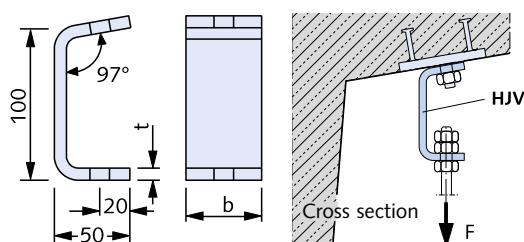

FV	A4	t	b	d	max F _{Ed}	per.F
hot-dip galvanized type	stainless steel type	[mm]	[mm]	[mm]	② [kN]	[kN]
1	1	6	40	13	2.1	1.5
2	2	8	50	17	4.6	3.3
3	3	10	50	17	7.0	5

RM

Ring nut
DIN 582
edition 2003-8



GV	d	F _{Rd}	perm. F
C15E, electroplated thread	[mm]	① [kN]	[kN]
M8	20	2.0	1.4
M10	25	3.2	2.3
M12	30	4.8	3.4
M16	35	9.8	7.0
M20	40	16.8	12.0

Ordering example: RM - GV - M12



- ① Recommended design value of the load capacity with a centric tensile stress
- ② Recommended design value of the load

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS


Adjustable Framework Construction – Accessories

Vibration absorber SDM

Material: Elastomer – Industrial quality
(EPDM) 45 ± 5 (Shore hardness)

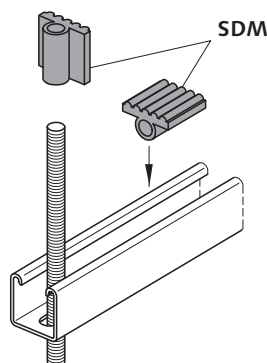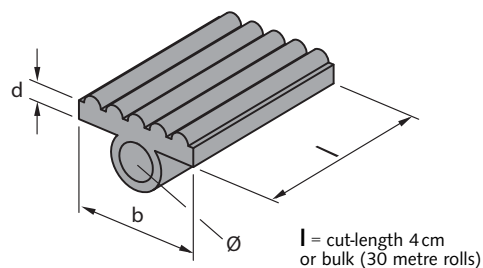

Assembly diagram

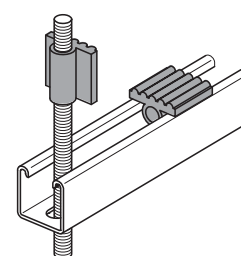

Dimensions

Article name width/thickness	Length	Order no. 0319.000-	Suitable for channel slot width [mm]	channel type	Suitable for threaded rod
SDM 41/8 -	bulk ①	00001	22	50/40, 41/41 – 41/83	Ø M12
SDM 41/8 -	4 cm - item	00002			
SDM 36/6 -	bulk ①	00003	18	36/36	Ø M10
SDM 36/6 -	4 cm - item	00004			
SDM 28/6 -	bulk ①	00005	12 - 14	28/28, 26/26, 28/15	Ø M8
SDM 28/6 -	4 cm - item	00006			

① Please indicate length [m] when ordering. Bulk for this article is 30 m.

Example; vibration absorber placement SDM

Support elements for ductwork suspensions

Fixing point
to concrete constructions:
HALFEN Channel


Threaded rod
zinc galvanized, see page 37

Vibration absorber
Material: EPDM

HALFEN Slotted channel
hot-dip galvanized, sendzimir-galvanized
channel to accommodate loads in
accordance with table

Washers, nuts
zinc galvanized, see page 36

HPE Channel end caps,
see page 39

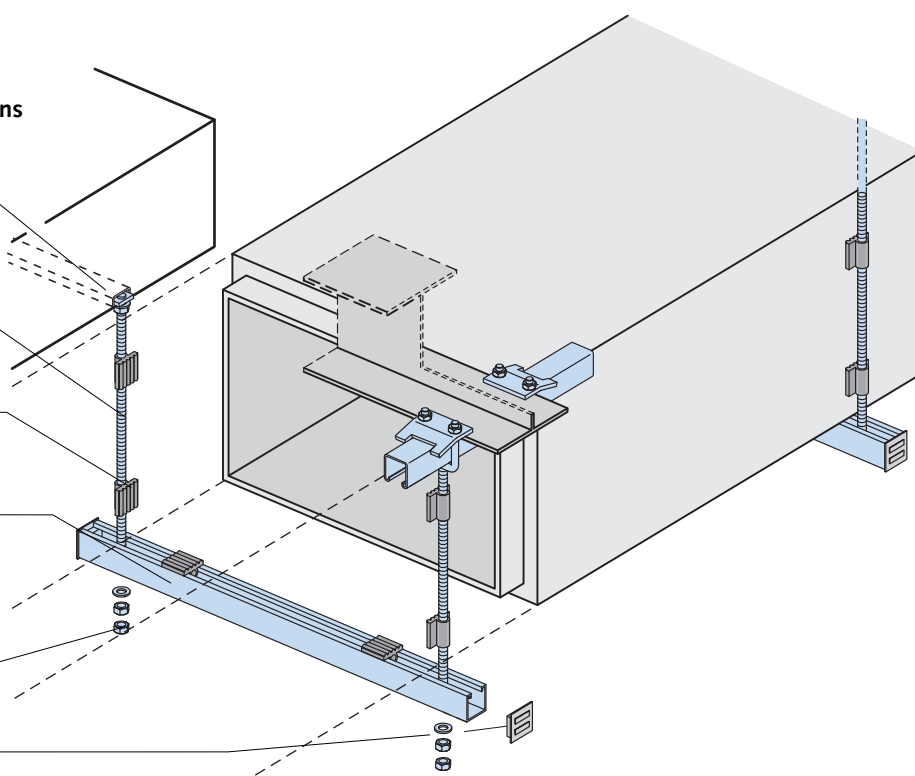

HALFEN FRAMING CHANNELS ACCESSORIES


Channel End Caps, Channel Cover Strip

HPE Channel end cap


Channel end caps (in plastic)



Type **HPE 63/63**
Colour: Blue




Type **HPE**
Colour: Black



Type **HPE 41/41**
Type **HPE 41/22**
Colour: Black

Order numbers		
Article name	Order no. 0318.	Suitable for channel
HPE 63/63	000-00010	63/63
HPE 52/34	000-00001	52/34
HPE 50/40	000-00002	50/40
HPE 41/41	000-00003	41/41
HPE 41/22	000-00004	41/22
HPE 36/36	000-00005	36/36
HPE 28/28	000-00006	28/28
HPE 28/15	000-00011	28/15
HPE 26/26	000-00007	26/26
HPE 26/18	000-00009	26/18

Assembly diagram:

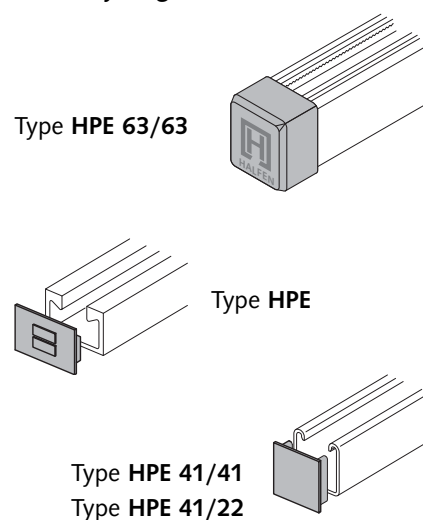


PA Channel cover

The channel cover strip provides a clean finish and protects the channel against dirt and damage.

Type overview

Type:	PA 41	PA 22	PA 18 H
	Suitable for channel: 50/40, 50/30, 486, for all 41 channels	Suitable for channel: 52/34	Suitable for channel: 36/36, 38/17
Material: Hard PVC (KS)	 white	 medium grey	 medium grey
Material: Steel sendzimir- galvanized (SV)			

Assembly diagram

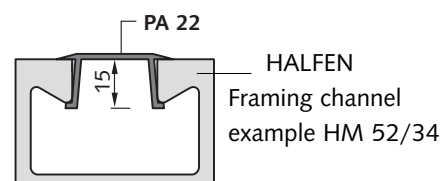

Order no.		
Type	Length [mm]	Order no. 0321.000-
PA -41- KS	- 3000	00002
PA -41- SV	- 3000	00001
PA -22- KS	- 3000	00003
PA -8H- KS	- 3000	00004

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

Pipe Clamps, Pipe Supports

HALFEN Pipe clamps and pipe supports


Adjustable pipe clamps

The HALFEN Pipe clamp range is an optimised and flexible solution used in combination with standard


HALFEN Cast-in channels and framing systems. HALFEN supplies pipe clamps of various types for pipe diameters of 15 to 530 mm.

The flexibility of the pipe fixings guarantees adjustability in all directions.


Assembly example

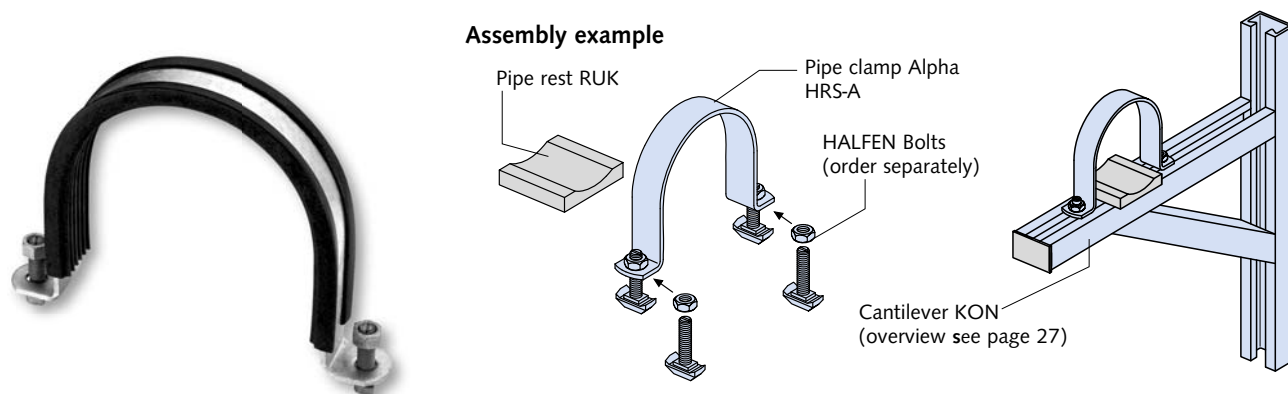


Type selection




HRS-A/HCS-RAD
Pipe clamp Alpha
(see page 41-42)




HRS-B
Pipe clamp Beta
(see page 43)




HRS-G
Pipe clamp Gamma
(see page 44)




HRS-D
Pipe clamp Delta
(see page 45)







HRG-1
Pipe support
(see page 46)



HRG-2
Pipe support
(see page 46)



Accessories
lift off safety device, pipe rests,
installation rubber (see page 47f)



HRG-4
Pipe support
(see page 46)


HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

Pipe Clamps, Pipe Supports

Pipe clamp – Type Alpha

HRS-A

Pipe clamp Alpha

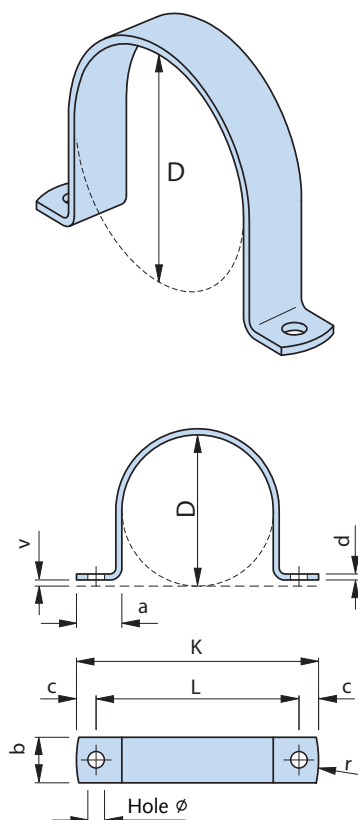

Pipe clamp HRS-A												
Type FV hot-dip galvanized		Type A4 stainless steel		Clamp-range min-max	Dimensions							Pre- tension value
Ø D [mm]	Order no. 0311.010-	Ø D [mm]	Order no. 0311.010-	[mm]	hole Ø [mm]	b/d [mm]	L [mm]	K [mm]	a [mm]	c [mm]	r [mm]	v [mm]
17	00048	17	00001	16 - 19	11 for M10	25/2.5	51	77	30	13	16	2.75
21.5	00049	21.5	00002	20.5 - 23.5			55.5	81.5				
27	00050	27	00003	26 - 29			61	87				
33.5	00051	33.5	00004	32.5 - 35.5			67.5	93.5				
42.5	00052	42.5	00005	41.5 - 44.5			76.5	102.5				
48.5	00053	48.5	00006	47.5 - 50.5			82.5	108.5				
50	00054	50	00007	49 - 52			84	110				
56	00055	56	00008	55 - 58			90	116				
60	00056	60	00009	59 - 62			94	120				
64	00057	64	00010	63 - 66			98	124				
77	00058	77	00011	76 - 79	111	137	30	13	19	4		
80	00059	80	00012	79 - 82	114	140						
84	00060	84	00013	83 - 86	118	144						
89	00061	89	00014	88 - 91	123	149						
96	00062	96	00015	95 - 98	130	156						
100	00063	100	00016	98 - 102	134	160						
105	00064	105	00017	103 - 107	139	165						
110	00065	110	00018	108 - 112	144	170						
116	00066	116	00019	114 - 118	150	176						
125	00067	125	00020	123 - 127	159	185						
131	00068	131	00021	129 - 133	11 for M10	30/4	165	191	30	13	19	4
137	00069	137	00022	135 - 139			171	197				
141	00070	141	00023	139 - 143			175	201				
150	00071	150	00024	148 - 152			184	210				
157	00072	157	00025	155 - 159			191	217				
160	00073	160	00026	158 - 162			208	240				
168	00074	168	00027	166 - 170			216	248				
176	00075	176	00028	174 - 178			224	256				
185	00076	185	00029	183 - 187			233	265				
200	00077	200	00030	198 - 202			248	280				
212	00078	212	00031	210 - 214	260	292						
218	00079	218	00032	216 - 220	266	298						
225	00080	225	00033	223 - 227	273	305						
235	00081	235	00034	233 - 237	283	315						
267	00083	267	00035	265 - 269	317	367						
273	00084	273	00036	271 - 275	323	373						
285	00085	285	00037	283 - 287	335	385						
326	00086	326	00038	324 - 328	376	426						
340	00087	340	00039	338 - 342	390	440	50	25	36	5		
355	00088	355	00040	353 - 357	405	455						
400	00089	400	00041	398 - 402	450	500						
406	00090	406	00042	404 - 408	456	506						
420	00091	420	00043	418 - 422	470	520						
429	00092	429	00044	427 - 431	479	529						
508	00093	508	00045	506 - 510	558	608						
525	00094	525	00046	523 - 527	575	625						
532	00095	532	00047	530 - 534	582	635						

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

Pipe Clamps, Pipe Supports


Pipe clamp – assembly set

HCS-RAD

Pipe clamp assembly set with DGM Installation rubber and pipe rest RUV and RUK

Set includes:

- 1 × Pipe clamp Alpha
 - 1 × installation rubber DGM (bulk length)
 - 1 × Pipe rest RUV or RUK
- Order matching T-head bolts separately!

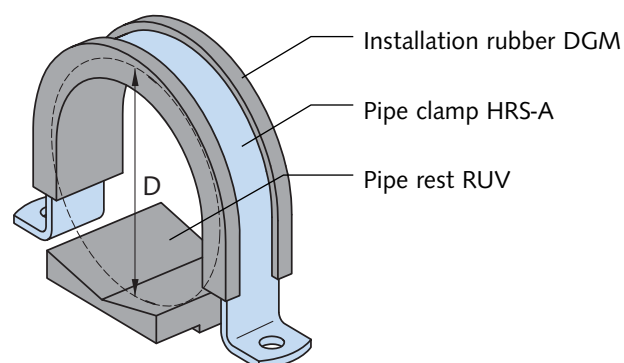

Note:

When using DGM Installation rubber always use a RUK or RUV pipe rest.

For pipe clamps with installation rubber the effective diameter is $D_{\text{eff}} = \text{diameter } D - 16 \text{ mm}$.

Pipe clamps are suitable for pipe-diameters as listed in the table (see clamp-range value).

Pipe clamp – assembly set HCS-RAD

Material FV hot-dip galvanized		Material A4 stainless steel		Clamp-range min-max	Dimensions DGM
Ø D ① [mm]	Order no. 0303.010-	Ø D ① [mm]	Order no. 0303.010-	[mm]	Length [mm]
					Type DGM 25/8
33.5	00042	33,5	00001	16.5 - 21.5	1 × 75
42.5	00043	42,5	00002	25.5 - 30.5	1 × 75
48.5	00044	48,5	00003	31.5 - 36.5	1 × 120
50	00045	50	00004	33 - 38	1 × 120
56	00046	56	00005	39 - 44	1 × 120
60	00047	60	00006	43 - 48	1 × 150
64	00048	64	00007	47 - 52	1 × 150
77	00049	77	00008	60 - 65	1 × 180
80	00050	80	00009	63 - 68	1 × 180
84	00051	84	00010	67 - 72	1 × 180
89	00052	89	00011	72 - 77	1 × 210
96	00053	96	00012	79 - 84	1 × 210
					Type DGM 30/8
100	00054	100	00013	83 - 88	1 × 250
105	00055	105	00014	88 - 93	1 × 250
110	00056	110	00015	93 - 98	1 × 250
116	00057	116	00016	99 - 104	1 × 250
125	00058	125	00017	108 - 113	1 × 305
131	00059	131	00018	114 - 119	1 × 305
137	00060	137	00019	120 - 125	1 × 305
141	00061	141	00020	124 - 129	1 × 305
150	00062	150	00021	133 - 138	1 × 355
157	00063	157	00022	140 - 145	1 × 355
					Type DGM 40/8
160	00064	160	00023	143 - 148	1 × 395
168	00065	168	00024	151 - 156	1 × 395
176	00066	176	00025	159 - 164	1 × 395
185	00067	185	00026	168 - 173	1 × 450
200	00068	200	00027	183 - 188	1 × 450
212	00069	212	00028	195 - 200	1 × 500
218	00070	218	00029	201 - 206	1 × 500
225	00071	225	00030	208 - 213	1 × 560
235	00072	235	00031	218 - 223	1 × 560
					Type DGM 50/8
267	00073	267	00032	250 - 255	1 × 650
273	00074	273	00033	256 - 261	1 × 650
285	00075	285	00034	268 - 273	1 × 700
326	00076	326	00035	309 - 314	1 × 800
340	00077	340	00036	323 - 328	1 × 800
355	00078	355	00037	338 - 343	1 × 860
400	00079	400	00038	383 - 388	1 × 1015
406	00080	406	00039	389 - 394	1 × 1015
420	00081	420	00040	403 - 408	1 × 1015
429	00082	429	00041	412 - 417	1 × 1015
508		508		491 - 496	1 × 1295
525		525		508 - 513	1 × 1295
532		532		515 - 520	1 × 1295

① Ø D = Nominal diameter of pipe clamp without installation rubber

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

Pipe Clamps, Pipe Supports



Pipe clamp – Type Beta

HRS-B


Pipe clamp Beta

Set includes:

- 1 × Pipe clamp HRS-B
- 2 × Hex. head bolts
- 2 × Nuts

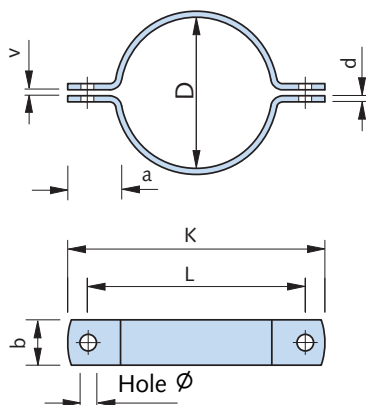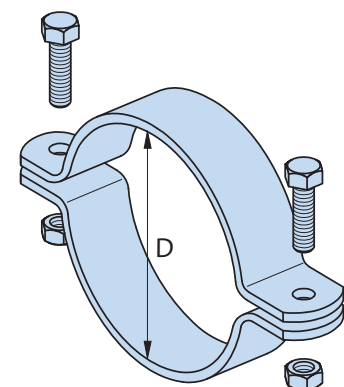

Accessory:



DGM Installation rubber
(see page 49)

Pipe clamp HRS-B											
Material FV hot-dip galvanized		Material A4 stainless steel		Clamp-range min - max [mm]	Dimensions					Pre- tension value [mm]	allow. load capacity [kN]
Ø D [mm]	Order no. 0311.030-	Ø D [mm]	Order no. 0311.030-		Hole Ø [mm]	b/d [mm]	L [mm]	K [mm]	a [mm]		
21.5	00049	21.5	00002	20.5 - 23.5	6,5 for M6	25/2.5	49.5	71.5	25	2.75	1.9
27	00050	27	00003	26 - 29			55	77			
33.5	00051	33.5	00004	32.5 - 35.5			61.5	83.5			
42.5	00052	42.5	00005	41.5 - 44.5			70.5	92.5			
48.5	00053	48.5	00006	47.5 - 50.5			76.5	98.5			
50	00054	50	00007	49 - 52			78	100			
56	00055	56	00008	55 - 58	8,5 for M8	25/2.5	84	106	25	2.75	1.9
60	00056	60	00009	59 - 62			88	110			
64	00057	64	00010	63 - 66			92	114			
77	00058	77	00011	76 - 79			105	127			
80	00059	80	00012	79 - 82			108	130			
84	00060	84	00013	83 - 86			112	134			
89	00061	89	00014	88 - 91	11 for M10	30/4	118	140	35	4	4.1
96	00062	96	00015	95 - 98			125	147			
100	00063	100	00016	98 - 102			144	170			
105	00064	105	00017	103 - 107			149	175			
110	00065	110	00018	108 - 112			154	180			
116	00066	116	00019	114 - 118			160	186			
125	00067	125	00020	123 - 127	13 for M12	40/4	169	195	40	4	4.9
131	00068	131	00021	129 - 133			175	201			
137	00069	137	00022	135 - 139			181	207			
141	00070	141	00023	139 - 143			185	211			
150	00071	150	00024	148 - 152			194	220			
157	00072	157	00025	155 - 159			201	227			
160	00073	160	00026	158 - 162	17 for M16	50/5	208	240	50	5	7.8
168	00074	168	00027	166 - 170			216	248			
176	00075	176	00028	174 - 178			224	256			
185	00076	185	00029	183 - 187			233	265			
200	00077	200	00030	198 - 202			248	280			
212	00078	212	00031	210 - 214			260	292			
218	00079	218	00032	216 - 220	17 for M16	60/6	266	298	55	5	9.7
225	00080	225	00033	223 - 227			273	305			
235	00081	235	00034	233 - 237			283	315			
267	00082	267	00035	265 - 269			317	367			
273	00083	273	00036	271 - 275			323	373			
285	00084	285	00037	283 - 287			335	385			
326	00085	326	00038	324 - 328	17 for M16	60/6	376	426	55	5	9.7
340	00086	340	00039	338 - 342			390	440			
355	00087	355	00040	353 - 357			415	465			
400	00088	400	00041	398 - 402			460	510			
406	00089	406	00042	404 - 408			466	516			
420	00090	420	00043	418 - 422			480	530			
429	00091	429	00044	427 - 431	17 for M16	60/6	489	539	55	5	9.7
508	00092	508	00045	506 - 510			568	618			
525	00093	525	00046	523 - 527			585	635			
532	00094	532	00047	530 - 534			592	642			

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

Pipe Clamps, Pipe Supports



Pipe clamp – Type Gamma

HRS-G

Pipe clamp Gamma

Set includes:


- 1 × Pipe clamp Gamma
- 2 × Hex. head bolts
- 2 × Nuts

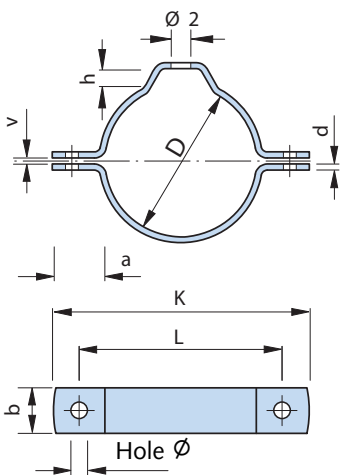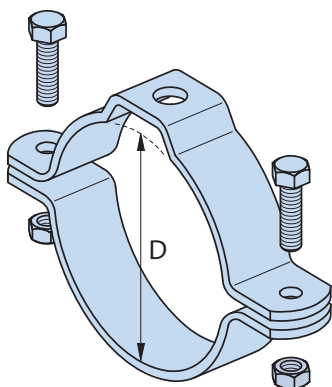

Pipe clamp HRS-G

Material FV hot-dip galvanized		Material A4 stainless steel		Clamp- range min-max	Hole Ø [mm]	Dimensions							Pre- tension value	allow. load capacity
Ø D [mm]	Order no. 0311.060-	Ø D [mm]	Order no. 0311.060-			b/d [mm]	L [mm]	K [mm]	a [mm]	h [mm]	Ø 2 [mm]	v [mm]		
64	00030	64	00001	63 - 66	8.5 for M8	25/2.5	92	114	25	9	11	2.75	1.9	
77	00031	77	00002	76 - 79			105	127						
80	00032	80	00003	79 - 82			108	130						
89	00033	89	00004	88 - 91			118	140						
96	00034	96	00005	95 - 98			125	147						
100	00035	100	00006	98 - 102	11 for M10	30/4	144	170	35	11	13	4	4.1	
105	00036	105	00007	103 - 107			149	175						
110	00037	110	00008	108 - 112			154	180						
116	00038	116	00009	114 - 118			160	186						
125	00039	125	00010	123 - 127			169	195						
131	00040	131	00011	129 - 133			175	201						
137	00041	137	00012	135 - 139			181	207						
141	00042	141	00013	139 - 143			185	211						
150	00043	150	00014	148 - 152			194	220						
157	00044	157	00015	155 - 159			201	227						
160	00045	160	00016	158 - 162	13 for M12	40/4	208	240	40	14	17	4	4.9	
168	00046	168	00017	166 - 170			216	248						
176	00047	176	00018	174 - 178			224	256						
185	00048	185	00019	183 - 187			233	265						
200	00049	200	00020	198 - 202			248	280						
212	00050	212	00021	210 - 214			260	292						
218	00051	218	00022	216 - 220			266	298						
225	00052	225	00023	223 - 227			273	305						
235	00053	235	00024	233 - 237	17 for M16	50/5	283	315	50	18	17	5	7.8	
267	00054	267	00025	265 - 269			317	367						
273	00055	273	00026	271 - 275			323	373						
285	00056	285	00027	283 - 287			335	385						
326	00057	326	00028	324 - 328			376	426						
340	00058	340	00029	338 - 342			390	440						

Accessory:



DGM Installation rubber
(see page 49)

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

Pipe Clamps, Pipe Supports


Pipe clamp – Type Delta

HRS-D


Pipe clamps Delta

Set includes:

- 1 × Pipe clamp with hexagonal rod coupler, pivoted and permanently fixed to pipe clamp
- 2 × Hex. head bolts
- 2 × Nuts

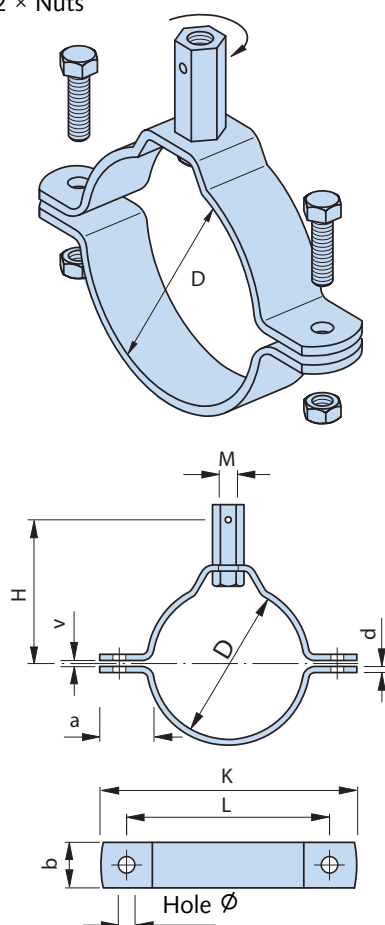

Accessory:




DGM Installation rubber (see page 49)

Pipe clamp HRS-D

Material FV hot-dip galvanized	Order no. 0311.050-	Material stainless steel A4	Order no. 0311.050-	Clamp range min-max [mm]	Hole Ø [mm]	Dimensions					M [mm]	Pre- tension value v [mm]	allow. load capa- city [kN]
						b/d [mm]	L [mm]	K [mm]	a [mm]	H [mm]			
64	00030	64	00001	63 - 66	8 for M8	25/2.5	92	114		78	M10 x40 ①	2.75	1.9
77	00031	77	00002	76 - 79			105	127		85			
80	00032	80	00003	79 - 82			108	130	25	86			
89	00033	89	00004	88 - 91			118	140		91			
96	00034	96	00005	95 - 98			125	147		94			
100	00035	100	00006	98 - 102	11 for M10	30/4	144	170		98	M12 x40 ①	4	4.1
105	00036	105	00007	103 - 107			149	175		100			
110	00037	110	00008	108 - 112			154	180		103			
116	00038	116	00009	114 - 118			160	186		106			
125	00039	125	00010	123 - 127			169	195	35	110			
131	00040	131	00011	129 - 133			175	201		113			
137	00041	137	00012	135 - 139			181	207		116			
141	00042	141	00013	139 - 143			185	211		118			
150	00043	150	00014	148 - 152	13 for M12	40/4	194	220		123	M16 x50 ①	4	4.9
157	00044	157	00015	155 - 159			201	227		126			
160	00045	160	00016	158 - 162			208	240		139			
168	00046	168	00017	166 - 170			216	248		143			
176	00047	176	00018	174 - 178			224	256		147			
185	00048	185	00019	183 - 187			233	265		151			
200	00049	200	00020	198 - 202			248	280	40	159			
212	00050	212	00021	210 - 214			260	292		165			
218	00051	218	00022	216 - 220	17 for M16	50/5	266	298		168	M16 x50 ①	5	7.8
225	00052	225	00023	223 - 227			273	305		171			
235	00053	235	00024	233 - 237			283	315		176			
267	00054	267	00025	265 - 269			317	367		197			
273	00055	273	00026	271 - 275			323	373		200			
285	00056	285	00027	283 - 287			335	385	50	206			
326	00057	326	00028	324 - 328			376	426		227			
340	00058	340	00029	338 - 342			390	440		234			

① with monitor hole

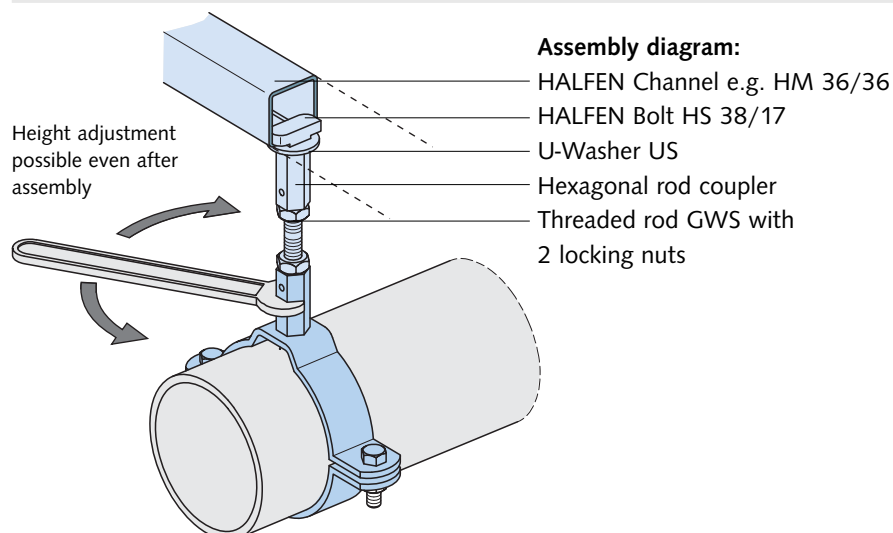

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS


Pipe Clamps, Pipe Supports

HRG Pipe support

HRG-1

for pipe diameters
D = 21.5 up to 185 mm


Pipe clamp type Beta

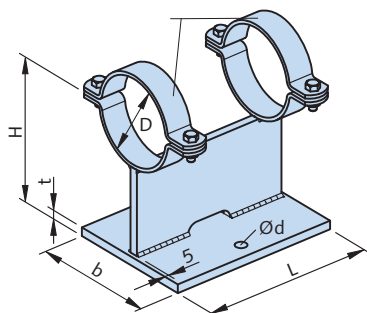

HRG-2


for pipe diameters
D = 176 up to 532 mm

Pipe clamp type Beta

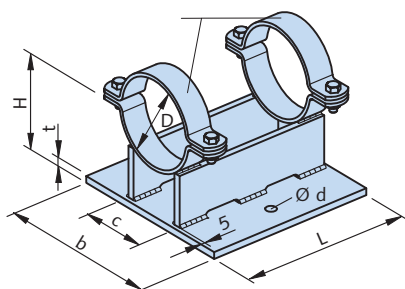

HRG-4 sliding support

Clamps acc. to DIN 3567, shape A
for nominal pipe diameters
DN = 15 up to DN 200 mm

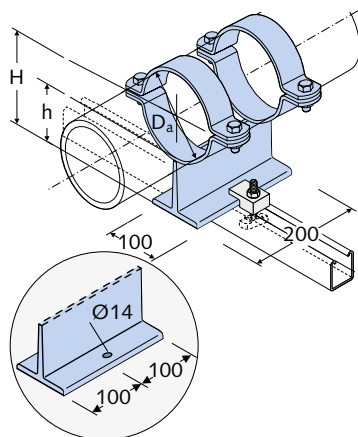

Pipe support HRG-1

HRG-1	Material: FV hot-dip galvanized	Material: A4 stainless steel	Dimensions [mm]				
for pipe- Ø D	Order no. 0291.-009-	Order no. 0291.009-	H	L	b	Ø d	t
21,5 - 60	00004 ①	00001 ①	100	130	80	11	5
63 - 84			125	150	100	11	8
89 - 131			150	180	100	11	8
137 - 141			175	200	120	11	10
150 - 185			200	200	150	13	10

① When ordering please state the required pipe clamp diameter-Ø [mm].
Available diameters of pipe clamps see HRS-B, see page 43.
Note: Consider using a larger diameter clamp when using a DGM Installation rubber.

Pipe support HRG-2

HRG-2	Material: FV hot-dip galvanized	Material: A4 stainless steel	Dimensions [mm]					
for pipe- Ø D	Order no. 0291.-009-	Order no. 0291.009-	H	L	b	c	Ø d	t
176 - 185	00005 ①	00002 ①	200	200	200	80	17	8
200 - 235			200	200	200	100	17	8
267 - 273			250	250	200	100	17	8
285			250	250	225	125	17	8
326			250	300	250	150	17	10
340 - 355			300	300	250	150	17	10
400 - 429			350	300	250	150	17	10
508 - 532			400	400	300	200	22	15

① When ordering please state the required pipe clamp diameter-Ø [mm].
Available diameters of pipe clamps see HRS-B, see page 43.
Note: Consider using a larger diameter clamp when using a DGM Installation rubber.

Pipe support HRG-4

For Pipe-Ø D _a	Material: FV hot-dip galvanized	Order no.	Dimensions [mm]
21.3	HRG 4 - 21	0291.040-00001	H
33.7	HRG 4 - 33	0291.040-00002	116
48.3	HRG 4 - 48	0291.040-00003	122
60.3	HRG 4 - 60	0291.040-00004	129
76.1	HRG 4 - 76	0291.040-00009	136
88.9	HRG 4 - 89	0291.040-00005	144
114.3	HRG 4 - 116	0291.040-00006	150
139.7	HRG 4 - 141	0291.040-00007	166
168.3	HRG 4 - 168	0291.040-00008	178
219.1	HRG 4 - 219	0291.040-00010	192
			217.5

① When ordering please state the required pipe clamp diameter-Ø [mm].
Note: Consider using a larger diameter clamp when using a DGM Installation rubber.



HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

Pipe Clamps, Pipe Supports – Accessories

Lift off safety device AHS

AHS


Lift off safety device for pipe T-supports

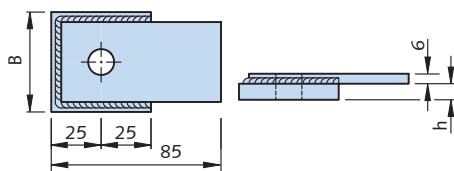

Other dimensions on request

Lift off safety device AHS				
Type	Order no. 0324.000-	B [mm]	h [mm]	Ø d [mm]
AHS -1- FV	00001	50	8.0	13
AHS -2- FV	00002	50	10.0	13
AHS -3- FV	00003	50	12.0	13
AHS -4- FV	00004	70	20.0	17
AHS -1- A4	00005	50	8.0	13
AHS -2- A4	00006	50	10.0	13
AHS -3- A4	00007	50	12.0	13
AHS -4- A4	00008	70	20.0	17

Assembly diagram:

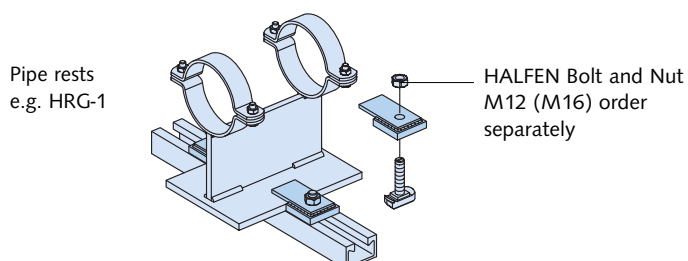


Lift off safety device AHS (used in pairs)


Pipe Rest

Pipe Rest RUK


Material: Polypropylene,
Temperature resistant
from -30 to +90°C,
Colour: Green

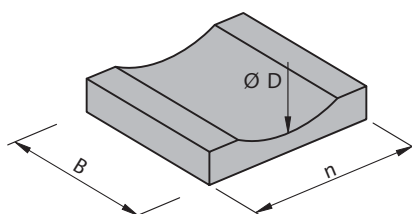


d2 = diameter of studs
Ø 10 – 30 mm (see table)



Channel slot width > d2




Channel slot width < d2



HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

Pipe Clamps, Pipe Supports – Accessories

Assembly example

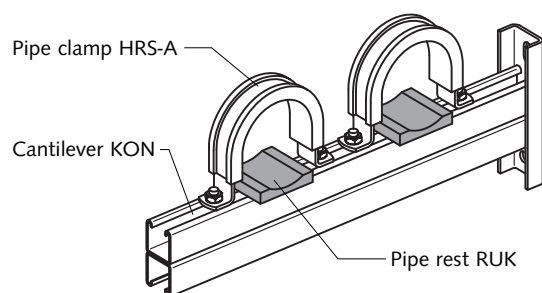



Pipe rest RUK					
Type	Order no. 0316.000-	for Ø D [mm]	Dimensions [mm]		
			n	B	d2
RUK - 57	00001	57	38	50	10
RUK - 60	00002	60			
RUK - 76	00003	76			
RUK - 88	00004	88	75	70	15
RUK - 108	00005	108			
RUK - 114	00006	114			
RUK - 133	00007	133			
RUK - 139	00008	139			
RUK - 159	00009	159	140	75	25
RUK - 168	00010	168			
RUK - 193	00011	193			
RUK - 216	00012	216			
RUK - 219	00013	219			
RUK - 267	00014	267			
RUK - 273	00015	273			
RUK - 318	00016	318	220	75	30
RUK - 323	00017	323			
RUK - 355	00018	355			
RUK - 368	00019	368			
RUK - 406	00020	406			
RUK - 419	00021	419			
RUK - 508	00022	508			
RUK - 521	00023	521			

Pipe rests RUV-K, RUV-M, RUV-G

Pipe rest for various pipe diameters.
 Cost efficient alternative as one size RUV is suitable for various pipe sizes.
 The pipe rest is made of durable plastic (two-point-support).

Material: Polypropylene,
 Temperature resistant from -30 to +90° C,
 Colour: Black

Assembly example:

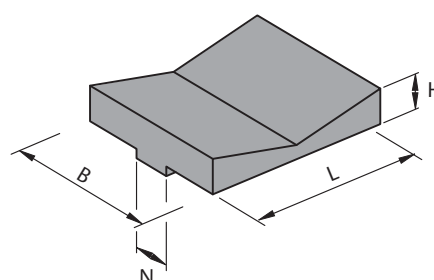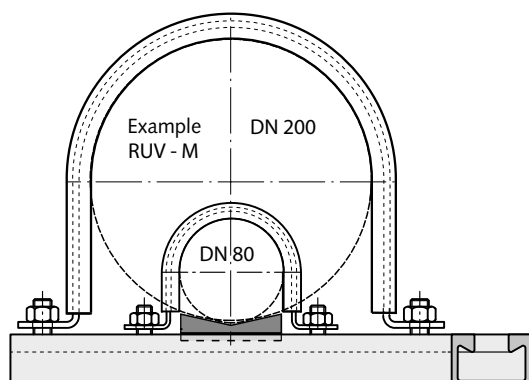

Pipe rest RUV						
Type	Order no. 0317.000-	for Ø D [mm]	L [mm]	B [mm]	N [mm]	H [mm]
RUV-K	0001	25 - 79	30	50	11	11
RUV-M	0002	80 - 269	80	70	17	15
RUV-G	0003	270 - 420	120	70	17	16

Type **RUV-K** for HALFEN Framing channels:
 min. 12 mm slot width, max. 52 mm channel width

Type **RUV-M** for HALFEN Framing channels:
 min. 18 mm slot width, max. 72 mm channel width

Type **RUV-G** for HALFEN Framing channels:
 min. 18 mm slot width, max. 72 mm channel width


HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

Pipe Clamps, Pipe Supports – Accessories

Installation rubber DGM

Installation rubber DGM (bulk-ware) for HALFEN Pipe clamps.

Material:
EPDM temperature resistant
from - 40°C to +110° C



Note:

When using a DGM Installation rubber
always use a RUK or RUV pipe rest
(see pages 47-48).

Order numbers and lengths					
Pipe clamps-Ø D ①	Clamping range for DGM min. -max.	Length	DGM Installation rubber Type b/d [mm]		② Order no. 0320.000-
[mm]	[mm]	[mm]	Pipe clamp HRS-A	Pipe clamp HRS-B, -G, -D	
21.5		-	DGM 25/8		00001
27					
33.5	16.5 - 21.5	2 × 50			
42.5	25.5 - 30.5				
48.5	31.5 - 36.5	2 × 70			
50	33 - 38				
56	39 - 44	2 × 85			
60	43 - 48				
64	47 - 52	2 × 110			
77	60 - 65				
80	63 - 68	2 × 130			
84	67 - 72				
89	72 - 77	2 × 155	DGM 30/8		00002
96	79 - 84				
100	83 - 88	2 × 175			
105	88 - 93				
110	93 - 98	2 × 190			
116	99 - 104				
125	108 - 113	2 × 220			
131	114 - 119				
137	120 - 125	2 × 240			
141	124 - 129				
150	133 - 138	2 × 270	DGM 40/8		00003
157	140 - 145				
160	143 - 148	2 × 295			
168	151 - 156				
176	159 - 164	2 × 310			
185	168 - 173				
200	183 - 188	2 × 345			
212	195 - 200				
218	201 - 206	2 × 405			
225	208 - 213				
235	218 - 223	2 × 435	DGM 50/8	DGM 50/8	00004
267	250 - 255				
273	256 - 261	2 × 490			
285	268 - 273				
326	309 - 314	2 × 530			
340	323 - 328				
355	338 - 343	2 × 530	DGM 50/8	DGM 60/8	00005
400	383 - 388				
406	389 - 394	2 × 625			
420	403 - 408				
429	412 - 417	2 × 790			
508	491 - 496				
525	508 - 513				
532	515 - 520				

① Ø D = nominal diameter of the pipe clamp without installation rubber.

With insulated pipe clamp the effective diameter $D_{eff} = Ø D - 16 \text{ mm}$

② Please specify required length [m] when ordering.

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

Pipe Weights and Support Spacing

Threaded pipes, steel pipes			
Pipe outer diameter Ø ① [mm]	Pipe weight (empty) [kg/m]	Pipe weight (water filled) [kg/m]	Support spacing max. [m]
Threaded pipes according to DIN 10255 (medium duty)			
17.2	0.89	1.01	1.35
21.3	1.27	1.47	1.50
26.9	1.65	2.02	1.80
33.7	2.55	3.13	2.10
42.4	3.28	4.30	2.40
48.3	3.77	5.15	2.60
60.3	5.33	7.55	3.00
76.1	6.80	10.52	3.20
88.9	8.85	13.98	3.50
114.3	12.60	21.30	4.20
139.7	16.90	30.17	4.60
165.1	20.10	39.06	5.30
Steel pipe (heating pipes) according to DIN EN 10220			
17.2	0.69	0.83	1.40
21.3	0.96	1.2	1.60
26.9	1.41	1.8	1.85
33.7	2.01	2.65	2.15
44.5	2.70	3.91	2.50
48.3	2.95	4.41	2.60
51.0	3.12	4.77	2.70
57.0	3.90	5.96	2.80
60.3	4.14	6.47	3.00
63.5	4.36	6.97	3.00
76.1	5.28	9.16	3.50
82.5	6.31	10.86	3.65
88.9	6.81	12.15	3.80
101.6	8.76	15.76	4.00
108.0	9.33	17.31	4.10
114.3	9.90	18.9	4.20
127.0	12.20	23.32	4.35
133.0	12.80	25.07	4.40
139.7	13.50	27.12	4.50
152.4	16.40	32.54	4.75
159.0	17.10	34.76	4.80
168.3	18.10	36.93	4.90
177.8	21.30	43.4	5.00
193.7	25.00	51.26	5.20
219.1	31.00	64.73	5.50
267.0	40.60	91.40	5.90
273.0	41.60	95.40	5.90
298.5	51.10	117.60	6.20
318.0	57.40	129.50	6.40 ⑤
323.9	55.60	130.85	6.40 ⑤
406.4	85.90	204.40	7.10 ⑤
508.0	135.00	320.50	8.00 ⑤

Drainage pipes			
Pipe outer diameter Ø max. ①	Pipe weight (empty)	Pipe weight (water filled)	Support spacing max.
[mm]	[kg/m]	[kg/m]	[m]
Drainage pipe GA DIN 19 500 (previous version)			
60	5.300	7.505	0.60
80	7.100	11.283	0.80
112	10.300	18.791	1.15
137	13.700	26.763	1.35
162	17.300	35.437	1.60
212	32.700	64.100	2.00
Drainage pipe Cast iron (SML, ML)			
58	4.300	6.400	approx. 1.50 ②
78	5.900	9.900	
110	8.400	17.700	
135	11.800	24.500	
160	14.100	32.300	
210	23.100	54.600	
274	33.300	87.700	
326	43.200	120.800	
429	75.500	208.800	
532	104.300	311.800	
635	137.100	434.200	
Drainage pipe PE (Geberit)			
32	0.273	0.804	0.32 ③
40	0.348	1.255	0.40 ③
50	0.443	1.963	0.50 ③
56	0.500	2.463	0.56 ③
63	0.566	3.116	0.63 ③
75	0.679	4.416	0.75 ③
90	0.952	6.360	0.90 ③
110	1.432	9.503	1.10 ③
125	1.817	12.271	1.25 ③
140	2.287	15.391	1.40 ③
160	3.004	20.106	1.60 ③
200	3.830	31.457	2.00 ③
250	6.019	49.150	2.50 ③
Drainage pipe, hard PVC			
50	0.244	1.284	0.50
63	0.308	1.998	0.60
75	0.490	3.930	0.75
110	1.025	8.006	1.10
125	1.351	12.430	1.25
160	2.158	18.031	1.60

Copper pipes			
Pipe outer diameter Ø ④ [mm]	Pipe weight (empty) [kg/m]	Pipe weight (water filled) [kg/m]	Support spacing max. [m]
Copper pipes DIN EN 1057 and 12449, (bright rolled)			
10	0.252	0.302	≤ 0.50
12	0.308	0.387	
15	0.391	0.524	≤ 1.00
18	0.475	0.676	
22	0.587	0.901	≤ 1.50
28	1.110	1.601	
35	1.420	2.214	
42	1.700	2.894	≤ 2.00
54	2.910	4.873	
64	3.470	6.296	
70	3.800	7.219	
74	4.030	7.877	
80	4.360	8.894	≤ 2.00 -3.00
104	5.700	13.550	
125	10.200	21.316	
131	10.700	22.966	

① For pipe clamps with DGM the additional dimensions of the rubber must be considered → See page 49

② Manufacturers of cast iron require that each pipe section be supported at least twice and corner elements i.e. shaped pipes each have a dedicated support.

③ According to manufacturer 10 × Ø.

④ For pipes with standard wall thickness.

⑤ Observe the capacity of the pipe clamps; reduce the span if required.

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

Pipe Dimensions

Pipe Dimensions															
Threaded pipe DIN EN 10255 (medium and heavy)			Seamless steel pipe DIN EN 10220 DIN 2460 heating pipe		Insulated copper pipe Wicu-Pipe Standard with web coat		Bright copper pipe DIN EN 1057	Steel drainage pipe DIN 19 530 Loro. Steel plastic coated		Cast iron drain pipe GA DIN 19 500 and SML (old version)		Eternit-pipe DIN 19 830 (prior version)		PVC DIN 19531-10 PP DIN 19 560-10 ABS DIN 19 561-10 Rotstrich HT	
DN	Inches	Da	DN	Da	pipe Da	insul. Da	DN	DN	Da	DN	Da	DN	Da	DN	Da
							12								
							15								
10	3/8	17.2	10	17.2	12	16									
15	1/2	21.3	15	21.3	15	19	18/22								
20	3/4	26.9	20	26.9	18/22	23/27	28								
25	1	33.7	25	33.7	28	33	35							30	32
					35	40									
32	1 1/4	42.4	32	44.5			42	40	42					40	42.5
40	1 1/2	48.3	40	48.3	42	48				40	48				
			46	51										50	50
			50	57			54	50	53	50	58				
50	2	60.3	50	60.3	54	60					60				
			57	63.5			64/65					50	64		
65	2 1/2	76.1	65	76.1			76	70	73	70	78			70	75
											80				
			76	82.5			85					70	84		
80	3	88.9	80	88.9			89								
			94	101.6			100	100	102						
			100	108						100	110			100	110
100	4	114.3	100	114.3								100	116		
			113	121											
				127			125							125	125
			125	133			133	125	133	125	133				
											137				
125	5	139.7	125	139.7								125	141		
			150	159			159	150	159	150	160			150	160
150	6	165.1	150	168.3								150	168		
				177.8											
			175	193.7											
														200	200
										200	210				
			200	219.1			219	200	219			200	220		
				267											
			250	273						250	274	250	274		
				298.5											
				318											
			300	323.9						300	326	300	326		
			350	355.6						350	355				
			400	406.4											
										400	429				
			500	508											
										500	532				

DN = nominal diameter; Da = outer pipe diameter

Dimensions in mm (in inches, where stated)

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

Pipe Dimensions, Selection of Pipe Clamps

Pipe Dimensions													
PE DIN 19 535-10 (Geberit, Akatherm, Riamer, Supralen)		PVC Drainage pipe DIN 19 531		PVC Pressure pipe DIN 19 532 and DIN 8062		PE - Soft-pressure pipe DIN 19 533 (prior version) (Supralen)							
DN	Da	DN	Da	DN	Da	DN	Da	Type Alpha Ø D [mm]	Type Alpha with DGM and RUV Ø D [mm]	Type Beta Ø D [mm]	Type Beta/ Gamma with DGM Ø D [mm]	Type Delta/ Gamma Ø D [mm]	Type Delta/ Gamma with DGM Ø D [mm]
				10	16			17					
				15	20			21.5		21.5			
								27	42.5	27	42.5		
	32	25	32	25	32	20	32	33.5	48.5	33.5	48.5		
	40	32	40	32	40	25	40	42.5	56	42.5	56		
								42.5	56	42.5	56		
								48.5	64	48.5	64		64
40	50	50	50	40	50	32	50	50	64	50	64		64
50	56							56	64	56	64		64
								60	77	60	77		77
60	63	60	63	50	63	40	63	64	80	64	80	64	80
70	75	70	75	65	75	50	75	77	89	77	89	77	89
								80	96	80	96	80	96
								84	100	84	100	84	100
80	90		90	80	90		90	89	105	89	105	89	105
								100	116	100	116	100	116
100	110	100	110	100	110	65	110	110	125	110	125	110	125
								116	131	116	131	116	131
								125	141	125	141	125	141
125	125	125	125	125	125	80	125	125	141	125	141	125	141
								131	150	131	150	131	150
								137	150	137	150	137	150
	140		140		140			141	157	141	157	141	157
150	160	150	160	150	160			160	176	160	176	160	176
								168	185	168	185	168	185
								176	185	176	185	176	185
								200	212	200	212	200	212
200	200	200	200	200	200			200	212	200	212	200	212
								212	225	212	225	212	225
								218	235	218	235	218	235
250	250								267		267		267
								267	285	267	285	267	285
								273	285	273	285	273	285
300	315	300	315						326		326		326
								326	340	326	340	326	340
								355		355			
400	400	400	400					400	420	400	420		
								406	420	406	420		
								429		429			
								508	525	508	525		
								532		532			

DN = nominal diameter; Da = outer pipe diameter

Ø D = nominal clamp diameter (see table pages 41f.)

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

Pipe Fixing under Bridges

Regulations, standards and basic rules

Reference drawings for civil engineering structures (RIZ-Ing), Published 2015
planning requirements for the drainage of bridges


- Mandatory drawings WAS 5, 6, 13 and 15.
- Execution according to the annex for technical-conditions for contracts, (ZTV-Ing 8-5 *Zusätzlichen Technischen Vertragsbedingungen*).

Additional technical contracting conditions for civil engineering structures
(German regulation ZTV-ING), Publ. 2017, part 8, section 5:

"Pipe Supports and fixing connections (...) must be made of stainless steel grade A4 or A5 material no 1.4401 or 1.4571 according to EN 10088 and EN ISO 3506."


Standard catalogue of work specifications (STLK)

The standard catalogue of work specifications for water structures (STLK), issued by the German Federal ministry for transport, and digital communication (*BMVI - Bundesministerium für Verkehr und digitale Infrastruktur*) standardizes the text required for the bidding procedure in water structure projects. It expands on the contract procedures for construction work in Germany as well as on the technical regulations for excavation projects, especially the annex for technical-conditions for contracts, (ZTV-ING).

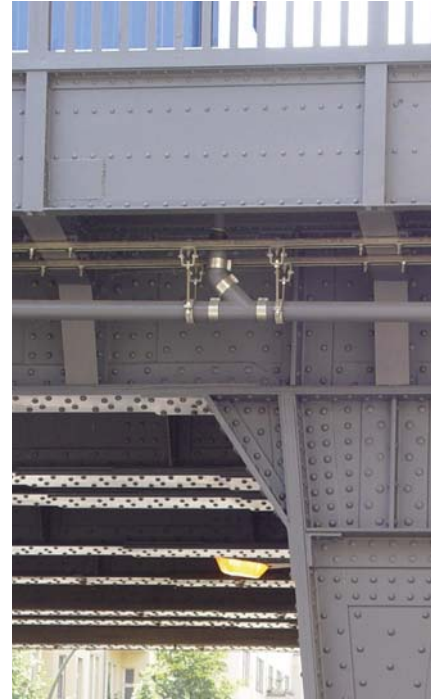

Support structures for pipes under bridges, which are not covered by WAS regulations

The large range of HALFEN Channels, T-bolts and accessories in stainless steel grade A4 enables support structures, even with difficult boundary conditions, to be successfully completed according to customer requirements. We offer technical support for clients; we supply efficient solutions for various types of projects.

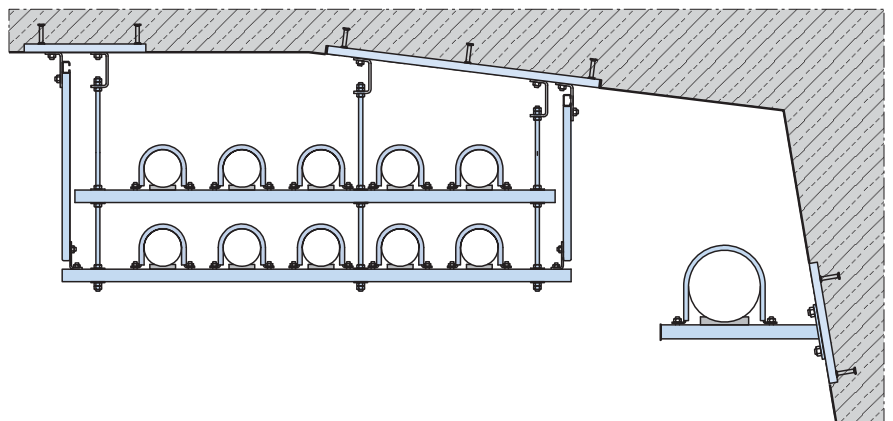

For more information contact HALFEN


Please see the back page of this catalogue for regional contact addresses.
www.halfen.com

HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

Pipe Fixing under Bridges

Specification examples


WAS 5 or WAS 6

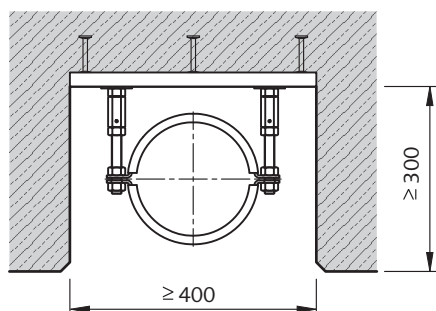

Specification text:

HALFEN Pipe fastener according to WAS 6.
Supply and install _____ piece(s) HALFEN Pipe fastener according to WAS 6, material stainless steel W 1.4571/ 1.4401 (A4) for DN ____.


WAS 15



Specification text:

HALFEN Pipe fastener according to WAS 15.
Supply and install _____ piece(s) HALFEN Pipe fastener according to WAS 15, material stainless steel W 1.4571/ 1.4401 (A4) for DN ____.


WAS 13 Figure 1 – Rigid fixing



Specification text:

HALFEN Pipe fastener (rigid) according to WAS 13.
Supply and install _____ piece(s) HALFEN Pipe fastener according to WAS 13, material stainless steel W 1.4571/ 1.4401 (A4) for DN ____ with/without fixed point.

WAS 13 Figure 2

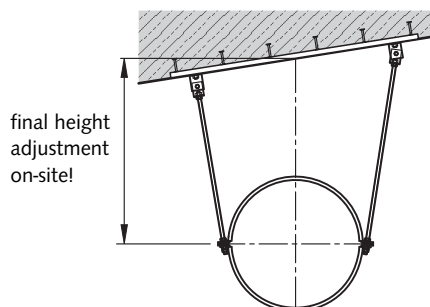

Specification text:

HALFEN Pipe fastener according to WAS 13.
Supply and install _____ piece(s) HALFEN Pipe fastener according to WAS 13, material stainless steel W 1.4571/ 1.4401 (A4) for DN ____.


HALFEN FLEXIBLE FRAMING CONSTRUCTIONS

Specification Texts

1. HALFEN Pipe clamp suspension

Type Beta, zinc plated for pipe DN___ Da___


Supply and install ___ piece(s) HALFEN Pipe clamp suspension, consisting of pipe clamp type Beta ___, in finish ___, with installation rubber - or - without installation rubber and threaded rod M12, L = 1000 mm with hexagonal rod coupler SKM M12, with T-head bolts for fixing on pre-installed HALFEN Channel ___/___ or for fixing with dowel.



2. HALFEN Pipe clamp suspension

Type Delta, zinc coated for pipe DN___ Da___


Supply and install ___ piece(s) HALFEN Pipe clamp suspension, consisting of pipe clamp type Delta ___, in finish ___, with installation rubber - or - without installation rubber and threaded rod M16, L = 1000 mm with hexagonal rod coupler SKM M16, with T-head bolts for fixing on pre-installed HALFEN Channel ___/___ or for fixing with dowel.



3. HALFEN Pipe clamp fixing

System HCS RAD for Rohr DN___ Da___


Supply and install ___ piece(s) HALFEN Pipe clamp suspension type Alpha HCS - RAD ___, in finish ___, with installation rubber and pipe rest - or - without installation rubber with/or without pipe rest incl. T-head bolts for fixing of pipes to HALFEN Channels ___/___.



4. HALFEN Pipe support

Pipe support HRG for Pipe DN___ Da___


Supply and install ___ piece(s) HALFEN Pipe support HRG ___, in finish ___, as fixed support for assembly using T-head bolts or as a floating support with lift-off safety device and T-head bolts, appropriate for the anticipated forces.



5. HALFEN Lift off safety device


Lift off safety device AHS

Supply and install ___ piece(s) HALFEN Lift-off safety device type AHS ___, finish ___, as guides for pipe T-supports type HRG ___.



6. HALFEN Cantilever

Supply and install ___ piece(s) HALFEN Cantilever type KON ___, for fixing pipes or other components.



CONTACT HALFEN WORLDWIDE

HALFEN is represented by subsidiaries in the following countries, please contact us!

Austria	HALFEN Gesellschaft m.b.H. Leonard-Bernstein-Str. 10 1220 Wien	Phone: +43-1-259 6770 E-Mail: office@halfen.at Internet: www.halfen.at	Fax: +43-1-259-677099
Belgium / Luxembourg	HALFEN N.V. Borkelstraat 131 2900 Schoten	Phone: +32-3-658 07 20 E-Mail: info@halfen.be Internet: www.halfen.be	Fax: +32-3-658 15 33
China	HALFEN Construction Accessories Distribution Co.Ltd. Room 601 Tower D, Vantone Centre No. A6 Chao Yang Men Wai Street Chaoyang District Beijing · P.R. China 100020	Phone: +86-10 5907 3200 E-Mail: info@halfen.cn Internet: www.halfen.cn	Fax: +86-10 5907 3218
Czech Republic	HALFEN s.r.o. Business Center Šafránková Šafránková 1238/1 155 00 Praha 5	Phone: +420-311-690 060 E-Mail: info@halfen.cz Internet: www.halfen.cz	Fax: +420-235-314 308
France	HALFEN S.A.S. 18, rue Goubet 75019 Paris	Phone: +33-1-445231 00 E-Mail: halfen@halfen.fr Internet: www.halfen.fr	Fax: +33-1-445231 52
Germany	HALFEN Vertriebsgesellschaft mbH Liebigstr. 14 40764 Langenfeld	Phone: +49-2173-970-0 E-Mail: info@halfen.de Internet: www.halfen.de	Fax: +49-2173-970 225
Italy	HALFEN S.r.l. Soc. Unipersonale Via F.lli Bronzetti N° 28 24124 Bergamo	Phone: +39-035-0760711 E-Mail: tecnico@halfen.it Internet: www.halfen.it	Fax: +39-035-0760799
Netherlands	HALFEN b.v. Oostermaat 3 7623 CS Borne	Phone: +31-74-267 14 49 E-Mail: info@halfen.nl Internet: www.halfen.nl	Fax: +31-74-267 26 59
Norway	HALFEN AS Postboks 2080 4095 Stavanger	Phone: +47-51 82 34 00 E-Mail: post@halfen.no Internet: www.halfen.no	Fax: +47-51 82 34 01
Poland	HALFEN Sp. z o.o. Ul. Obornicka 287 60-691 Poznan	Phone: +48-61-622 14 14 E-Mail: info@halfen.pl Internet: www.halfen.pl	Fax: +48-61-622 14 15
Spain	HALFEN Spain PLAKABETON S.L. Polígono Industrial Santa Ana c/ Ignacio Zuloaga 20 28522 Rivas-Vaciamadrid	Phone: +34 916 669 181 E-Mail: info@halfen.es Internet: www.halfen.es	Fax: +34 916 669 661
Sweden	Halfen AB Vädursgatan 5 412 50 Göteborg	Phone: +46-31-98 58 00 E-Mail: info@halfen.se Internet: www.halfen.se	Fax: +46-31-98 58 01
Switzerland	HALFEN Swiss AG Hertistrasse 25 8304 Wallisellen	Phone: +41-44-849 78 78 E-Mail: info@halfen.ch Internet: www.halfen.ch	Fax: +41-44-849 78 79
United Kingdom / Ireland	HALFEN Ltd. A1/A2 Portland Close Houghton Regis LU5 5AW	Phone: +44-1582-47 03 00 E-Mail: info@halfen.co.uk Internet: www.halfen.co.uk	Fax: +44-1582-47 03 04
United States of America	HALFEN USA Inc. PO Box 18687 San Antonio TX 78218	Phone: +1 800.423.91 40 E-Mail: info@halfenusa.com Internet: www.halfenusa.com	Fax: +1 877.683.4910
For countries not listed HALFEN International	HALFEN International GmbH Liebigstr. 14 40764 Langenfeld / Germany	Phone: +49-2173-970-0 E-Mail: info@halfen.com Internet: www.halfen.com	Fax: +49-2173-970-849

HALFEN is represented with sales offices and distributors worldwide. Please contact us: www.halfen.com

NOTES REGARDING THIS CATALOGUE

Technical and design changes reserved. The information in this publication is based on state-of-the-art technology at the time of publication. We reserve the right to make technical and design changes at any time. HALFEN GmbH shall not accept liability for the accuracy of the information in this publication or for any printing errors.

The HALFEN GmbH subsidiaries in Germany, France, the Netherlands, Austria, Poland, Switzerland and the Czech Republic are Quality Management certified according to **ISO 9001:2015**, Certificate no. 202384-2016-AQ-GER-DAKKS.

