

# SECUWALK

## Walkway Mat

**SECUWALK is a UV stable PVC based walkway mat.**

### Benefits:

- Quick and easy installation
- No need to pierce the membrane
- Clearly differentiate the safe walking area
- Non-Slip Surface
- Cost effective
- UV- Resistant

### TECHNICAL DATA


INTERNAL / SHELTERED WAKWAYS			EXTERNAL / UN-SHELTERED WAKWAYS	
Roll Sizes	Weight		Tile Size	
Length:	9.2m	6.4 kg/m <sup>2</sup>	Length:	1.18m
Widths:	1.18m	69.50 kg/roll	Widths:	0.655m
Or:	0.59m	34.75 kg/roll	Thickness:	11 mm
Thickness:	11 mm		Colour:	Green
Colour:	Green		Installation:	- 4 SECUTABS per tile
Installation:	10 SECUTABS required per roll			- 100mm gap between tiles
				-must be laid rough side down



ICB (Waterproofing) Ltd  
Units 9-11 Fleets Industrial Estate,  
Willis Way,  
Poole,  
BH15 3SU

Tel: 01202 785200  
Fax: 01202 785201

Email: [info@icb.uk.com](mailto:info@icb.uk.com)

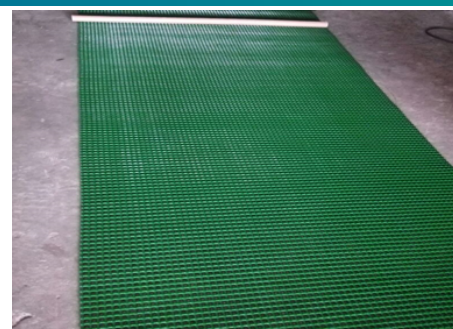

### Instructions for use:

- Installation is carried out simply by rolling out the mat and securing with SECUTABS at each end and approximately 2 metre centres either side, so 10 tabs to a roll.
- SECUTABS are preformed membrane tabs which are hot air or solvent welded to the field sheet, looped through the open lattice of the walkway mat, and then welded back onto itself.
- The mat should be laid rough side down as this will allow better flow of rainwater beneath the mat.
- If even better grip is desirable the mat can be laid smooth side down, but it will restrict the flow of rainwater if not laid in line with the falls of the roof.