

SUCCESSFUL PRESENCE IN OVER 50 COUNTRIES WORLDWIDE



[www.marispolymers.com](http://www.marispolymers.com)



ICB (International Construction Bureau) Ltd  
Unit 9-II Fleets Industrial Estate, Willis Way  
Poole, BH15 3SU  
Tel: 01202 785200 Fax: 01202 785201  
[www.icb.uk.com](http://www.icb.uk.com)



MARIS POLYMERS SA  
INDUSTRIAL AREA OF INOFYTA  
GR-32011 INOFYTA, GREECE  
TEL.: +30 22620 32918-9, FAX: +30 22620 32040  
e-mail: [info@marispolymers.gr](mailto:info@marispolymers.gr)

MARIS POLYMERS FRANCE  
ZI de Villemilan  
26 Avenue Ampère 91320  
WISSOUS France  
Tél: +33.(0).164.478.700, Fax: +33.(0).164.478.702  
e-mail: [info@resines.eu](mailto:info@resines.eu)

MARIS POLYMERS ASIA Pte Ltd  
18 Sin Ming Lane  
07-24 Midview City  
Singapore 573970  
Tel: +65 67463528, Fax: +65 67463529  
e-mail: [lancekhoo@marispolymers.gr](mailto:lancekhoo@marispolymers.gr)

MARIS POLYMERS SPAIN, S.L.U.  
P.I. Mas Gali - Pirineus, 18  
08503-Gurb(Bcn)  
Spain  
Tel.: +34 938869481, Fax: +34 938869482  
e-mail: [maris@marispolymerspains.com](mailto:maris@marispolymerspains.com)

## POLYURETHANE WATERPROOFING SYSTEMS




# The premium liquid waterproofing membrane system

## **MARISEAL**•**SYSTEM**

The **MARISEAL SYSTEM**® is a liquid-applied waterproofing system, based on pure high-quality Polyurethane resins. When the **MARISEAL SYSTEM**® is applied, a seamless membrane is created on the roof, balcony, terrace, wet-area or deck that protects the building structure reliably and on a long term basis, even under the most difficult conditions.

### advantages

- Simple application
- Dense crosslinking during curing.
- Forms a seamless membrane without joints or leak possibility
- Resistant to water
- Resistant to frost
- Resistant to high temperatures
- Crack-bridging
- UV-resistant
- Maintenance of its mechanical properties over a temperature span of -30 °C to +90 °C
- Provides water vapor permeability
- Provides full surface adhesion
- The waterproofed surface can be used for medium to heavy pedestrian traffic, depending on the chosen system
- Resistant to detergents, oils and common chemicals
- Easy and fast local repair if the membrane is damaged
- Decorative
- No need for open flames during application
- Low cost

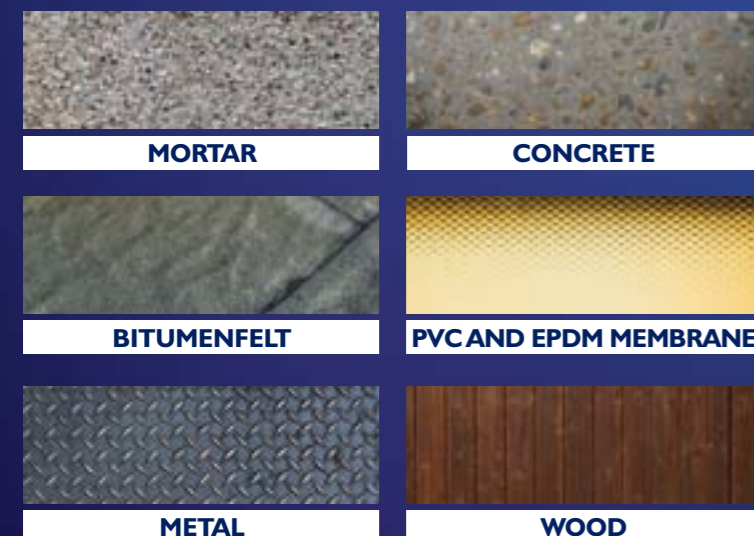

### uses

- Roofs, Balconies and Terraces
- Wet areas (under tile)
- Water tanks, Water Channels
- Roof Gardens, Flowerbeds
- Pedestrian Decks
- Vehicular Decks
- Foundations, Retaining Walls



**Maris Polymers**®  
POLYURETHANE SYSTEMS

Professional applicators in over

# 50

## COUNTRIES

use the **MARISEAL**•**SYSTEM** for demanding waterproofing



# Roof waterproofing

## MARISEAL•250®

**MARISEAL•250®** is a premium, one component permanent elastic, liquid-applied polyurethane coating that cures to a seamless, high elastic waterproofing membrane. It is used for long-lasting waterproofing.

Due to its high technology properties, this product solves waterproofing problems where other methods fail, such as stagnating water, frost, humidity, long term sun exposure, etc.



### advantages

- Simple application
- When applied, forms a seamless membrane, without joints or leak possibilities
- Certified for 25 years expected life span (EOTA, DIBt)
- Resistance to water
- Crack-bridging up to 2mm, even at -10 °C
- Maintainance of its mechanical properties, over a temperature span of -30 °C to +90 °C
- Provides water vapor permeability
- Provides full surface adhesion
- Provides sun reflectivity, contributing to thermoinsulation
- Provides anti-root properties
- The waterproofed surface can be used for medium to heavy pedestrian traffic, depending on the MARISEAL SYSTEM top-coat
- Resistant to detergents, oils and common chemicals
- Easy local repair; if the membrane is mechanically damaged
- Low cost

#### LEVELS OF USE CATEGORIES ACCORDING ETAG 005

Working Life:	W3	25 years
Climate zone:	M and S	North and South Europe
Imposed loads:	PI to P4	High pedestrian & vehicle traffic
Dachneigung:	SI bis S4	Roof slope from <5° to >30°
Lowest surface temperature:	TL4	-30 °C
Highest surface temperature:	TH4	+90 °C
Reaction to fire:	Class E	EN 13501, DIN 4102-I und -7
Resistant to wind loads:	>50 kPa	Resistant to all wind loads



### uses

- ✦ Roofs, Balconies, Terraces
- ✦ Pedestrian Decks, Plazas
- ✦ Vehicular Decks, Roof Car Parks
- ✦ Wet areas (bathrooms, kitchens, balconies)
- ✦ Planter boxes, Green roofs
- ✦ Protection over PUR-spray foam
- ✦ Concrete protection, Bridge-decks, etc.

### certifications

The **MARISEAL•250®** was tested by the German state testing institute for construction materials MPA-Braunschweig according the European Union Directive for liquid-applied roof waterproofing kits ETAG 005 and was found conforming.

The **MARISEAL•250®** was certified by the German state Institute for construction techniques DIBt-Berlin with the European Technical Approval (ETA) and with the CE-mark and certification.

The **MARISEAL•250®** was additionally tested and approved accordingly:

DIN 1928, which classifies it as a waterproofing coating.  
DIN 4102 part I, which classifies it as a B2 fire rating construction material.  
DIN 4102 part 7, which classifies it as a surface coating resistant to flying sparks and radiating heat.

The **MARISEAL•250®** has also been tested and certified in many countries around the world according to local and national regulations and norms.

# Wet Areas waterproofing (under tile)

## MARISEAL•270®

**MARISEAL•270®** is an elastic, single component, alkali resistant, liquid-applied polyurethane waterproofing membrane, used for long-lasting waterproofing of wet areas.

**MARISEAL•270®** when cured creates a highly elastic, 100% waterproofing membrane which offers long-term protection to underlying structures, even under the most difficult conditions.



### advantages

- Simple application (single component, ready to use)
- When applied forms a seamless membrane without joints or leak possibilities
- Resistant to water
- Maintains its mechanical properties over a temperature span of -30 °C to +90 °C
- Resistant to frost
- Alkali resistant
- Provides water vapor permeability
- Full surface adherence without any additional anchoring
- The waterproofed surface can be walked on
- Easy and fast local repair; if the membrane is mechanically damaged
- Low cost

### uses

Wet Areas waterproofing (under tile) in:

- ✦ Bathrooms
- ✦ Kitchens
- ✦ Balconies, etc

### certifications

It has been tested and certified by the PSB-laboratory in Singapore for its waterproofing, mechanical, elastic, water vapor permeability properties.



## Potable Water Tanks waterproofing

### **MARISEAL•300**

The **MARISEAL•300** is a liquid-applied, solvent-free, elastic, two component polyurethane membrane used for long-lasting waterproofing and protection of water tanks and reservoirs.

The **MARISEAL•300** is based on pure elastomeric hydrophobic polyurethane resins, which result when applied in a seamless, elastic membrane with excellent mechanical, chemical, thermal and natural element resistance properties.



#### advantages

- Certified for safe use in potable (drinking) water reservoirs
- When applied forms seamless membrane without joints or leak possibilities
- Resistant to water and water treatment chemicals
- Maintains its mechanical properties over a temperature span of -30 °C to +90 °C
- Remains elastic even at low (frost) temperature
- Full surface adherence
- Water vapor block
- Resistant to domestic sewage and common chemicals

#### uses

- Potable Water Tanks
- Water Channels
- Artificial Ponds
- Sewage Tanks

#### certifications

The **MARISEAL•300** is certified according the current European, German, British, Greek and Singaporean legislation for use on surfaces in direct contact with potable (drinking) water:

## Foundations & Retaining Walls waterproofing

### **MARISEAL•600**

The **MARISEAL•600** is a permanent elastic, liquid applied, two component, bitumen extended polyurethane waterproofing membrane used for long-lasting protection and waterproofing of foundations and retaining walls.

When applied it creates a seamless, highly elastic, waterproofing membrane without joints or leak possibilities.



#### advantages

- Easy application
- When applied forms a seamless membrane without joints or leak possibilities
- Resistant to stagnating water
- Provides vapor block properties
- Highly elastic
- If the membrane gets mechanically damaged, it can be easily repaired locally within minutes
- Resistant to water and frost
- Maintains its mechanical properties over a temperature span of -30 °C to +90 °C
- Low cost

#### uses

- Foundations
- Retaining Walls
- Concrete Structures
- Wet Areas (under tile)

#### certifications

It has been tested and certified by the PSB-laboratory in Singapore for its waterproofing, mechanical, elastic, water vapor block and other properties.

## Transparent Balcony / Terrace waterproofing (above tile)

### **MARITRANS**<sup>®</sup>

**MARITRANS**<sup>®</sup> is a premium, single component, transparent liquid-applied polyurethane waterproofing membrane.

When applied on balconies and terraces, it creates a seamless, transparent, pedestrian traffic resistant membrane, that protects underlying structures on a long-term basis.

This high technology transparent coating is UV-stable, non yellowing, non-chalking, alkali and chemical resistant. Even after years of use it remains transparent and elastic.



### advantages

- Simple application (single component, ready to use)
- UV-stable
- Non-yellowing, non-chalking
- When applied forms a seamless membrane without joints or leak possibilities
- Provides water vapor permeability
- Crack bridging
- Resistant to water
- Maintains its mechanical properties over a temperature span of -30 °C to +90 °C
- Resistant to frost
- Full surface adherence
- If the membrane gets mechanically damaged, it can be easily repaired locally within minutes.
- The waterproofed surface can be used for domestic pedestrian traffic

### uses

Transparent waterproofing of:

- ✦ Balconies and Terraces
- ✦ Glass / Glass-Brick walls
- ✦ Transparent Plastics (e.g. Polycarbonate)
- ✦ Ceramic surfaces
- ✦ Natural Stones
- ✦ Wood, etc

### certifications

**MARITRANS**<sup>®</sup> has been tested and certified by the German State Institute Materialprüfanstalt MPA-Braunschweig according mechanical, optical and UV resistance properties.



## Roof Details waterproofing

### **MARISEAL-DETAIL**<sup>®</sup>

**MARISEAL-DETAIL**<sup>®</sup> is a liquid-applied, thixotropic, permanent elastic, **fiber-reinforced**, one component polyurethane coating used for long-lasting waterproofing of complex roofing details and connections.

### uses


The **MARISEAL-DETAIL**<sup>®</sup> is mainly used to waterproof details like:

- ✦ Pipes
- ✦ Flashings and 90° angles
- ✦ Lightdomes
- ✦ Chimneys
- ✦ Photovoltaic systems
- ✦ Wall-floor connections
- ✦ Gutters, etc.



### certifications

The **MARISEAL-DETAIL**<sup>®</sup> was certified by the German State Institute for construction techniques DIBt-Berlin with the European Technical Approval (ETA) and with the CE-mark and certification.

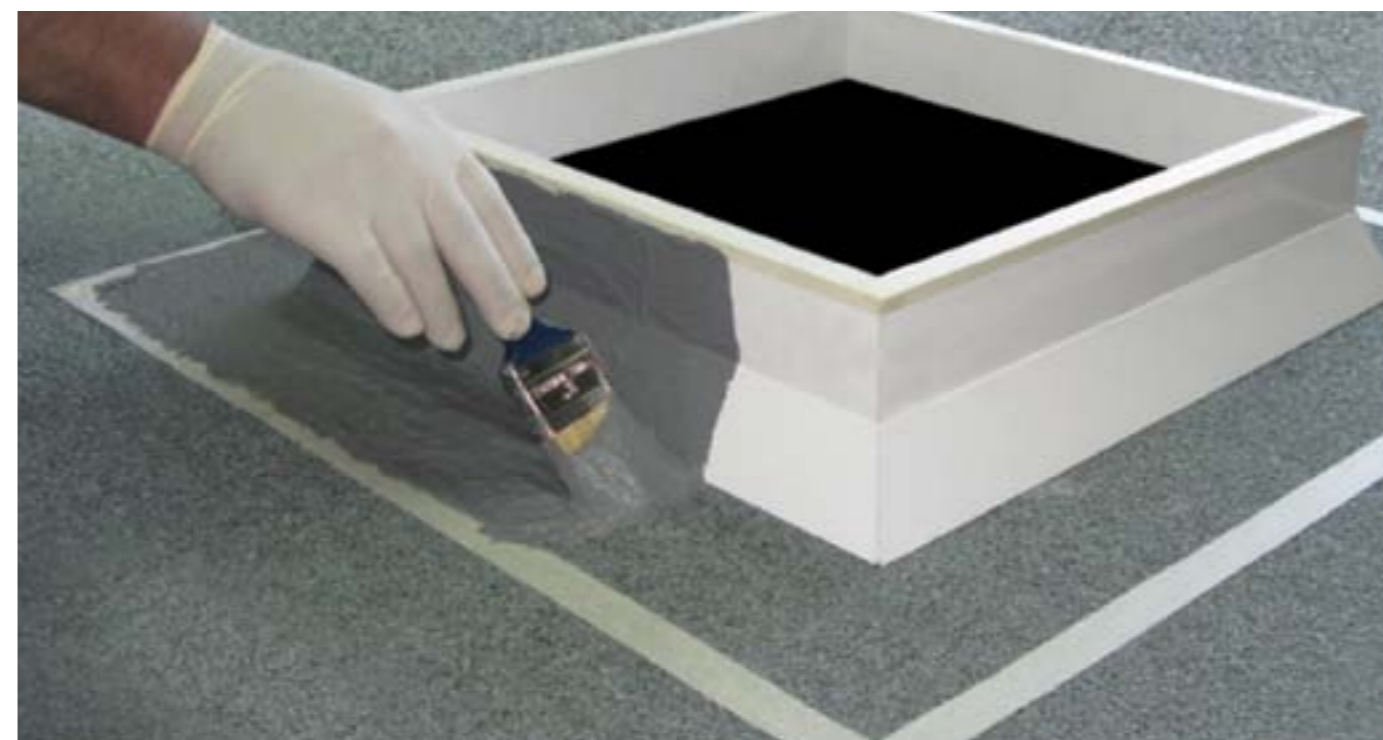

## Top Coat for Roofs, Balconies and Terraces

### MARISEAL•400®

The **MARISEAL•400** is an elastic, color and UV stable, aliphatic polyurethane top-coat that is applied over the MARISEAL SYSTEM waterproofing membrane, providing a resistant finish that can withstand domestic pedestrian traffic conditions.

The use of the **MARISEAL•400** results in a resistant, color stable and decorative, glossy and easy-to-clean surface which does not show any surface chalking effect.

The **MARISEAL•400** additionally prolongs the life span of the waterproofing membrane offering long-term protection, even under the most difficult conditions.



#### advantages

- Simple application (roller or airless spray)
- One component
- Increases the abrasion and wear resistance of the waterproofing membrane underneath
- UV stable
- Color stable
- Gives a glossy and easy-to-clean surface
- Does not show the chalking effect of aromatic polyurethane coatings
- Resistant to water, heat and frost
- Maintains its mechanical properties over a temperature span of -30 °C to +90 °C
- The waterproofed surface can be walked on (domestic pedestrian traffic)

#### uses

Used over the MARISEAL liquid-applied waterproofing membranes on surfaces, with domestic pedestrian traffic like:

- **Roofs**
- **Balconies**
- **Terraces**
- **Verandas, etc**

#### certifications

It has been tested and certified by the German State Institute Materialprüfanstalt MPA-Braunschweig, as a non-yellowing, color stable and non-chalking coating.

## Top Coat for Public Pedestrian Areas

### MARISEAL•420®

The **MARISEAL•420** is a hard-elastic, color and UV stable, aliphatic polyurethane top-coat that is applied over the MARISEAL SYSTEM waterproofing membrane, providing a wear resistant finish that can withstand heavy pedestrian and light vehicle traffic conditions.

The use of the **MARISEAL•420** results in an abrasion resistant, glossy and easy-to-clean surface which is color stable, UV-stable and free of chalking.

The **MARISEAL•420** additionally prolongs the life span of the waterproofing membrane offering long-term protection, even under the most difficult conditions.



#### advantages

- Simple application (roller or airless spray)
- One component
- Resistant to constant, heavy abrasion and wear conditions
- UV stable
- Color stable
- Gives a glossy and easy-to-clean surface
- Does not show the chalking effect of aromatic polyurethane waterproofing coatings
- Resistant to water, heat and frost
- Maintains its mechanical properties over a temperature span of -30 °C to +90 °C
- The waterproofed surface can be walked on (public pedestrian traffic).

#### uses

Used over the MARISEAL liquid-applied waterproofing membranes on surfaces, with public pedestrian traffic like:

- **Pedestrian Decks and Walkways**
- **Stadium Tribunes**
- **Plazas**
- **Exposed Car Parking areas**

## Water Repellent System

### **MARISEAL•800®**

The **MARISEAL•800®** is a transparent, deep-penetrating, non-filming, non-yellowing, single component siloxane/silane water repellent and chloride screen.

The **MARISEAL•800®** allows the surface to breathe, is UV-stable, and does not change the color or the appearance of the substrate. It creates a surface that does not absorb water and thus is protected from humidity and frost damages, stains and chloride -ions on a long term basis.



#### advantages

- Easy application
- Deep penetration
- Do not create a surface film
- Do not change the color or the appearance of the surface
- Give the surface a constant hydrophobic effect.
- Help stop the intrusion of water and waterborne chloride ion migration reducing surface corrosion
- Allow the surface to breathe
- Provide excellent alkaline resistance

#### uses

**MARISEAL•800®** is highly effective water repellent for:

- ✦ Natural Stones / Artificial Stones
- ✦ Decorative Bricks
- ✦ Limestones
- ✦ Concrete / Colored Concrete
- ✦ Mosaics



## Transparent Floor Sealer

### **MARISEAL•770®**

The **MARISEAL•770®** is a single component, semi-rigid, aliphatic polyurethane transparent film-forming sealer, with high mechanical and abrasion resistances. It is UV-stable, non-yellowing, and provides high levels of adhesion to the surface.

The **MARISEAL•770®** creates a surface that does not absorb water and liquid stains. It protects from mechanical wear, dust creation, dirt, stains, oils and chemicals.



#### advantages

- Easy application
- Deep penetration
- UV-stability
- Create dust proof surfaces
- Enhance the color of the surface
- Create a wet-look effect
- Provide excellent protection against liquid stains
- Provide excellent protection against mechanical wear
- Offer resistance to bacterial and fungus attack

#### uses

The **MARISEAL•770®** is highly effective transparent floor sealers for:

- ✦ Stamped Concrete
- ✦ Colored Concrete
- ✦ Natural Stones
- ✦ Decorative Bricks
- ✦ Absorbent Ceramics



# Protective Pool Coating

## MARIPOL®

The **MARIPOL®** is a premium, one component, protective coating that offers long-lasting protection for swimming pools, ponds and water tanks.

The **MARIPOL®** when applied, creates a semi-rigid, colored, UV-resistant, protective coating that offers protection, high resilience, high chemical resistance to various pool chemicals and high mechanical strength.

The **MARIPOL®** offers effective, long-term protection, even under the most demanding applications




### advantages

- Easy application (single component, ready to use)
- Fast application (quick drying)
- Resistant to pool chemicals
- Resistant to sun exposure
- Non chalking
- Resistant to stresses and friction
- Resilient to water
- Low cost

### uses

The **MARIPOL®** coating system can be used in:

- ✦ Swimming Pools
- ✦ Water Fountains
- ✦ Artificial Lakes and Ponds
- ✦ Water tanks

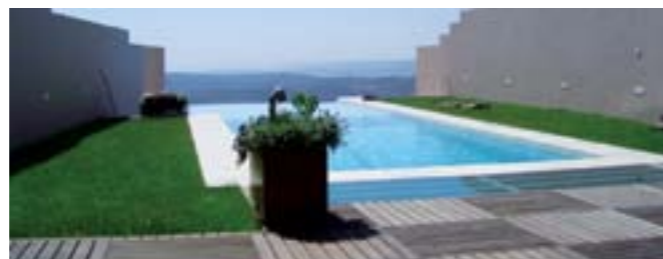

# Floor Coating

## MARIPUR•SYSTEM®

The **MARIPUR•SYSTEM®** is a technologically advanced, premium, one component polyurethane floor coating system that offers easy application, high durability, quick curing times and most importantly guaranteed long lasting results.



### advantages

- Simple application (roller or airless spray)
- One component
- High abrasion resistant
- Resistant to constant, heavy abrasion and wear conditions
- Heat and frost resistant
- Does not absorb liquids or dirt
- Stops the creation of dust
- Decorative
- Give a glossy and easy-to-clean surface
- Chemical resistant
- Maintains its mechanical properties over a temperature span of -20 °C to +90 °C
- Low cost

### uses

The **MARIPUR•SYSTEM®** is mainly used on concrete floors, for interior and exterior surfaces.

- ✦ Car parking areas
- ✦ Warehouses
- ✦ Storage areas
- ✦ Production areas
- ✦ Show rooms
- ✦ Pedestrian decks
- ✦ Cold storage rooms (Freezers), etc.