


Med0

DM12 Drainage Board

Product Data Sheet

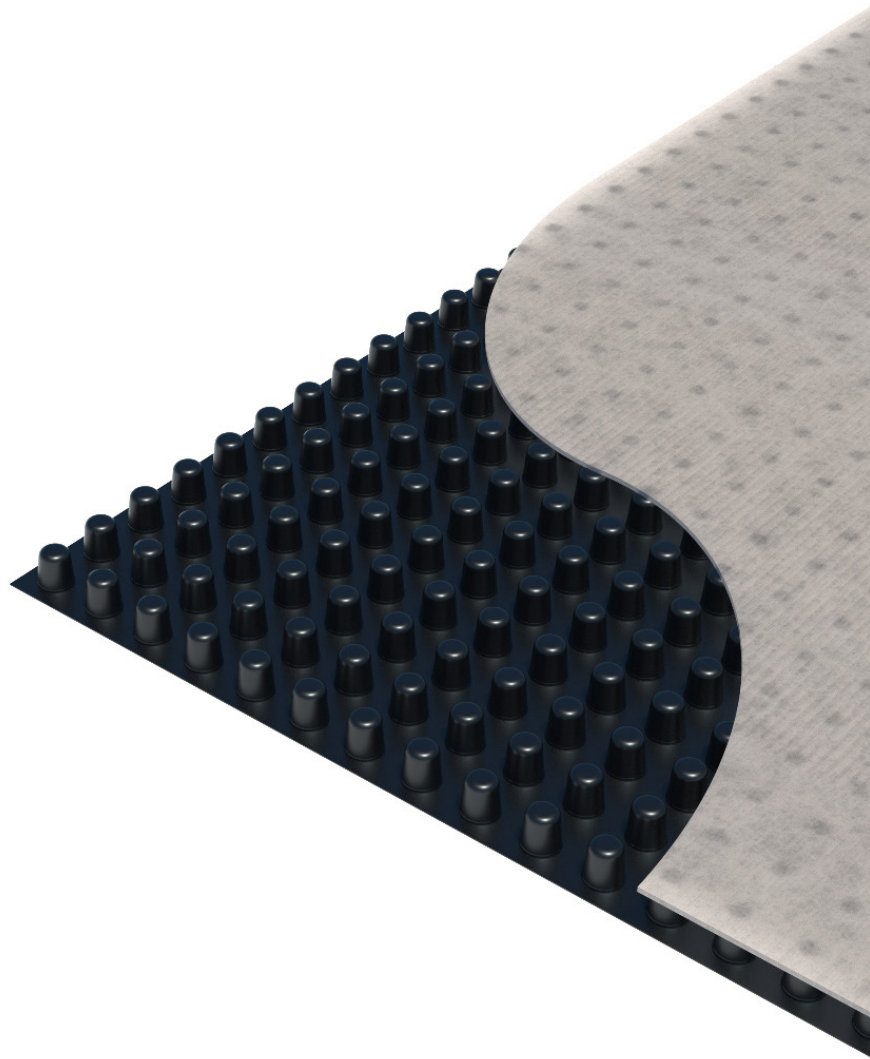

Product Data Sheet

General Information

Radmat DM12 is a drainage element for use beneath bedded paving or a cast concrete slab installed above waterproofing or ProTherm Min K layer in inverted roofing. Consisting of a non woven needle punched geotextile filter layer thermally bonded to one side of a 12mm deep HDPE (High Density Polyethylene) cusped core DM12 is effectively impermeable one side. The textile filter has a flap extending beyond the core on one edge.

Installation instructions

Unroll over waterproofing membrane or protection fleece butting side laps and end laps.

Delivery conditions

Delivery Form

Sheet

Storage and transport

Delivered flat on a pallet.

Store flat.

| PRODUCT DIMENSIONS | | |
|--------------------|-------------|------|
| Subject | Performance | Unit |
| Length | 50 or 25 | m |
| Width | 1.1 or 2.2 | m |

| DECLARED PERFORMANCE | | | | |
|---|-------------|--------|---------------------|---------------|
| Essential characteristics | Performance | | Units | Test method |
| Thickness at 2kPa | 1.2 | -10% | (mm) | EN ISO 9863-1 |
| Tensile strength MD/CD | 9.5/9.5 | -15% | (kN/m) | EN ISO 10319 |
| Elongation | 50/50 | ±30% | (%) | EN ISO 10319 |
| Pore size O_{90} | ±30% | - | (micron) 115 | EN ISO 12956 |
| Static puncture resist CBR | 1600 | -15% | (N) | EN ISO 12236 |
| Dynamic perf. cone drop | 32 | +25% | (mm) | EN ISO 13433 |
| Carbon black content | 0.8-2.5 | - | (%) | ASTM D1603 |
| Thickness at 2kPa | 12.0 | ±10% | (mm) | EN ISO 9863-1 |
| Mass per unit area | 970 | approx | (g/m ²) | EN ISO 9864 |
| Usable tensile strength MD/CD (kN/m) | ±10% | - | 17/11 | EN ISO 10319 |
| Minimum ultimate compressive strength | 700 | - | kPa | EN ISO 10319 |
| Long term compressive strength | 250 | - | kPa | EN ISO 10319 |
| Long term loading strength (100+ years) | 200 | - | kPa | ASTM D7361-07 |
| Elongation MD/CD | 45 / 30 | ±10% | (%) | EN ISO 10319 |
| CBR puncture resistance | 2300 | -20% | (N) | EN ISO 12236 |

This information given in good faith and is based on the latest knowledge available to Radmat Building products Ltd. Whilst every effort has been made to ensure that the contents of the publication are current while going to press, customers are advised that products, techniques and codes of practice are under constant review and liable to change without notice.

For further information on Radmat products and services please call **01858 410372**, email tech enquiries@radmat.com or visit our website www.radmat.com

Product Data Sheet

| PERPENDICULAR WATER INFLOW (dimpled side only) | | | | | | |
|--|----------------------------|---------------------|----------|--------------------------|----------------------------------|------------------------------|
| Essential characteristics | Performance | | | | Units | Test method |
| Water flow at 50mm head At 2kPa permeability (coeff) | 95 2.5×10^{-3} | - | - | $\pm 30\%$ $\pm 30\%$ | (l/m ² .s) (m/s) - | EN ISO 11058 EN ISO 11058 |
| Breakthrough head | 0 | - | - | - | l/m. sec | BS 6906 pt 3 |
| In-plane water-flow | HG = 1.0 | - | HG = 0.1 | - | - | Hydraulic gradient |
| MD/CD | | | | | | |
| - at 20kPa pressure | 4.25 | ± 0.25 | 1.25 | ± 0.12 | (l/m. sec) | EN ISO 12958 |
| - at 100kPa pressure | 3.50 | $\pm 0.25 \pm 0.25$ | 1.00 | ± 0.12 | (l/m. sec) | EN ISO 12958 |
| - at 200kPa pressure | 2.50 | | 0.65 | ± 0.12 | (l/m. sec) | EN ISO 12958 |

NOTES

- The geotextile is bonded to the core to minimise intrusion into and blockage of the drainage passage under the action of pressure of backfill material.
- The values given are indicative and correspond to nominal results obtained in our laboratories and testing institutes. In line with our policy of continuous improvement the right is reserved to make changes without notice at any time.
- Unless otherwise stated allowable tolerances are $\pm 10\%$ of the typical value. The tolerance on roll length is 1.5% and on roll width 1.0%
- Due to the range of products, interfaces with other products and loading conditions, only selected testing has been done on creep and protection efficiency. Radmat will be pleased to discuss available test data and arrange testing if appropriate.
- Final determination of the suitability of any information is the sole responsibility of the user. Radmat will be pleased to discuss the use of this or any other product but responsibility for selection of a material and its application in any specific project remains with the user.

This information given in good faith and is based on the latest knowledge available to Radmat Building products Ltd. Whilst every effort has been made to ensure that the contents of the publication are current while going to press, customers are advised that products, techniques and codes of practice are under constant review and liable to change without notice.

For further information on Radmat products and services please call **01858 410372**, email tech enquiries@radmat.com or visit our website www.radmat.com

Radmat Building Products Ltd

Holland House, Valley Way, Rockingham Road
Market Harborough, Leicestershire, LE16 7PS
T : 01858 410 372 E : tech enquiries@radmat.com