HIGH PERFORMANCE ANTISLIP ANTIWEAR CAST METAL INSERT BAR

Item: AATiTM type ASB38P[®] + ASB50[®]Insert Bars with silicon carbide granules cast into the metal matrix of the wearing surface.


Application: Specially designed for use where a complete nosing profile is considered unnecessary but where high antislip performance and wear resistance are required at the front edge of the step. Also for use as an antislip insert bar on other flat or sloping surfaces. The bars are installed so that the top face sits 1.5mm - 2mm above the surrounding surface.


Materials: Nickel Bronze, Gunmetal, Aluminium & Cast Iron.



Specialists in pedestrian surfaces

DATA SHEET: ASB SERIES®	
DATE: Oct 2013	ISSUE: 2
ITEM: Insert Bar	



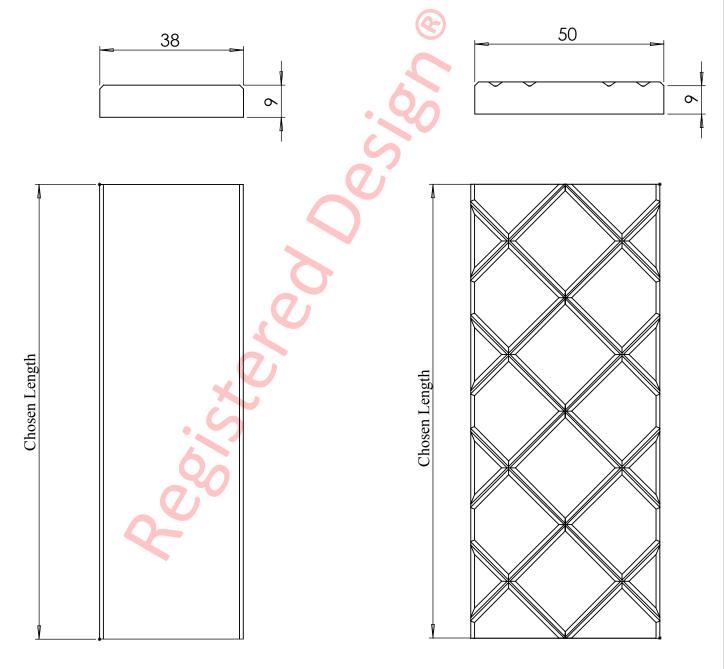

Special attention should be given to installation & drainage of this product. For further advice please speak to a member of AATi's technical department. Dimensions shown are nominal and subject to AATi manufacturing tolerances.