



PROFESSIONAL PRODUCT GUIDE





We promise our paint will give you the perfect colour with a uniform finish and the coverage stated, or we'll replace it.*



Perfect Colour

We recognise that choosing the perfect colour isn't always easy. In the unlikely event that you don't love the final colour, we will replace it under the **Dulux Promise**.



Uniform Finish

When you paint a wall, you want a good finish. Our paints will give you an even **uniform finish** without patchiness.



Coverage Stated

You can be confident in the covering power of our paints. Our paint will give the **coverage stated** in our product information.

For further information visit:

duluxtrade.co.uk/promise

*Terms and conditions apply. Claims must be made within 6 months of purchase. Proof of purchase required. Colour claims limited to 10L per-customer. Manufacturer's tips and instructions must have been followed. UK purchases only.

PRODUCT AREAS

Walls and Ceilings

6

Trim Products

16

Exterior Products

26

Specialist Products

38

Woodcare

52

Primers

66

Pre-decorative

78

ADDITIONAL INFORMATION

Services

89

Quick Reference Guide

92

SYMBOLS EXPLAINED



Roller



Tube



Cartridge



Conventional Spray



Knife



Skimming Knife



Brush



Airless Spray



Aerosol



Recently Updated Product



New Product



Light & Space

PLEASE NOTE: All quoted touch dry times and recoat times are dependent upon temperature and humidity. Exterior masonry paint coverage figures are only an approximate guide due to the variation of different building surfaces and may be reduced.

WE ARE COMMITTED TO DOING MORE WITH LESS

Dulux Trade believe that a brighter future is possible for our planet if we work to deliver more value from fewer resources.

At **Dulux Trade** we offer solutions that deliver positive sustainability benefits, as well as reducing our products' environmental impact.

We're working to make longer lasting, lower maintenance finishes so that less paint is needed, and we offer water-based alternatives to traditional solvent-based products – making a positive change to how paints impact indoor air quality and the wellbeing of building users.

To find out more check out
duluxtrade.co.uk/sustainability



“As a brand leader we have a critical role to play in reducing the environmental footprint associated with the use of our products and delivering innovations that allow our customers to achieve their sustainability goals.”

Duncan Lochhead
Commercial Sustainability Manager,
AkzoNobel Decorative Paints UK & Ireland

LET'S COLOUR

Part of the **Dulux** vision is to make people's lives brighter and more colourful. For 25 years, **Dulux** has sponsored **Community RePaint** - a network that collects leftover paint and passes it on to benefit individuals, families, communities and charities in need at an affordable cost.

Through partnerships with organisations such as **The Outward Bound Trust**, **Dulux** also aims to make a positive difference to disadvantaged young people who are in need of help to improve their life chances.

Dulux
ACADEMY



Lift the lid on your potential

Whether you're starting out in your career or a time served decorator you'll benefit from:

- Over 50 courses across all areas of decorating
- Learning from industry experts
- Exclusive level 3 City & Guilds Qualification
- Access to a post-course members only forum
- Opportunities delivered across a network of UK venues
- Access to tools and equipment from industry leading supplier partners
- CiTB funding on selected courses



Download our Course Prospectus to see our full range of courses. Course dates, venues, prices and availability can be viewed and booked online.

Find out more at www.duluxacademy.co.uk

WALLS AND CEILINGS

Dulux Trade decorative finishes offer the highest quality products delivering a variety of best in class properties, such as **durability**, **coverage** or **spreading rate**, to assist you in your internal decoration projects.



WALLS AND CEILINGS

WALL & CEILING PRODUCTS	PLACE OF APPLICATION – INTERIOR SURFACES												RECOATABLE	WATER/ SOLVENT-BASED
	General use	High traffic areas	Plaster Board		Plaster		Woodchip		Blown vinyl wall coverings		Masonry			
			Old	New	Dry	Not fully dry	Old	New	Old	New	Old (Primed & Sealed)	New		
Diamond Matt	●	●	●	●	●		●	●			●		4-6 hours	Water-based
Diamond Matt Light & Space	●	●	●	●	●		●	●			●		4-6 hours	Water-based
Diamond Eggshell	●	●	●	●	●		●	●			●		4-6 hours	Water-based
Durable Flat Matt	●		●	●	●		●	●	●	●	●		2-4 hours	Water-based
Dulux Trade Evolve Matt	●		●	●	●		●	●	●	●	●		2-4 hours	Water-based
Vinyl Matt	●		●	●	●		●	●	●	●	●		2-4 hours	Water-based
Vinyl Silk	●		●	●	●		●	●	●	●	●		2-4 hours	Water-based
Vinyl Soft Sheen	●		●	●	●		●	●	●	●	●		2-4 hours	Water-based
Ultra Matt			●	●	●		●	●	●	●	●		4 hours	Water-based
Supermatt				●	●	●		●		●		●	2-4 hours	Water-based
Fast Matt			●	●	●		●	●	●	●	●	●	2-4 hours	Water-based
Colour Sampler	●		●	●	●		●	●	●	●	●		2-4 hours	Water-based



“The Dulux Trade range of paints has something for everyone. One of my favourites is Diamond Matt, it’s the best by far. Diamond by name, Diamond quality when applying and when completed.”

Nick Dodge
Dulux Select Decorator Of The Year 2018 - Category Winner



WALLS AND CEILINGS

Dulux Trade Diamond Matt

WATER-BASED
DATA SHEET 447

A tough, cleanable emulsion with a smooth, even matt finish that protects against **scrubs, scuffs and stains** for **ultimate durability**.



Contains Anti-Fade Technology to protect colour pigments from damage for truly long lasting colour.

Durability

BENEFITS	Ultimate durability, scrub, scuff and stain resistant technology, smooth even finish. Tinting Bases and Magnolia also contain Anti-fade technology for truly long lasting colour
Colour range	PBW, Magnolia and over 11,500 colours*, including Colour Palette, NCS2 and BS colours.
Pack sizes	2.5L, 5L, 10L**
Touch dry	Dependent on temperature and humidity
Recoatable	4-6 hours
Coverage	Up to 16m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

Airless spray application: Thinning is not usually required. **Conventional spray application:** Add up to 1 part clean water to 5 parts paint. **Sealing new or bare surfaces:** Add up to 1 part clean water to 10 parts paint.

- Achieves Class 1 ISO 11998 and Type C BS 7719 scrub ratings
- Repeatedly cleanable • Ideal for use in high traffic areas

*For availability in very deep colours, please contact the **Dulux Trade** Technical Advice Centre.
**10L available in white and light base.

Dulux Trade Diamond Matt Light & Space

WATER-BASED
DATA SHEET 524

A tough, cleanable emulsion with a light reflective matt finish that protects against **scrubs, scuffs and stains** for **ultimate durability**.



Durability

BENEFITS	Lumitec technology, superior durability, scrub, scuff and stain resistant technology, matt finish
Colour range	Absolute White and the full Light & Space colour range*
Pack sizes	5L
Touch dry	Dependent on temperature and humidity
Recoatable	4-6 hours
Coverage	Up to 16m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

Airless spray application: Thinning is not usually required. **Conventional spray application:** Add up to 1 part clean water to 5 parts paint. **Sealing new or bare surfaces:** Add up to 1 part clean water to 10 parts paint.

- Reflects up to twice as much light
- Ideal for smaller rooms or rooms with limited natural light

* See back page for details

Dulux Trade Diamond Eggshell

WATER-BASED
DATA SHEET 408/537

A tough, cleanable emulsion with a smooth, even eggshell finish that protects against **scrubs, scuffs and stains** for **ultimate durability**.



Contains Anti-Fade Technology to protect colour pigments from damage for truly long lasting colour.

Durability

BENEFITS	Ultimate durability, scrub, scuff and stain resistant technology, smooth even finish. Tinting Bases and Magnolia also contain Anti-fade technology for truly long lasting colour
Colour range	PBW, Magnolia** and over 14,000 colours, including Colour Palette, NCS2 and BS colours. Also available in the full Light & Space Colour range*
Pack sizes	1L, 2.5L, 5L
Touch dry	Dependent on temperature and humidity
Recoatable	4-6 hours
Coverage	Up to 16m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

- Achieves Class 1 ISO 11998 and Type C BS 7719 scrub ratings
- Repeatedly cleanable • Ideal for use in high traffic areas
- Perfect for kitchens and bathrooms

* See back page for details ** 5L only

Dulux Trade Durable Flat Matt

WATER-BASED
DATA SHEET 440

A contemporary flat matt finish with good durability and opacity, for use on **walls and ceilings**



Durability

BENEFITS	Excellent durability. Flat matt finish. High opacity
Colour range	White and over 14,000 colours, including Colour Palette, NCS2 and BS colours
Pack sizes	2.5L, 5L
Touch dry	Dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 17m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

Airless spray application/Sealing new or bare surfaces: Add up to 1 part clean water to 5 parts paint. **Conventional spray application:** Add up to 1 part clean water to 2.5 parts paint.

- Ideal for period and contemporary properties
- Perfect at hiding imperfections and uneven wall surfaces

WALLS AND CEILINGS

Dulux Trade Evolve Matt

WATER-BASED
DATA SHEET 1011

A matt emulsion paint for use on interior walls and ceilings



Lower Embodied Carbon



BENEFITS	High quality finish, made from 35% recycled paint
Colour range	White
Pack sizes	5L
Touch dry	Dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 17m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

Airless spray application/Sealing new or bare surfaces:

Add up to 1 part clean water to 5 parts paint

Conventional spray application: Add up to 1 part clean water to 2.5 parts paint

- Ideal for use on woodchip, dry plaster and a range of building boards
- Reduced VOC content
- Reduced carbon footprint by 11%

Dulux Trade Vinyl Silk

WATER-BASED
DATA SHEET 414

A silk emulsion paint for use on interior walls and ceilings



BENEFITS	Tough, washable finish. High opacity. Coverage up to 16m ² per litre, water-based
Colour range	PBW, White, Magnolia and over 14,000 colours, including Colour Palette, NCS2 and BS colours
Pack sizes	2.5L, 5L, 10L
Touch dry	Dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 16m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

Airless spray application: Thinning not required.

Conventional spray application/Sealing new or bare surfaces: Add up to 1 part clean water to 5 parts paint.

- Enhances low relief wall coverings and textured plaster
- Not suitable for areas subject to heavy condensation, such as kitchens and bathrooms

Dulux Trade Vinyl Matt

WATER-BASED
DATA SHEET 411/536

A matt emulsion paint for use on interior walls and ceilings



BENEFITS	Excellent application and finish, high opacity, coverage up to 17m ² per litre, water-based
Colour range	PBW, White, Magnolia, Black, Gardenia, over 14,000 colours, including Colour Palette, NCS2 and BS colours. Also available in the full Light & Space colour range two*
Pack sizes	1L**, 2.5L, 5L, 10L
Touch dry	Dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 17m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

Airless spray application/Sealing new or bare surfaces: Add up to 1 part clean water to 5 parts paint **Conventional spray application:** Add up to 1 part clean water to 2.5 parts paint

- Ideal for use on woodchip, dry plaster and a range of building boards

* See back page for details. ** Tinted base only.

Dulux Trade Vinyl Soft Sheen

WATER-BASED
DATA SHEET 413

A mid-sheen emulsion paint for use on interior walls and ceilings



BENEFITS	Tough, washable finish. Fashionable mid-sheen finish. Coverage up to 16m ² per litre, water-based
Colour range	PBW, Magnolia and over 14,000 colours, including Colour Palette, NCS2 and BS colours
Pack sizes	1L*, 2.5L, 5L
Touch dry	Dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 16m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

Airless spray application: Thinning not required. **Conventional spray application/Sealing new or bare surfaces:** Add up to 1 part clean water to 5 parts paint.

- Ideal for use where a 'Satin' finish is required
 - Not suitable for areas subject to heavy condensation, such as kitchens and bathrooms
- *Not all colours available in 1L.

WALLS AND CEILINGS

Dulux Trade Ultra Matt

WATER-BASED

DATA SHEET 549

A matt emulsion paint ideal for use on **ceilings**



BENEFITS	Non-reflective, ideal for ceilings in critical lighting, excellent touching-in properties, water-based
Colour range	White
Pack sizes	10L
Touch dry	Dependent on temperature and humidity
Recoatable	4 hours
Coverage	Up to 16m ² per litre
Thinning	Thinning not generally required. Please refer to data sheet for details

Conventional Spray: Satisfactory through most equipment.

Airless Spray: A typical set up for airless spray would be a minimum working pressure on paint of 138 bars (2000lb/sq in) with a spray tip size of 0.430.48mm (17-19 thou) and a spray tip angle of 40°.

- Specially formulated to provide a dead matt, non-reflective finish in all angles
- Ideal for hiding surface imperfections

Dulux Trade Supermatt

WATER-BASED

DATA SHEET 410

A matt emulsion paint for use on **interior walls** and **ceilings** that are not fully dry



BENEFITS	High opacity. Good coverage & application. Ideal for new plaster, water-based
Colour range	White, Magnolia and 150 tinted colours. Almond White and Gardenia are also available in ready mixed as 10L
Pack sizes	5L, 10L
Touch dry	Dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 18m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

Airless spray application: Add up to 1 part clean water to 5 parts paint

Conventional spray application: Add up to 1 part clean water to 2.5 parts paint

Sealing new or bare surfaces: Add up to 1 part clean water to 3 parts paint

- Ideal for use on new or skimmed interior plaster and interior masonry surfaces

Dulux Trade Fast Matt

WATER-BASED

DATA SHEET 515

A ready-for-use flat matt emulsion that is ideal for use on **plasterboard**



BENEFITS	Ready for use. Easy application and low splatter. Suitable for dry lining, water-based
Colour range	White, Magnolia and over 70 tinted colours
Pack sizes	1L, 2.5L, 5L
Touch dry	Dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 17m ² per litre on sealed surfaces
Thinning	Thinning not generally required. Please refer to data sheet for details

Airless spray application/Sealing new or bare surfaces:

Add up to 1 part clean water to 5 parts paint

Conventional spray application: Add up to 1 part clean water to 2.5 parts paint

- Low sheen of product makes touch-in easy and gives an excellent finish

Dulux Trade Colour Sampler

WATER-BASED

Test your colour choice



BENEFITS	Test your colour choice where it matters, on the actual surface to be painted - before the decorating starts
Colour range	Over 14,000 colours, including Colour Palette, NCS2 and BS colours
Pack sizes	250ml
Touch dry	Dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	A 250ml can will cover up to 2m ²
Thinning	Thinning not required

- To optimise accuracy, some colours are not available due to tinter shot sizes - your merchant or TAC can advise and recommend a 1L if 250ml can in not available in your choice of colour.

TRIM PRODUCTS

Whether revitalising **interior trim** or painting from new, **Dulux Trade** offers the highest quality paints to assist you in achieving a **beautiful lasting finish**.



TRIM PRODUCTS

TRIM PRODUCTS	PLACE OF APPLICATION							RECOATABLE	WATER/ SOLVENT-BASED
	Interior Surfaces					Exterior Surfaces			
	Wood		Metal		Heated Surfaces (e.g. radiators)	Wood	Metal		
	General use	New	General use	New					
Diamond Satinwood	●	●	●	●	●			6 hours	Water-based
Quick Dry Satinwood	●	●	●	●	●			4-6 hours	Water-based
Quick Dry Gloss	●	●	●	●	●			4-6 hours	Water-based
Quick Dry Undercoat	●	●	●	●	●			4-6 hours	Water-based
Satinwood	●	●	●	●	●			16-24 hours	Solvent based
High Gloss	●	●	●	●	●	●	●	16-24 hours	Solvent based
Eggshell	●	●	●	●	●			16-24 hours	Solvent based
Undercoat	●	●	●	●	●	●	●	6-16 hours	Solvent based



“I tried it, I liked it, and now I use it. **Excellent finish by brush and spray application.**”

Steve Dove
Dulux Select Decorator



TRIM PRODUCTS

Dulux Trade Diamond Satinwood

WATER-BASED

DATA SHEET 1006

Superior quality with a **durable finish** for use on interior wood and metal



TIP

To get the best from Diamond Satinwood, lightly dampen a synthetic brush and the surface before application to increase the flow out.

Quick
Drying



BENEFITS	Tough, durable and non-yellowing, suitable for high traffic areas, stain and grease resistant
Colour range	PBW and more than 14,000 colours, including Colour Palette, NCS2 and BS colours
Pack sizes	1L, 2.5L, 5L
Touch dry	Dependent on temperature and humidity
Recoatable	6 hours
Coverage	Up to 12m ² per litre
Thinning	Thinning not generally required. Please refer to data sheet for details

- Will withstand repeated washing
- For best results use a good quality synthetic (nylon polyester) brush or a short pile synthetic/mohair roller designed for the application of water-based paints
- Can be used on heated surfaces, e.g. hot water pipes and radiators

Dulux Trade Quick Dry Satinwood

WATER-BASED

DATA SHEET 551

An **advanced** water-based, satin finish



TIP

To get the best from Quick Dry Satinwood, lightly dampen a synthetic brush and the surface before application to increase the flow out.

Quick
Drying



BENEFITS	Excellent satin finish. Advanced water-based technology. Tough, durable finish
Colour range	PBW and more than 14,000 colours, including Colour Palette, NCS2 and BS colours
Pack sizes	1L, 2.5L, 5L
Touch dry	Dependent on temperature and humidity
Recoatable	6 hours
Coverage	Up to 12m ² per litre
Thinning	Thinning not generally required. Please refer to data sheet for details

- A smooth, durable top coat for use on interior wood and metal
- For best results use a good quality synthetic (nylon polyester) brush or a short pile synthetic/mohair roller designed for the application of water-based paints
- Can be used on heated surfaces, e.g. hot water pipes and radiators

Dulux Trade Quick Dry Gloss

WATER-BASED

DATA SHEET 550

An **advanced** water-based, high gloss finish



TIP

To get the best from the Quick Dry system, lightly dampen a synthetic brush and the surface before application to increase the flow out.

Quick
Drying



BENEFITS	High gloss finish. Advanced water-based technology. Tough and durable
Colour range	PBW and more than 14,000 colours, including Colour Palette, NCS2 and BS colours
Pack sizes	1L, 2.5L, 5L
Touch dry	Dependent on temperature and humidity
Recoatable	6 hours
Coverage	Up to 12m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- A smooth, durable top coat for use on both interior wood and metal
- For best results use a good quality synthetic (nylon polyester) brush or a short pile synthetic/mohair roller designed for the application of water-based paints
- Can be used on heated surfaces, e.g. hot water pipes and radiators although this may increase the speed of yellowing

Dulux Trade Quick Dry Undercoat

WATER-BASED

DATA SHEET 552

The ideal foundation for **Dulux Trade Quick Dry Gloss**



TIP

To get the best from the Quick Dry system, lightly dampen a synthetic brush and the surface before application to increase the flow out.

Quick
Drying



BENEFITS	Excellent coverage. Advanced water-based technology. Perfect for Dulux Trade Quick Dry Gloss
Colour range	White and more than 14,000 colours including Colour Palette, NCS2 and BS colours*
Pack sizes	1L, 2.5L, 5L
Touch dry	Dependent on temperature and humidity
Recoatable	4-5 hours
Coverage	Up to 10m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- Can be used on all interior wood and metal
- Excellent opacity and coverage
- For best results use a good quality synthetic (nylon polyester) brush or a short pile synthetic/mohair roller designed for the application of water-based paints
- Can be used on heated surfaces, e.g. hot water pipes and radiators although this may increase the speed of yellowing

*Only available in bases.

TRIM PRODUCTS

Dulux Trade
Satinwood

SOLVENT-BASED
DATA SHEET 406

For use on **interior wood** and **metal**



TIP For long-lasting whiteness, we recommend the use of a water-based formulation such as Dulux Trade Quick Dry Satinwood.



BENEFITS	Tough, durable finish. Self undercoating. Dirt resistant**
Colour range	PBW and more than 14,000 colours, including Colour Palette, NCS2 and BS colours
Pack sizes	1L, 2.5L, 5L
Touch dry	After 4-6 hours
Recoatable	After 16-24 hours
Coverage	Up to 17m ² per litre on sealed surfaces
Thinning	Thinning not generally required. Please refer to data sheet for details

- Will withstand repeated washing
- For best results use a good quality synthetic (nylon polyester) brush or a short pile synthetic/mohair roller designed for the application of water-based paints
- Can be used on heated surfaces, e.g. hot water pipes and radiators although this may increase the speed of yellowing

**Whilst leading-edge technology has been used in development of this product, the nature of solvent-based paints means that they will discolour over time. The rate of discolouration is faster in areas with no or low natural or UV light.

Dulux Trade
High Gloss

SOLVENT-BASED
DATA SHEET 403

For general use on **interior wood** and **metal**



BENEFITS	Tough, durable finish. Excellent flow and opacity. Coverage up to 18m ² per litre**
Colour range	PBW, White and Black and more than 14,000 colours, including Colour Palette, NCS2 and BS colours
Pack sizes	1L, 2.5L, 5L
Touch dry	4-6 hours
Recoatable	16-24 hours
Coverage	Up to 18m ² per litre on sealed surfaces
Thinning	Thinning not generally required. Please refer to data sheet for details

- Tough, durable finish with excellent flow out of brushmarks
- Resistant to repeated washing and mild chemical fume attack
- Can be used on heated surfaces, e.g. hot water pipes and radiators although this may increase the speed of yellowing

**Whilst leading-edge technology has been used in development of this product, the nature of solvent-based paints means that they will discolour over time. The rate of discolouration is faster in areas with no or low natural or UV light.

Dulux Trade
Eggshell

SOLVENT-BASED
DATA SHEET 405

A tough, durable, mid-sheen finish for **interior wood** and **metal**



BENEFITS	Tough, durable finish. Self undercoating. Coverage up to 17m ² per litre**
Colour range	PBW, White and more than 14,000 colours, including Colour Palette, NCS2 and BS colours
Pack sizes	1L, 2.5L, 5L
Touch dry	4-6 hours
Recoatable	After 16-24 hours
Coverage	Up to 17m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

- Will withstand repeated washing
- Tough, durable finish with mild chemical resistance
- For best results use a good quality synthetic (nylon polyester) brush or a short pile synthetic/mohair roller designed for the application of water-based paints
- Can be used on heated surfaces, e.g. hot water pipes and radiators although this may increase the speed of yellowing

**Whilst leading-edge technology has been used in development of this product, the nature of solvent-based paints means that they will discolour over time. The rate of discolouration is faster in areas with no or low natural or UV light.

Dulux Trade
Undercoat

SOLVENT-BASED
DATA SHEET 404

The ideal foundation for **Dulux Trade High Gloss**. Provides a low-sheen finish with excellent flow out of brush marks



BENEFITS	Excellent opacity. Great flow. Coverage up to 17m ² per litre
Colour range	Brilliant White, White
Pack sizes	1L, 2.5L, 5L
Touch dry	2-6 hours
Recoatable	After 6-16 hours
Coverage	Up to 17m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

- Retains good 'cling' to sharp edges
- Can also be used with **Dulux Trade** Eggshell and Satinwood to provide surface obliteration over strong colours or poor surfaces
- For best results use a good quality synthetic (nylon polyester) brush or a short pile synthetic/mohair roller designed for the application of water-based paints

APPLICATION OF WATER-BASED TRIM FINISHES

Dulux Trade water-based range -
quick drying paints that last.

1. For the best results, use a good quality synthetic brush and dampen prior to use. This will help keep your brush workable during the application and increase the flow.



2. To achieve the best adhesion, sand the surface, removing any surface imperfections and taking back the sheen of any previous coating. Dust after sanding.



3. Dampen the area to be painted using a lint free cloth and clean water. This will increase the wet-edge time during application and help give greater flow, reducing brushmarks.



4. If you have large areas to coat, for speed you could use a medium pile roller and lay off with the tips of your synthetic brush.



5. After you have finished, just wash your tools with water.



6. Once completed, the top coat will have dried with the speed of a water-based but with the finish of a solvent-based.



EXTERIOR PRODUCTS

By using the **Weathershield** range, you can be confident that you have the **ultimate exterior protection**, with durability that lasts up to **15 years** for exterior masonry paints and up to **8 years** on exterior woodwork.



EXTERIOR PRODUCTS

EXTERIOR PRODUCTS	PLACE OF APPLICATION							TOUCH DRY	WATER/ SOLVENT-BASED
	Masonry		Render	Joinery		Smooth Planed Wood			
	Sound & Dry	Dry & Friable	Sound & Dry	General Use	New or Bare	General Use	New or Bare		
MASONRY PRODUCTS									
Maximum Exposure Smooth Masonry	•		•					30 mins	Water-based
Smooth Masonry Paint	•		•					30 mins	Water-based
Textured Masonry Paint	•		•					1-2 hours	Water-based
All Seasons Smooth Masonry	•		•					30 mins	Solvent-based
All Seasons Masonry Gloss	•		•					4 hours	Solvent-based
Stabilising Primer		•						2-4 hours	Solvent-based
JOINERY/SMOOTH PLANED WOOD PRODUCTS									
Quick Dry Exterior Gloss				•		•		2 hours	Water-based
Quick Dry Exterior Satin				•		•		1-2 hours	Water-based
Quick Dry Exterior Undercoat				•		•		1-2 hours	Water-based
Exterior High Gloss				•		•		4-6 hours	Solvent-based
Exterior Flexible Undercoat				•		•		2-6 hours	Solvent-based
Preservative Primer ^{*(BP)}					•		•	1 hour	Water-based
PREPARATORY PRODUCTS									
Exterior Flexible Filler	•			•		•		2 hours	Water-based
Multi-Surface Fungicidal Wash	•			•		•		n/a	Water-based

EXTERIOR PRODUCTS

Dulux Trade Weathershield
Maximum Exposure Smooth Masonry

WATER-BASED
DATA SHEET 522

A smooth masonry paint offering **excellent durability** and protection even in harsh and demanding environments



TIP

Before applying **Weathershield** Maximum Exposure, check the weather conditions and the temperature of the substrate to ensure that the product will cure thoroughly. Remember, it can only cure properly at temperatures above 7°C.

Chemical
Resistant



BENEFITS	15 year all weather protection. For use in demanding environments. 5x more flexible than standard Dulux Trade Masonry Paint
Colour range	PBW and 420 lightfast optimised tinted colours from the Weathershield fandeck as well as a range of NCS2, RAL and BS colours
Pack sizes	5L
Touch dry	30 minutes
Recoatable	After 2-4 hours dependent on temperature and humidity
Coverage	On smooth surfaces: 12-14m ² per litre. On textured surfaces: 4-6m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- Salt/chemical spray resistant
- Contains fungicide to help protect against the disfiguring effect of mould growth on its film
- Application from 7°C

Dulux Trade Weathershield
Smooth Masonry Paint

WATER-BASED
DATA SHEET 418

A quick drying water-based **exterior masonry paint** providing a smooth finish



Durability



BENEFITS	15 years all weather protection. Shower proof in 30 minutes. Excellent opacity
Colour range	PBW, Magnolia, 5 ready mixed colours and 420 lightfast optimised tinted colours from the Weathershield fandeck as well as a range of NCS2, RAL and BS colours
Pack sizes	2.5L, 5L, 10L
Touch dry	30 minutes
Recoatable	After 2-4 hours dependent on temperature and humidity
Coverage	On smooth surfaces of low porosity e.g. rendering: 14-16m ² per litre On textured surfaces of low porosity e.g. pebbledash: 4-6m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- For smooth exterior walls, including: blockwork, concrete, stonework, cement, rendering, roughcast, pebbledash and also brickwork (not common or fletton)
- Contains a fungicide and algicide to help protect against the disfiguring effect within the paint film

Dulux Trade Weathershield
Textured Masonry Paint

WATER-BASED
DATA SHEET 419

A quick drying water-based **exterior masonry paint** providing a textured finish



BENEFITS	10 year all weather protection. Helps bridge fine cracks. Coverage up to 8m ² per litre
Colour range	PBW and 420 lightfast optimised tinted colours from the Weathershield fandeck as well as a range of NCS2, RAL and BS colours
Pack sizes	5L
Touch dry	1-2 hours
Recoatable	After 2-4 hours
Coverage	On smooth surfaces of low porosity, e.g. rendering: 6-8m ² per litre. On textured surfaces of low porosity, e.g. pebbledash: 3-4m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- For a textured finish on exterior walls, including: blockwork, concrete, stonework, cement, rendering, roughcast, pebbledash and also brickwork (not common or fletton)
- Contains a fungicide and algicide to help protect against the disfiguring effect of surface growth

Dulux Trade Weathershield
All Seasons Smooth Masonry

SOLVENT-BASED
DATA SHEET 420

A quick drying, smooth finish which **helps to extend** the outdoor decorating season on **exterior masonry**



Durability



BENEFITS	15 year all weather protection. Shower resistant within 15 minutes. Can be applied down to 5°C
Colour range	PBW, Magnolia, Black and 225 lightfast optimised tinted colours from the Weathershield fandeck as well as a range of NCS2, RAL and BS colours
Pack sizes	4.5L, 5L*
Touch dry	30 minutes
Recoatable	After 1-2 hours
Coverage	On smooth surfaces of low porosity, e.g. rendering: 14-16m ² per litre. On textured surfaces of low porosity, e.g. pebbledash: 4-6m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- For use on exterior walls, including: blockwork, concrete, stonework, cement rendering, roughcast, pebbledash and also brickwork (not common or fletton)
- Contains a fungicide and algicide to help protect against the disfiguring effect of surface growths

*Ready-mixed colours only.

EXTERIOR PRODUCTS

Dulux Trade Weathershield All Seasons Masonry Gloss

SOLVENT-BASED

DATA SHEET 429


A quick drying, **high-sheen finish** helps to extend the outdoor decorating season on exterior walls

Dulux Trade Weathershield Quick Dry Exterior Gloss



WATER-BASED

DATA SHEET 534

A durable water-based quick drying **exterior gloss**, giving up to 6 years protection




Durability




BENEFITS	10 year all weather protection. Can be applied down to 5°C. High sheen finish
Colour range	PBW, Magnolia, Gardenia and 225 lightfast optimised tinted colours from the Weathershield fandeck as well as a range of NCS2, RAL and BS colours
Pack sizes	4.5L, 5L*
Touch dry	4 hours
Recoatable	After 16 hours
Coverage	On smooth surfaces of low porosity, e.g. rendering: 14-16m² per litre. On textured surfaces of low porosity, e.g. pebbledash: 4-6m² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- For use on exterior walls, including: blockwork, concrete, stonework, cement, rendering, roughcast, pebbledash and also brickwork (not common or flitton)
- Contains a fungicide to help protect against the disfiguring effect of mould growths on its film

*Ready-mixed colours only.





BENEFITS	6 year all weather protection. Tough and durable protection. Coverage up to 16m² per litre
Colour range	PBW and over 620 tinted colours
Pack sizes	1L, 2.5L, 5L
Touch dry	2 hours
Recoatable	4 hours
Coverage	Up to 16m² per litre
Thinning	This product should not be thinned

- Quick drying, easy clean up
- Excellent flowout of brush marks
- Contains a fungicide to help protect against the disfiguring effect of mould and growth

Dulux Trade Weathershield Stabilising Primer

SOLVENT-BASED

DATA SHEET 304


A ready-to-use sealer for use with the **Weathershield** range of masonry paints



Dulux Trade Weathershield Quick Dry Exterior Satin

WATER-BASED

DATA SHEET 428


A trim product that has the flexibility and durability of the **Weathershield** system






BENEFITS	Seals and stabilises. For powdery masonry surfaces. Ready for use
Colour range	Clear
Pack sizes	5L
Touch dry	8-12 hours dependent on temperature and humidity
Recoatable	16-24 hours
Coverage	Up to 12m² per litre on most surfaces
Thinning	This product should not be thinned

- Use only on dry exterior masonry that remains powdery and friable after thorough preparation
- Do not seal sound, new or bare surfaces





BENEFITS	6 year all weather protection. Tough and durable protection. Coverage up to 20m² per litre
Colour range	PBW and over 620 tinted colours
Pack sizes	1L*, 2.5L, 5L**
Touch dry	1-2 hours
Recoatable	After 2-4 hours
Coverage	Up to 20m² per litre on most surfaces
Thinning	This product should not be thinned

- Contains a fungicide to help protect against the disfiguring effect of mould growth on its film

*Tinted colours only.
**PBW only.

EXTERIOR PRODUCTS

Dulux Trade Weathershield Quick Dry Exterior Undercoat

WATER-BASED

DATA SHEET 531

A quick drying, **water-based undercoat** for exterior trim and woodwork



BENEFITS	6 year all weather protection. Flexible formulation. Coverage up to 16m ² per litre
Colour range	PBW and 18 tinted colours
Pack sizes	1L, 2.5L, 5L*
Touch dry	1-2 hours dependent on temperature and humidity
Recoatable	2-4 hours dependent on temperature and humidity
Coverage	Up to 16m ² per litre on most surfaces
Thinning	Thinning not generally required

- Provides excellent opacity
- Quick drying easy clean up
- Great flexibility to help absorb the natural movement of wood

*PBW only.

Dulux Trade Weathershield Exterior High Gloss

SOLVENT-BASED

DATA SHEET 401

For general use on exterior joinery and smooth planed wood. Part 3 of the **Weathershield Exterior Gloss System (WEGS)**



TIP

To get up to 8 years weather protection, you should always use the recommended system. For previously painted surfaces, apply one coat of undercoat and two coats of the gloss for a perfect gloss finish.



Durability



BENEFITS	8 year all weather protection*. Tough and durable production. Coverage up to 18m ² per litre
Colour range	PBW, Black and more than 4000 tinted colours
Pack sizes	1L, 2.5L, 5L
Touch dry	4-6 hours
Recoatable	16-24 hours
Coverage	Up to 18m ² per litre on most surfaces
Thinning	This product should not be thinned

- Provides an excellent high gloss finish
- Can also be used on plastic gutters, pipes and primed metal such as garage doors
- Contains a fungicide to help protect against the disfiguring effect of mould growth within the paint film

*Our WEGS system is accredited by the British Board of Agrément. In normal conditions WEGS will have good colour stability and perform satisfactorily for up to 8 years.

Dulux Trade Weathershield Exterior Flexible Undercoat

SOLVENT-BASED

DATA SHEET 402

A flexible exterior undercoat for use with **Weathershield Exterior High Gloss**. Part 2 of the **Weathershield Exterior Gloss System (WEGS)**



Durability



BENEFITS	8 year all weather protection*. Excellent flexibility and adhesion. Coverage up to 16m ² per litre
Colour range	Brilliant White, Dark Grey and 17 tinted colours
Pack sizes	1L, 2.5L, 5L
Touch dry	2-6 hours
Recoatable	16-24 hours
Coverage	Up to 16m ² per litre on most surfaces
Thinning	This product should not be thinned

- Provides good build and excellent opacity
- Can also be used on primed metal such as fences, pipes and garage doors
- For the best results, you should always use the correct system to ensure maximum durability

*Our WEGS system is accredited by the British Board of Agrément. In normal conditions WEGS will have good colour stability and perform satisfactorily for up to 8 years. †see back page for details

Dulux Trade Weathershield Preservative Primer+(BP)†

WATER-BASED

DATA SHEET 540

A water-based preservative basecoat for use as Part 1 of the **Weathershield Exterior Gloss System (WEGS)**



TIP

This primer is water-based, protects from decay as well as blue stain and it is better for the environment.

Durability



BENEFITS	8 year all weather protection*. Penetrates and seals new bare wood. Protects from decay and blue stain fungi
Pack sizes	1L, 2L
Touch dry	16-24 hours
Recoatable	Allow the previous coat to soak in before applying the next
Coverage	4-5m ²
Thinning	This product should not be thinned

- Provides a sound basecoat for **Weathershield Exterior Flexible Undercoat** and **High Gloss**
- Registered with HSE as a registered biocide

*Our WEGS system is accredited by the British Board of Agrément. In normal conditions WEGS will have good colour stability and perform satisfactorily for up to 8 years. †see back page for details

EXTERIOR PRODUCTS

Dulux Trade Weathershield Exterior Flexible Filler

WATER-BASED
DATA SHEET 802

An **exterior filler** for filling in open joints, splits and minor cracks in **wood** and **masonry** surfaces



BENEFITS	Superior flexibility. Resists shrinking and cracking. Easy to sand
Colour range	Light Grey
Pack sizes	450g
Touch dry	2 hours depending on depth of the repair
Thinning	This product should not be thinned, but can be made easier to apply by adding a few drops of water

- Can be used with most **Dulux Trade** exterior finishes
- Not suitable for use with varnish systems or woodstains
- Not to be used as a fine surface filler or for major repairs

Dulux Trade Weathershield Multi-Surface Fungicidal Wash

WATER-BASED
DATA SHEET 803

A fungicidal wash for cleaning **wood** and **masonry** surfaces



BENEFITS	Ready for use. Kills algae and mould growth. For wood and masonry surfaces
Colour range	Clear
Pack sizes	5L
Coverage	Up to 25m ² per litre
Thinning	This product should not be thinned

- Registered with the HSE as a registered biocide
- Can be used both inside and out with most **Dulux Trade** and **Weathershield** decorative paint systems, to give improved performance in areas subject to attack from surface growths



SPECIALIST PRODUCTS

In demanding commercial environments, the **innovative range** of specialist products from **Dulux Trade** offers you **high performing solutions**.



SPECIALIST PRODUCTS

SPECIALIST PRODUCTS	PLACE OF APPLICATION									RECOATABLE	WATER/ SOLVENT-BASED
	Interior Walls and Ceilings	Interior Concrete Walls	Exterior Concrete Walls		Exterior Brick	Cladding	Metal	Wood	Floors e.g. Wood, Concrete, Steel etc.		
			Bare	Painted							
Sterishield Diamond Matt	●									4-6 hours	Water-based
Sterishield Diamond Eggshell	●									4-6 hours	Water-based
Mouldshield Fungicidal Matt	●									4-6 hours	Water-based
Mouldshield Fungicidal Eggshell	●									4-6 hours	Water-based
Cellar Paint	●									2-16 hours	Solvent-based
Pyroshield Basecoat	●									12 hours	Water-based
Pyroshield Durable Matt	●									2-4 hours	Water-based
Pyroshield Durable Eggshell	●									2-4 hours	Water-based
Anti-Graffiti Primer	●	●	●	●						16 hours	Water-based
Anti-Graffiti Clearcoat	●	●	●	●						16 hours	Water-based
Block Filler Plus	●	●								4 hours	Water-based
Dry Fall Eggshell	●	●								2 hours	Water-based
Floorshield									●	12-16 hours	Solvent-based
High Performance Floor Paint									●	16-24 hours	Water-based
Line Marking Paint									●	1 hour	Solvent-based
Cladshield						●				4-6 hours	Water-based
PLUS Smartshield+					●					30 mins	Water-based
Aluminium Paint							●	●		16-24 hours	Solvent-based
Metalshield Gloss							●			4-6 hours	Solvent-based
Metalshield Satin							●			4-6 hours	Solvent-based

SPECIALIST PRODUCTS

Dulux Trade Sterishield Diamond Matt

WATER-BASED

DATA SHEET 519

A quick drying water-based matt emulsion, containing an in-film bactericide which inhibits bacteria. Suitable for all normal **interior wall** and **ceiling surfaces***



Durability

Anti-Bacterial



BENEFITS	Anti-bacterial. Tough, scrubbable and stain resistant. Contains an active silver bactericide
Colour range	More than 10,000 colours, including Colour Palette, NCS2 and BS colours*
Pack sizes	5L
Touch dry	Dependent upon temperature and humidity
Recoatable	4-6 hours
Coverage	Up to 16m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- Formulated to reduce bacterial populations of MRSA, E-Coli and Pseudomonas Aeruginosa
- Silver bactericide actively inhibits bacteria
- Durable washable matt finish

*For availability in very deep colours please contact the **Dulux Trade** Technical Advice Centre.
#Sterishield from **Dulux Trade** is not a substitute for good hygiene practices.

Dulux Trade Sterishield Diamond Eggshell

WATER-BASED

DATA SHEET 520

A quick drying water-based mid-sheen emulsion, containing an in-film bactericide which inhibits bacteria. Suitable for all normal **interior wall** and **ceiling surfaces***



Durability

Anti-Bacterial



BENEFITS	Anti-bacterial. Tough, scrubbable and stain resistant. Contains an active silver bactericide
Colour range	More than 10,000 colours, including Colour Palette, NCS2 and BS colours
Pack sizes	5L
Touch dry	Dependent upon temperature and humidity
Recoatable	4-6 hours
Coverage	Up to 17m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- Formulated to reduce bacterial populations of MRSA, E-Coli and Pseudomonas Aeruginosa
- Silver bactericide actively inhibits bacteria
- Durable washable eggshell finish

#Sterishield from **Dulux Trade** is not a substitute for good hygiene practices.

Dulux Trade Mouldshield Fungicidal Matt

WATER-BASED

DATA SHEET 412

A matt **emulsion paint** that contains a mild fungicide**



Anti-fungal



BENEFITS	Antifungal. Inhibits mould and fungi growth on walls. Good adhesion and durability
Colour range	PBW and over 7,000 colours, including many Colour Palette, NCS2 and BS colours
Pack sizes	5L
Touch dry	Dependent on temperature and humidity
Recoatable	4-6 hours
Coverage	Up to 17m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

- For use on interior walls and ceilings where surface mould growths are a problem
- Ideal for use on woodchip, blown vinyl wall coverings etc., as well as dry plaster and a range of building boards

##See back page for details

Dulux Trade Mouldshield Fungicidal Eggshell

WATER-BASED

DATA SHEET 409

An **eggshell emulsion** paint that contains a mild fungicide and is ideal for kitchens and bathrooms**



Anti-fungal



BENEFITS	Antifungal. Inhibits mould and fungi growth on walls. Excellent adhesion and durability
Colour range	PBW and more than 7,000 colours, including many Colour Palette, NCS2 and BS colours
Pack sizes	5L
Touch dry	Dependent on temperature and humidity
Recoatable	4-6 hours
Coverage	Up to 16m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

- More resistant to condensation than conventional emulsion paints
- For use on interior walls and ceilings where surface mould growth is a problem

##See back page for details

SPECIALIST PRODUCTS

Dulux Trade
Cellar Paint

SOLVENT-BASED
DATA SHEET 503

A durable, solvent-based acrylic system **unique to AkzoNobel**



BENEFITS	Tough and durable. Suitable for interior masonry in damp conditions. Discourages dirt retention
Colour range	PBW
Pack sizes	5L
Touch dry	1-5 hours
Recoatable	After 2-16 hours. The drying time will vary according to temperature and humidity, e.g. the drying times quoted will be significantly longer in cold, damp conditions
Coverage	Up to 16m ² per litre on sealed surfaces
Thinning	Thinning not required

- Contains a fungicide which inhibits mould growth on paint surface
- Can be applied to interior masonry surfaces (not common or fletton brickwork) that are slightly damp but not saturated, such as cellars, porches and conservatories

Dulux Trade
Pyroshield Basecoat

WATER-BASED
DATA SHEET 450

A **flame-retardant** basecoat to be used as part of a system for upgrading the reaction to fire surface classification over previously painted multi-layer Class 4 wall and ceiling surfaces*



BENEFITS	Flame retardant. Upgrades Class 4 Warrington blue board surface to Class O*. For use over multi-layered wall and ceiling surfaces
Colour range	White
Pack sizes	10L
Touch dry	2 hours
Recoatable	12 hours
Coverage	3 coats of Pyroshield are normally required to achieve a combined coverage of 0.46m ² per litre. Pyroshield Basecoat should be applied by roller to achieve a coverage of 1.4m ² per litre, per coat. A 10L container of Pyroshield Basecoat from Dulux Trade should cover no more than 14m ²
Thinning	This product should not be thinned, but must be stirred thoroughly in the can before use

- No antimony or brominated compounds. Water-based, quick drying formulation
- The thick film gives a slightly textured finish, which may be modified with appropriate texturing tools
- Overcoat **Pyroshield** Basecoat with an approved **Dulux Trade** decorative finish

*When applied in accordance with manufacturers instructions. It is essential that the specification and AkzoNobel usage instruction are strictly adhered to. Insufficient coats of the fire retardant paint or the incorrect application of it may result in a risk to both people and property in the event of a fire. The products and product information are designed for applicators who have the requisite professional skills and knowledge.

Dulux Trade
Pyroshield Durable Matt

WATER-BASED
DATA SHEET 444

A durable, matt, **flame retardant formulation** for upgrading the reaction to fire surface classification for Class 3 interior wall and ceiling surfaces



BENEFITS	Flame retardant. Upgrades Class 3 surfaces to Class O*, tested to BS476 part 6 & 7. Highly durable smooth finish
Colour range	Available in PBW, and a range of tinted colours
Pack sizes	5L
Touch dry	2-4 hours
Recoatable	2-4 hours
Coverage	2 coats of Pyroshield Durable Matt are required at a coverage of 12m ² per litre
Thinning	This product must not be thinned

- No antimony or brominated compounds
- Inhibits the spread of flame on previously painted wall and ceiling surfaces, and is proven to upgrade Class 3 substrates to Class O*
- Suitable for all plaster-based interior wall and ceiling surfaces

Dulux Trade
Pyroshield Durable Eggshell

WATER-BASED
DATA SHEET 448

A durable, eggshell, **flame retardant formulation** for upgrading the reaction to fire surface classification for Class 3 interior wall and ceiling surfaces



BENEFITS	Flame retardant. Upgrades Class 3 wall and ceiling surfaces to and Class O*, tested to BS476 part 6 & 7. Highly durable, smooth finish
Colour range	Available in PBW, and a range of tinted colours
Pack sizes	5L
Touch dry	Dependent upon temperature and humidity
Recoatable	2-4 hours
Coverage	2 coats of Pyroshield Durable Eggshell are required at a coverage of 12m ² per litre
Thinning	This product must not be thinned

- No antimony or brominated compound
- Inhibits the spread of flame on previously painted wall and ceiling surfaces and is proven to upgrade Class 3 substrates to Class O*
- Suitable for all plaster-based interior wall and ceiling surfaces

*When applied in accordance with manufacturers instructions. It is essential that the specification and AkzoNobel usage instruction are strictly adhered to. Insufficient coats of the fire retardant paint or the incorrect application of it may result in a risk to both people and property in the event of a fire. The products and product information are designed for applicators who have the requisite professional skills and knowledge.

SPECIALIST PRODUCTS

Dulux Trade Anti-Graffiti Primer

WATER-BASED

DATA SHEET 813

For use prior to applying colour and an Anti-Graffiti Clearcoat finish to previously painted surfaces or sealed, bare concrete



BENEFITS	Extra durability. For use on bare or sealed surfaces. Interior and exterior use
Colour range	White
Pack sizes	5L when mixed (4L Base and 1L Activator)
Touch dry	4-6 hours at 20°C
Recoatable	Minimum 16 hours, maximum 7 days. Hard dry after 16 hours
Coverage	Up to 10m ² per litre
Pot life	6 hours at 20°C

- Use as part of the anti-graffiti system
- For use on areas exposed to repeated graffiti
- Can also be used as a hygienic coating e.g. hospitals, industrial kitchens and food and drink processing industries

Dulux Trade Anti-Graffiti Clearcoat

WATER-BASED

DATA SHEET 816

A tough gloss finish clear topcoat for the Dulux Trade **Anti-Graffiti** system.



BENEFITS	Extra durability. For use on primed or previously coated surfaces. Interior and exterior use
Colour range	Clear
Pack sizes	5L when mixed (3.91L Base and 1.09L Activator)
Touch dry	6 hours at 20°C
Recoatable	Minimum 16 hours, maximum 7 days. Hard dry after 16 hours
Coverage	Up to 8m ² per litre

- Dries to a tough, gloss finish that has good impact and abrasive qualities
- Can be used in areas where a low odour finish is required, e.g. hospitals, school and public buildings
- Pot life of up to 2 hours once mixed
- Product contains isocyanates; requires trained user to apply. Sold via AkzoNobel specification only.

Dulux Trade Block Filler Plus

WATER-BASED

DATA SHEET 448

Fills minor imperfections and upgrades the appearance of **concrete** and **concrete blocks** to achieve a smooth finish



BENEFITS	Excellent filling properties. For use on concrete surfaces
Colour range	White
Pack sizes	10L
Touch dry	1 hour
Recoatable	4 hours
Coverage	5m ² per litre depending upon the porosity of the substrate
Application	Apply by airless spray then back roll to fill all voids and holes
Thinning	This product should not be thinned

- Can be top coated with a range of finishes
- Fast and effective spray and back rolling application

Dulux Trade Dry Fall Eggshell

WATER-BASED

DATA SHEET 444

A mid-sheen **emulsion paint** for use on commercial ceilings and walls



BENEFITS	Covers all substrates. Excellent opacity and adhesion. Overspray dries to a dust*
Colour range	White
Pack sizes	10L
Touch dry	30 minutes
Recoatable	2 hours
Coverage	Up to 9m ² per litre
Application	This product is formulated for airless spray only
Thinning	Thinning not generally required

- Ideal for use on large areas which must be painted with minimum disruption
- Excellent finish, high opacity
- Very good adhesion, quick drying

*On a drop of 10 ft/3.3m at 25°C and 50% RH

SPECIALIST PRODUCTS

Dulux Trade Floorshield

SOLVENT-BASED

DATA SHEET 507

A hard-wearing floor paint ideal for use in **domestic, commercial** and **light industrial** environments



BENEFITS	Hard wearing. Suitable for light to medium traffic areas. Mid-sheen finish
Colour range	Ash Grey and over 1,500 colours
Pack sizes	5L
Touch dry	2-4 hours
Recoatable	12-16 hours
Coverage	Up to 16m ² per litre
Thinning	Thinning not generally required

- Withstands scuffing, repeated washing and mild chemical spillage
- Formulated for use on concrete, wood and steel
- Suitable for light to medium traffic areas

Dulux Trade High Performance Floor Paint

WATER-BASED

DATA SHEET 533

A two pack water-based epoxy **floor paint** suitable for areas of high wear and commercial usage



TIP

Supplied in correct proportions – add all of the Base to the Activator container and mix thoroughly for at least 5 minutes, until the product is smooth and even.



BENEFITS	Optimum performance. Highly durable, 2 pack system. Suitable for use in heavy commercial environments
Colour range	Goosewing and Tideway
Pack sizes	5L when mixed (1.78L Base and 3.22L Activator)
Touch dry	4-6 hours
Recoatable	16-24 hours
Coverage	Up to 6m ² per litre
Thinning	Poor adhesion will result if thinned

- Highly durable mid-sheen finish
- Excellent abrasion resistance on concrete and metal floors
- Pot life of up to 1 hour once mixed

Dulux Trade Line Marking Paint

SOLVENT-BASED

DATA SHEET 525

A hard-wearing, single pack, acrylated rubber line marking paint for **interior** and **exterior** use



BENEFITS	Excellent scuff resistance. High build finish. Withstands mild chemical spillage and repeated washing
Colour range	White, yellow
Pack sizes	5L
Touch dry	30 minutes
Recoatable	1 hour
Coverage	Up to 10m ² per litre
Thinning	This product should not be thinned

- Excellent adhesion and durability
- Ideal for use in marking areas such as car parks and demarcation zones on concrete and asphalt surfaces

Dulux Trade Cladshield

WATER-BASED

DATA SHEET 532

A water-based **mid-sheen formulation** offering up to 8 years protection for cladding



BENEFITS	8 year protection. For previously painted, or weathered cladding. Highly durable
Colour range	420 light fast optimised tinted colours from the Weathershield fandeck as well as a range of NCS2, RAL and BS colours
Pack sizes	5L
Touch dry	2-4 hours
Recoatable	4-6 hours
Coverage	Up to 17m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- Tough and durable
- Suitable for application over previously painted and weathered cladding

SPECIALIST PRODUCTS

Dulux Trade PLUS Smartshield+

WATER-BASED

DATA SHEET 1007

Invisible exterior coating which effectively repels rain water for up to **10 years**.



BENEFITS	Invisible exterior water repellent coating to reduce rain water penetration into solid walls without sealing the surface, allowing the wall to dry-out; helping to improve thermal efficiency
Colour range	Clear
Pack sizes	10L
Touch dry	1-2 hours
Recoatable	Can be applied wet-on-wet once the product has been fully absorbed (approximately 30 mins). Re-coatable with exterior masonry paints (after minimum 6 months)
Coverage	Up to 2m ² per litre per coat depending on application type and absorbency of substrate.

- Fast spray application

Dulux Trade Aluminium Paint

SOLVENT BASED

DATA SHEET 505

A paint to provide an aluminium finish for interior/exterior wood and metal surfaces.



BENEFITS	Aluminium Paint is a solvent-based paint designed to provide an aluminium finish for interior/exterior wood and metal surfaces.
Colour range	Aluminium
Pack sizes	5L
Touch dry	4-6 hours
Recoatable	16-24 hours
Coverage	Up to 18m ² per litre on sealed surfaces
Thinning	This product should not be thinned

- Surfaces should be suitably clean and primed
- Can withstand temperatures of up to 260°C

Dulux Trade Metalshield Gloss

SOLVENT-BASED

DATA SHEET 512

A high performance **metal coating** formulated to provide long-lasting protection against corrosion



Durability



BENEFITS	8 year protection*. High performance protection for metal. For ferrous and non-ferrous
Colour range	White, Black, Silver, Gold and over 1,500 colours
Pack sizes	1L, 2.5L, 5L
Touch dry	1-2 hours
Recoatable	4-6 hours
Coverage	Up to 13m ² per litre
Thinning	Thinning not required

- Suitable for railings, garage doors, lift shafts, staircases and emergency exit routes
- Attractive gloss finish available in a range of colours

*Applying our straight-forward, single pack system – an appropriate Metalshield Primer plus 2 coats of Metalshield Gloss or Satin – will deliver up to 8 years metal protection

Dulux Trade Metalshield Satin

SOLVENT-BASED

DATA SHEET 541

A high performance **metal coating** formulated to provide long-lasting protection against corrosion



Durability



BENEFITS	8 year protection*. High performance protection for metal. For ferrous and non-ferrous
Colour range	White, Black and over 1,500 colours
Pack sizes	2.5L, 5L
Touch dry	1-2 hours
Recoatable	4-6 hours
Coverage	Up to 13m ² per litre
Thinning	Thinning not required

- Suitable for railings, garage doors, lift shafts, staircases and emergency exit routes
- Attractive satin finish available in a wide range of colours
- Wide choice of colours

*Applying our straight-forward, single pack system – an appropriate Metalshield Primer plus 2 coats of Metalshield Gloss or Satin – will deliver up to 8 years metal protection

WOODCARE

To protect internal and external wood for the long term, **Dulux Trade** offers a wide range of professional woodcare products. Formulated for **exceptional performance**, each has been developed to deliver **outstanding results** for any job.



CHOOSE THE RIGHT PRODUCT FOR THE JOB

There are many factors to consider when choosing the right product for any given woodcare job. You can be rest assured that with the comprehensive **Dulux Trade** range, you'll quickly find the perfect answer.

FACTORS TO CONSIDER WHEN CHOOSING WOODCARE COLOURS

- Number of coats being applied
- Application rate
- Absorbency
- Texture
- Original colouration
- Condition of substrate
- Hardwood or softwood


All of the above will affect the final colour. For this reason **Dulux Trade** recommends applying a trial coat on a small inconspicuous area before committing to a given shade.

HIGH OR LOW-BUILD?


High and medium-build products, such as the Ultimate and Quick Dry ranges, provide a thicker coat and increased durability ideal for joinery items such as windows or doors.




Low-build, such as Classic Select Woodstain, is the preferred choice when more penetration of the wood is required, and timber movement is more likely (e.g. cladding/fascias etc.)

High-build



Low-build



-  Coating above the surface
-  Coating below the surface
-  Wood layer

SEMI-TRANSPARENT OR OPAQUE?

Semi-transparent, for example Ultimate Woodstain, are available in a range of natural wood colours, and are perfect for showing off the natural wood grain.

Opagues, such as Ultimate Opaque, provide a solid colour finish, ideal for hiding imperfections, yet allow the wood texture to show.

WATER-BASED OR SOLVENT-BASED?


As with high and low-build formulations, water and solvent-based products offer differing benefits to suit different applications:

WATER-BASED BENEFITS

- Low odour
- Quick drying
- Lower environmental impact
- Minimal discolouration for clear coats
- Easy clean-up of brushes and equipment

SOLVENT-BASED BENEFITS

- Traditional
- Will not raise the grain of the wood as much
- Longer working time

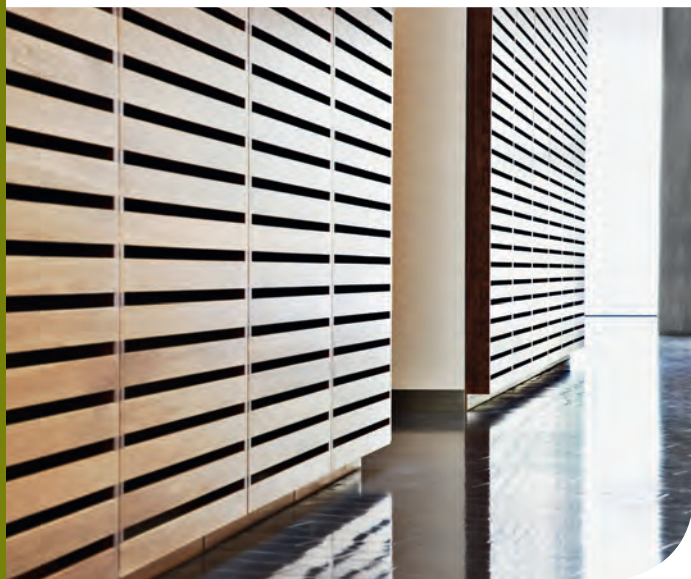

Interior Products	Place of Application							Water/ Solvent-based
	Doors	Floors	Furniture	Trim	Joinery	Product Finish		
						Semi-Transparent	Clear	
Diamond Glaze Varnish	•	•	•	•	•	•	•	Water-based
Quick Dry Varnish	•		•	•	•	•	•	Water-based
Polyurethane Varnish	•		•	•	•		•	Solvent-based
Protective Woodsheen Woodstain	•		•	•	•	•		Solvent-based
Danish Oil			•		•		•	Solvent-based

EXTERIOR PRODUCTS	PLACE OF APPLICATION						WATER/ SOLVENT- BASED
	Doors	Joinery	Fascias/Cladding	Product Finish			
				Semi-Transparent	Clear	Opaque	
Quick Dry Woodstain	●	●	●	●			Water-based
Quick Dry Opaque	●	●	●			●	Water-based
Ultimate Woodstain	●	●	●	●			Solvent-based
Ultimate Opaque	●	●	●			●	Solvent-based
Classic Select Woodstain			●	●			Solvent-based
Yacht Varnish	●				●		Solvent-based

Dulux Trade
Diamond Glaze Varnish

WATER-BASED
DATA SHEET 616

A water-based lacquer for maximum durability, ideal for **floors, doors, trim, furniture and joinery**



Durability

Quick Drying

BENEFITS	For all high wear interior wood surfaces, especially floors. Up to 10 times tougher than conventional varnish*. Water-based and quick drying
Colour range	Clear gloss and satin finishes. Also available in 21 natural wood and 18 designer colours (colours only available in satin finish)**
Pack sizes	1L, 2.5L, 5L
Touch dry	1-2 hours ^o
Recoatable	2-4 hours
Coverage	Smooth wood: up to 25m²/litre/coat (normally 2-3 coats on new/bare wood)

- Resistant to common chemicals, alcohol and water

*10 times tougher than conventional varnish, based on hardness tests undertaken with the use of Research Equipment London (REL) testing equipment; ** Depth of colour: Clear finish: Apply three finishing coats of clear satin or gloss Translucent Colour: Apply one coat of clear gloss followed by one coat of colour followed by one coat of clear (satin or gloss). Deeper colour: Apply one coat of clear gloss followed by two coats of colour.
^o Light foot traffic is possible after 24 hours but to prevent possible damage to the floor while the full mechanical resistance develops, avoid heavy wear and do not replace carpet or rugs or move furniture for at least 7 days after application.

Dulux Trade
Quick Dry Varnish

WATER-BASED
DATA SHEET 604

A quick drying interior varnish, ideal for **doors, trim, furniture and joinery**



Quick Drying

BENEFITS	Contains Polyurethane. Touch dry in 30 minutes, recoat in 2 hours
Colour range	Clear gloss and satin finishes. Also available in 21 natural wood and 18 designer colours (colours only available in satin finish)
Pack sizes	1L, 2.5L
Touch dry	30mins
Recoatable	2 hours
Coverage	Smooth wood: up to 20m²/litre/coat (normally 1-2 coats)

- Can be used on bare or previously varnished surfaces or over wood dye

Dulux Trade
Polyurethane Varnish

SOLVENT-BASED
DATA SHEET 607

A high-build interior varnish, ideal for **doors, trim, furniture and joinery**



BENEFITS	Clear solvent-based finish. Withstands knocks, scuffs and spills
Colour range	Clear gloss, matt and satin finishes
Pack sizes	1L, 2.5L, 5L
Touch dry	6-8 hours
Recoatable	16-24 hours
Coverage	Smooth wood: up to 16m²/litre/coat (normally 1-2 coats)

- Can be used on bare or previously varnished surfaces or over wood dye

Dulux Trade Protective
Woodsheen Woodstain

SOLVENT-BASED
DATA SHEET 605

A semi-transparent woodstain, ideal for **interior joinery and doors**



BENEFITS	Durable – offers up to 4 years protection for interior doors, trim and joinery. Stain resistant finish
Colour range	Available in 21 natural wood and 18 designer colours including 5 ready-mixed colours
Pack sizes	1L, 2.5L, 5L
Touch dry	4-6 hours
Recoatable	16 hours
Coverage	Smooth wood: up to 20m²/litre/coat (normally 2 coats)

- Suitable for hardwoods and softwoods
- Provides a durable finish to resist wear-and-tear

Dulux Trade Danish Oil

SOLVENT-BASED

DATA SHEET 620

A natural oil that permeates the **wood surface**, ideal for interior and **exterior furniture and joinery**



BENEFITS	Water-resistant, clear matt finish. Suitable for both internal and external hardwoods and softwoods
Colour range	Clear
Pack sizes	1L, 2.5L
Touch dry	2-4 hours
Recoatable	Min. 6 hours
Coverage	Up to 6m ² /litre depending on porosity of the wood

- Application with brush or cloth

Dulux Trade Quick Dry Woodstain

WATER-BASED

DATA SHEET 615

A quick drying, high performance semi-transparent woodstain, ideal for **exterior joinery and cladding**



Quick Drying



BENEFITS	Exceptional durability – up to 10 years protection. Excellent spreading rate of up to 20m ² per litre
Colour range	Available in 21 natural wood colours
Pack sizes	1L, 2.5L, 5L
Touch dry	1 hour
Recoatable	2 hours
Coverage	Smooth wood: Up to 20m ² /litre/coat (normally 2 coats)

- Highly flexible finish resists cracking, flaking and peeling
- Quick drying - recoatable in 2 hours

N.B. For new wood, use with **Dulux Trade Weathershield Preservative Primer** +(BP)*

*See back cover for full details.

Dulux Trade Quick Dry Opaque

WATER-BASED

DATA SHEET 611

A quick drying water-based opaque finish, ideal for **exterior joinery and cladding**



Quick Drying



BENEFITS	Exceptional durability – up to 10 years protection. Excellent spreading rate of up to 20m ² per litre
Colour range	Available in Black and White ready-mixed and 600 colours within the opaque range
Pack sizes	1L, 2.5L, 5L
Touch dry	1 hour
Recoatable	2 hours
Coverage	Smooth wood: Up to 20m ² /litre/coat (normally 2 coats)

- Highly flexible opaque finish resists cracking, flaking and peeling
- Quick drying - recoatable in 2 hours

N.B. For new wood, use with **Dulux Trade Weathershield Preservative Primer** +(BP)*

*See back cover for full details.



Dulux Trade
Ultimate Woodstain

SOLVENT-BASED
DATA SHEET 623

A high performance **semi-transparent** woodstain, ideal for **exterior joinery** and **cladding**



BENEFITS	Exceptional durability – up to 10 years protection. Excellent spreading rate of up to 20m² per litre
Colour range	Available in 21 natural wood colours including 5 ready-mixed colours
Pack sizes	1L, 2.5L, 5L
Touch dry	4-6 hours
Recoatable	16 hours
Coverage	Smooth wood: up to 20m²/litre/coat (normally 2 coats)

- Highly flexible finish resists cracking, flaking and peeling
- Excellent water repellency

N.B. For new wood, use with **Dulux Trade Weathershield Preservative Primer** +(BP)[†]

[†]See back cover for full details.

Dulux Trade
Ultimate Opaque

SOLVENT-BASED
DATA SHEET 624

A high performance opaque finish, ideal for **exterior joinery** and **cladding**



BENEFITS	Exceptional durability – up to 10 years protection. Excellent spreading rate of up to 20m² per litre
Colour range	Available in Black and White ready-mixed and 600 colours within the opaque range
Pack sizes	1L, 2.5L, 5L
Touch dry	4-6 hours
Recoatable	16 hours
Coverage	Smooth wood: up to 20m²/litre/coat (normally 2 coats)

- Highly flexible opaque finish resists cracking, flaking and peeling
- Excellent water repellency

N.B. For new wood, use with **Dulux Trade Weathershield Preservative Primer** +(BP)[†]

[†]See back cover for full details.

Dulux Trade
Classic Select Woodstain

SOLVENT-BASED
DATA SHEET 609

A low build, matt, semi-transparent woodstain ideal for large areas such as **cladding**, **facias** and **soffits**



BENEFITS	Offers up to 4 years exterior protection. Deep penetrating woodstain which will not blister or flake
Colour range	Available in 21 natural wood and 18 designer colours including 4 ready-mixed colours
Pack sizes	1L, 2.5L, 5L
Touch dry	4-6 hours
Recoatable	16 hours
Coverage	Smooth wood: up to 14m²/litre/coat (normally 2 coats). Rough sawn wood: up to 8m²/litre/coat

- Suitable for smooth planed wood and rough sawn timber

N.B. For new wood, use with **Dulux Trade Weathershield Preservative Primer** +(BP)[†]

[†]See back cover for full details.

Dulux Trade
Yacht Varnish

SOLVENT-BASED
DATA SHEET 608

A durable, solvent-based clear varnish ideal for **hardwood doors**



BENEFITS	Up to 3 years protection. Durable and flexible film which resists flaking and peeling
Colour range	Clear gloss
Pack sizes	1L, 2.5L
Touch dry	6-8 hours
Recoatable	16-24 hours
Coverage	Smooth wood: up to 16m²/litre/coat (normally 2-3 coats on new/bare wood)

- Contains UV filters which protect against strong sunlight

N.B. For new wood, use with **Dulux Trade Weathershield Preservative Primer** +(BP)[†]

[†]See back cover for full details.

The art of a perfect finish.

Introducing a quick drying,
water-based paint that lasts.

Stuart Aldous (b. 1973)
Dulux Select Decorator
Door Frame
Water-based on wood



Dulux Trade
Diamond Satinwood

AkzoNobel, the AkzoNobel logo, the flourish logo, Dulux, Dulux Trade and Dulux Select Decorators are all trademarks of the AkzoNobel group ©AkzoNobel 2019.

PRIMERS

Dulux Trade Primers offer the **highest quality products** to solve all your decorating problems, so you can achieve a **truly professional, long-lasting** finish.



PRIMERS

WOOD PRODUCTS	PLACE OF APPLICATION – INTERIOR AND EXTERIOR WOOD SURFACES					RECOATABLE	WATER/ SOLVENT- BASED
	Hardwoods	Softwoods	Resinous Woods	Creosote/Bitumen Coated Wood	MDF		
Quick Dry Wood Primer Undercoat	•	•				2-4 hours	Water-based
Quick Dry MDF Primer Undercoat					•	2 hours	Water-based
Wood Primer	•	•				16-24 hours	Solvent-based
Aluminium Wood Primer			•	•		16-24 hours	Solvent-based

METAL PRODUCTS	PLACE OF APPLICATION – INTERIOR AND EXTERIOR METAL SURFACES								RECOATABLE	WATER/ SOLVENT- BASED
	Iron		Steel		Other Non-Ferrous Metals		Galvanised Steel			
	Weathered but clean	New	Weathered but clean	New	Weathered but clean	New	Weathered	New		
Metalshield Quick Dry Primer					•	•	•	•	4-6 hours	Water-based
Mordant Solution								•	Within 48 hours	Water-based
Metalshield Zinc Phosphate Primer	•	•	•	•			•	•*	3 hours	Solvent-based

WALLS AND CEILINGS PRODUCTS	PLACE OF APPLICATION – INTERIOR SURFACES					RECOATABLE	WATER/ SOLVENT- BASED
	New & bare plaster	Limewash	Distemper	Masonry	Problem surfaces e.g. ceramic tiles		
Dry Wall Primer Sealer	•					2-4 hours	Water-based
Stain Block Primer		•	•	•		6-8 hours	Water-based
Alkali Resisting Primer	•			•**		16-24 hours	Solvent-based

ADHESION PROMOTING PRODUCTS	PLACE OF APPLICATION – INTERIOR SURFACES					RECOATABLE	WATER/ SOLVENT- BASED
	New & bare plaster	Masonry	Hardwood & Softwood	Iron, Steel, other Non-Ferrous Metals	Problem surfaces e.g. ceramic tiles		
Super Grip Primer					•	4-8 hours	Water-based
Ultra Grip Primer					•	16 hours	Water-based
All Purpose Primer	•	•	•	•	•	6 hours	Solvent-based

* If mordant solution is used
** Can also be used externally

PRIMERS

Dulux Trade Quick Dry Wood Primer Undercoat

WATER-BASED
DATA SHEET 202

A quick drying **dual-purpose primer** undercoat suitable for interior and exterior use

Dulux Trade Wood Primer

SOLVENT-BASED
DATA SHEET 201

A general purpose solvent-based **primer**



BENEFITS	Primes and undercoats in one. For soft and hardwoods. Provides excellent adhesion
Colour range	White
Pack sizes	1L, 2.5L, 5L
Touch dry	1 hour, dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 13m ² per litre on most surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

- Can be used with the **Dulux Trade** range of quick drying water-based finishes to offer a complete water-based system



BENEFITS	Seals the surface to provide excellent adhesion. For softwoods and hardwoods
Colour range	White
Pack sizes	1L, 2.5L, 5L
Touch dry	4-6 hours
Recoatable	After 16-24 hours
Coverage	Up to 15m ² per litre on most surfaces
Thinning	Thinning not generally required. Please refer to data sheet for details

Dulux Trade Quick Dry MDF Primer Undercoat

WATER-BASED
DATA SHEET 205

Dual purpose **primer** and **undercoat**

Dulux Trade Aluminium Wood Primer

SOLVENT-BASED
DATA SHEET 204

An **aluminium pigmented primer** for use on all types of wood and aged creosoted or bitumen coated surfaces



BENEFITS	Interior & exterior use. Primes and undercoats in one. For MDF surfaces
Colour range	White
Pack sizes	2.5L
Touch dry	Dependent upon temperature and humidity
Recoatable	2 hours
Coverage	Up to 13m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- For interior and exterior use
- Low odour
- Primes and undercoats in one



BENEFITS	For outstanding sealing properties. For resinous and creosoted wood
Colour range	White
Pack sizes	1L, 2.5L, 5L
Touch dry	Dependent on temperature and humidity
Recoatable	4 hours
Coverage	Up to 16m ² per litre
Thinning	Thinning not generally required. Please refer to data sheet for details

- Specially formulated to provide a dead matt, non-reflective finish in all angles
- Ideal for hiding surface imperfections

PRIMERS

Dulux Trade Metalshield Quick Dry Primer

WATER-BASED
DATA SHEET 510

A water-based primer for non ferrous metals



TIP Applying our straight-forward, single pack system – an appropriate Metalshield Primer plus 2 coats of Metalshield Gloss or Satin – will deliver up to 8 years metal protection

Quick
Drying

BENEFITS	8 year protection. For ferrous metal. Provides excellent corrosion resistance
Colour range	White
Pack sizes	1L, 5L
Touch dry	2-4 hours
Recoatable	4-6 hours
Coverage	Up to 18m² per litre on most surfaces
Thinning	Thinning not generally required. Please refer to data sheet for details

- No pre-treatment required for new surfaces
- Ensure all surfaces are sound, dry and free from grease, wax and oil
- Not recommended for use on heated surfaces, at temperatures below 10°C or in areas of high humidity or condensation

Dulux Trade Metalshield Zinc Phosphate Primer

WATER-BASED
DATA SHEET 511

High performance, primer with excellent rust inhibiting properties



TIP Applying our straight-forward, single pack system – an appropriate Metalshield Primer plus 2 coats of Metalshield Gloss or Satin – will deliver up to 8 years metal protection

BENEFITS	8 year protection. For ferrous metal. Provides excellent corrosion resistance
Colour range	Grey
Pack sizes	1L, 5L
Touch dry	2-3 hours
Recoatable	7 hours
Coverage	Up to 13m² per litre on most surfaces
Thinning	Thinning not generally required. Please refer to data sheet for details

- Can be used on heated surfaces up to 90°C
- Suitable for use over hand cleaned iron and steel, blast clean surfaces, weathered or pre-treated galvanized steel

Dulux Trade Mordant Solution

WATER-BASED
DATA SHEET 509

Chemically etches the surface of new, bright galvanized metal to provide adhesion for subsequent paint systems



BENEFITS	For preparation of new galvanized metal. Chemically etches and prepares surfaces
Colour range	Blue/Green
Pack sizes	2.5L
Recoatable	Pre-treated surface should be overcoated with appropriate Dulux Trade metal primer within 48 hours

Dulux Trade Dry Wall Primer Sealer

WATER-BASED
DATA SHEET 548

A high quality, water-based wall paint primer sealer



BENEFITS	Seals the surface to help even out surface porosity on drywall and promote a good opacity finish
Colour range	White
Pack sizes	10L
Touch dry	Dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 15m² per litre
Thinning	Thinning not generally required. Please refer to data sheet for details

- Ideal for new plaster boards

PRIMERS

Dulux Trade Stain Block Primer

WATER-BASED

DATA SHEET 307

A 2-in-1 **problem solving primer** that seals and binds surfaces and blocks common stains



BENEFITS	For interior walls and ceilings. For water damage and other light, common stains
Colour range	White
Pack sizes	1L, 2.5L, 5L
Touch dry	Dependent on temperature and humidity
Recoatable	After 6-12 hours. Note – this product can usually be recoated within 6-8 hours – but on very porous surfaces a longer drying time may be required
Coverage	Up to 14m ² per litre. 2 coats may be required on severely stained surfaces
Thinning	Thinning not generally required. Please refer to data sheet for details

- Effective treatment for stains caused by water-based and solvent-based inks, crayon, biro, coffee, scuff marks, water and nicotine

Dulux Trade Alkali Resisting Primer

SOLVENT-BASED

DATA SHEET 301

For use on **interior** and **exterior** masonry surfaces that may contain alkalis



BENEFITS	For plaster and masonry surfaces. Seals fresh, alkaline surfaces. Blocks stains such as nicotine and fire damage
Colour range	Off White
Pack sizes	1L, 5L
Touch dry	8-12 hours
Recoatable	16-24 hours
Coverage	Up to 9m ² per litre on most surfaces
Thinning	Thinning not generally required. Please refer to data sheet for details

- Seals tobacco stains and smoke damage
- Can be used as a primer on new, dry, interior plaster and masonry
- Holds back tobacco tar stains or smoke damage after thorough cleaning

Dulux Trade Super Grip Primer

WATER-BASED

DATA SHEET 309

An adhesion promoting primer for **interior** and **exterior** use



BENEFITS	Provides good adhesion on problem surfaces. For surfaces such as ceramic tiles, laminates and glass
Colour range	White
Pack sizes	1L, 2.5L, 5L
Touch dry	Dependent on temperature and humidity
Recoatable	4-6 hours
Coverage	Up to 18m ² per litre
Thinning	Thinning not generally required. Please refer to data sheet for details

- For use on surfaces such as ceramic tiles, melamine, glass, anodised aluminium, aged gloss paint, stove enamel and powder-coated metal

Dulux Trade Ultra Grip Primer

WATER-BASED

DATA SHEET 308

A two-pack primer formulated to provide excellent adhesion to both **interior** and **exterior** surfaces



BENEFITS	Provides excellent adhesion on problem surfaces. For surfaces such as stove enamels, laminates and glass. Two pack primer
Colour range	White
Pack sizes	1L when mixed (0.8L Base 0.2L Activator)
Touch dry	4-6 hours at 20°C
Recoatable	Minimum 16 hours and maximum 7 days. Hard dry after 16 hours. Recoat within 7 days for optimum intercoat adhesion
Coverage	Up to 10m ² per litre
Thinning	Thinning not generally required. Please refer to data sheet for details

- For use on ceramic wall tiles, anodised aluminium, powder-coated metal etc.
- Suitable for interior and exterior use
- Pot life of up to 6 hours once mixed

Dulux Trade All Purpose Primer

SOLVENT-BASED

DATA SHEET 303

A general purpose primer for **interior** and **exterior** use on most wood, metal and plaster surfaces



BENEFITS	For wood, metal and masonry. Provides good adhesion
Colour range	Grey
Pack sizes	1L, 2.5L
Touch dry	6 hours
Recoatable	After 6 hours
Coverage	Wood: up to 8m ² per litre. Metal: up to 11m ² per litre. Plaster: up to 7m ² per litre
Thinning	Thinning not generally required

- Penetrates bare wood to protect and seal
- Contains a rust inhibitor to protect metal surfaces against corrosion

DIAMOND WALLS ARE FOREVER*

Our most durable paint yet.
Now with anti-fade technology.

*Well, not quite forever, but at least 50x more durable than standard trade emulsion.



Learn more at duluxtrade.co.uk/Diamond



PRE- DECORATIVE PRODUCTS

Polycell Trade is a **comprehensive range** of trade formulated pre-decorative products, created to **help professionals** get the sure foundation you need for **high quality paint** and **wallpaper finishes**, as well as being practically designed for everyday use.



PRE-DECORATIVE PRODUCTS

PRE-DECORATIVE PRODUCTS	PLACE OF APPLICATION						PAINTABLE	COMPOSITION
	Level of Damage to Surface					Problem Areas		
	Minor Imperfections (Interior Only)	Medium Sized Imperfections		Large or Deep Imperfections		Stained Surfaces		
		Interior	Exterior	Interior	Exterior			
Polyfilla Quick Drying Filler	•						10 minutes	Ready-mixed
Polyfilla Fine Surface	•						1 hour	Ready-mixed
Polyfilla One Fill				•	•		From 15 minutes	Ready-mixed
Polyfilla Deep Hole				•	•		30 minutes	Ready-mixed
Polyfilla All Purpose		•	•				Up to 24 hours	Powder/ Ready-mixed
Polyfilla Easy Sand Interior Filler		•					Up to 24 hours	Powder
Polyfilla Exterior Filler			•				Up to 24 hours	Powder
Polyfilla Woodflex		•	•				Up to 24 hours	Ready-mixed
Polyfilla Decorators Caulk		•	•				1 hour	Ready-mixed
Polycell Stain Block						•	10 mins-12 hours	Solvent-based
Polyfilla Expanding Foam				•	•		12 hours	Ready-mixed
Polycell Extra Strong Paste							N/A	Adhesive for wall coverings
Polyfilla Ready-Mixed Adhesive							N/A	Adhesive for wall coverings

PRE-DECORATIVE PRODUCTS

Polyfilla Quick Drying Filler

READY-MIXED

DATA SHEET 122

For **small interior jobs** when you're in a hurry



BENEFITS	Can be used straight from the tube. Ideal for small interior jobs when you are in a hurry
Pack sizes	330g tube
Paintable	Set in as little as 10 minutes

- Sands easily
- Will not shrink or crack
- Fills hairline cracks

Polyfilla Fine Surface

READY-MIXED

DATA SHEET 116

For **filling minor to medium sized cracks**, surface imperfections and open woodgrain on interior surfaces



BENEFITS	Extra adhesive strength allows vigorous sanding and fine feathering
Pack sizes	500g, 1.75kg
Paintable	30 to 60 minutes depending on surface and surrounding conditions

- Sands to a glass-smooth finish
- No need to prime - over-paint in an hour

Polyfilla One Fill

READY-MIXED

DATA SHEET 121

A **lightweight filler** designed to fill deep repairs in one application without sagging or slumping - even on ceilings



BENEFITS	Smooth finish - no need to sand
Pack sizes	1L, 4L
Paintable	15 minutes depending on surface, temperature, relative humidity and depth of fill

- Millions of microscopic glass beads give no-sag characteristics
- Will not shrink or crack
- Not structural
- For interior and exterior use

Polyfilla Deep Hole

READY-MIXED

DATA SHEET 129/130

Fills holes up to 50mm deep in **one application** and is ready to paint from 30 minutes



BENEFITS	A structural filler for deep holes. No shrinking, cracking or sagging
Pack sizes	1kg
Paintable	From 30 minutes
Mix ratio	1:1, 2 part pack
Working time	Up to 10 minutes

- Accepts screws and nails
- Smooth finish
- Ultimate ease of sanding
- Interior and exterior use

PRE-DECORATIVE PRODUCTS

Polyfilla
All Purpose

POWDER &
READY-MIXED
DATA SHEET 112/113

For **indoor** and **outdoor repairs** to most building materials



BENEFITS	Smooth, easy to sand. Dries white, will not shrink or crack
Pack sizes	Ready-Mixed: 1kg, 2kg Powder: 2kg, 5kg, 10kg
Paintable	Up to 24 hours depending on surface, temperature, relative humidity and depth of fill. Ready Mixed 1cm layers will be surface dry in about 1 hour
Set time	Up to 4 hours depending on surface, temperature, relative humidity and depth of fill

- Accepts nails and screws
- Strong adhesion

Polyfilla
Easy Sand Interior Filler

POWDER
DATA SHEET 119/120

For indoor repairs to **plaster, plasterboard, wood, brick, stone** and most other building materials



BENEFITS	Easy to apply and long working time. Easy to sand to a very smooth finish
Pack sizes	2kg, 5kg, 10kg
Paintable	Up to 24 hours
Set time	Touch Dry - 3.5 hours per 5mm layer depending on temperature, humidity and depth of area filled
Working time	90 minutes
Mix ratio	2 parts filler to 1 part water

- Sands down easily in a fraction of time, so jobs can be finished more quickly and with a perfect result
- Ideal for painting because it's resistant to flashing and grinning
- Accepts nails and screws

Polyfilla
Exterior Filler

POWDER
DATA SHEET 115

Based on **high strength cement** and **special resins** to promote powerful adhesion, toughness and impact resistance



BENEFITS	Rock hard finish, good impact resistance
Pack sizes	2kg
Paintable	Up to 24 hours
Set time	1 hour depending on surface, temperature, relative humidity and depth of fill
Working time	30 minutes
Mix ratio	Mix approx. 2.5 volume of powder with 1 volume of water to give the desired consistency. Always add the powder to the water. For very porous surfaces use slightly more water. Fill repair slightly proud. Level to the surrounding area by either smoothing or by scraping when the filler is firm but before it sets.

- Strong adhesion, accepts fixings, nails and screws
- Always use an alkali-resistant primer before application
- Easy to sand

Polyfilla
Woodflex

READY-MIXED
DATA SHEET 124/125

Flexible, **water-resistant filler** that bonds strongly to wood



BENEFITS	Can be painted or stained. Interior and exterior use
Pack sizes	330g tube, 600ml tub
Paintable	Up to 24 hours depending on surface, temperature, relative humidity and depth of fill. 1cm thick layers will be surface dry in about 2 hours

- Dries to a smooth and flexible finish
- Water-resistant finish will not shrink or crack
- Easy to use and sand
- Specially formulated to fill holes of any depth or size

PRE-DECORATIVE PRODUCTS

Polyfilla Decorators Caulk

READY-MIXED

DATA SHEET 103/104/131

Water resistant, **flexible acrylic sealant** for interior and exterior applications



BENEFITS	Smooth finish - no need to sand
Pack sizes	290ml (white only) and 380ml (all colours)
Paintable	1 hour depending on surface, temperature, relative humidity and depth of fill

- Polycell Polyfilla Decorators Caulk is a flexible permanent acrylic sealant specially formulated for internal and external use in areas subject to movement. It is suitable for sealing around architraves and cornices, sealing cracks between skirting boards and walls, pointing around window and doorframes and filling cracked plaster. It gives a smooth finish that does not require sanding
- Available in White, Magnolia and Brown

Polycell Stain Block

SOLVENT-BASED

DATA SHEET 107/108

Permanently blocks most **problem stains** and prevents bleeding through after decoration



BENEFITS	The aerosol can be overpainted in about 10 minutes. Treats stains caused by water, nicotine, soot, graffiti, grease, wax and rust
Pack sizes	500ml, 1L, 2.5L
Touch dry	2-3 hours
Paintable	Liquid: 12 hours. Aerosol: 10 minutes
Coverage	Liquid: 7.9m ² per litre. Aerosol: 0.8m ² per 250ml

- Polycell Stain Block Aerosol permanently covers a great number of different stains, such as nicotine, soot, rust, grease, ballpoint pen and lipstick
- Available as conventional paint or aerosol
- For interior use

Polyfilla Expanding Foam

READY-MIXED

DATA SHEET 114/132

Expands to **fill large holes** and **gaps**, **inside** and **outside**



BENEFITS	Expands up to 45 times can volume. Easy to cut, sand, paint and plaster. Strong, long-lasting, damp-resistant seal
Pack sizes	750ml
Paintable	Can be cut after 1 hour and painted after 12 hours

- Will not shrink when cured

Polycell Extra Strong Paste

FLAKES

DATA SHEET 106

Instantly mixes to a smooth paste offering **easy slippage** and **excellent wet tack**



BENEFITS	Instant mix to smooth paste. Long working time, easy slip, excellent wet tack. Extra strong adhesion. Low salt content means improved stain prevention
Pack sizes	10 and 30 rolls
Coverage	Normal = 8-10 rolls per sachet. Heavy = 3-4 rolls per sachet
Drying time	14-18 hours

PRE-DECORATIVE PRODUCTS

Polycell Ready Mixed Adhesive

READY-MIXED

DATA SHEET 128

Low water content makes it **ideal for wallcoverings** prone to shrinkage. Easy to use straight from the tub



BENEFITS	Easy to use straight from the tub. High initial wet tack resulting in strong final adhesion
Pack sizes	5kg
Coverage	1 roll per kg
Drying time	14-18 hours

- Excellent slip, long open time
- Low water content means ideal for wallcoverings prone to shrinkage
- To get the best results make sure the surfaces to be papered are sound, clean and dry. (New surfaces particularly must be fully dry)
- For interior use

EXCEPTIONAL SUPPORT AND DIGITAL TOOLS

With the latest online specification tools, partnerships with our expert representatives, the **ultimate app created especially for specifiers and a commercial design service; you can be confident about achieving the right result on every project.**

DULUX TRADE PAINT SPECIFICATION CREATOR

Experience the next generation of paint and woodcare specification with **Paint Specification Creator**. Use simple filters to find the right **Dulux Trade** paint for your project and let the technology add the relevant clauses, creating a professional document for tender every time. Visit paintspecificationcreator.co.uk now.



DULUX TRADE PAINT EXPERT FOR SPECIFIERS APP

As well as being a great colour tool, the **Dulux Trade App for Specifiers** lets you view our full range of products or filter them to find the most appropriate choices for your projects; with the additional benefit of being able to quickly download the datasheets as needed.

This handy app also gives you access to the Paint Specification Creator and the Contract Partner listings on the go. **Download FREE** for iOS and Android now.




ALL THE HELP YOU NEED TO PICK THE PERFECT COLOUR



DULUX TRADE PROFESSIONAL COLOUR GUIDE

Updated annually to offer the right balance of new shades alongside traditional favourites, this key colour tool also offers inspiration and topline product information for your clients.



HERITAGE COLOUR GUIDE

The heritage range is a collection of beautiful colours that will complement any space, providing authentic period detail in today's high performance finishes.



WEATHERSHIELD PROFESSIONAL COLOUR GUIDE

Available in a wide range of colours, **Weathershield** products offer unbeatable protection for exterior masonry, wood and metal trim.



WOODCARE COLOUR GUIDE

Showcasing a stunning range of toned, bold and bright colour choices, our Woodcare Colour Guide has the perfect shade for every project, inside and out.



DULUX TRADE VISUALIZER

Our unique Visualizer tool within the **Dulux Trade** Paint Expert app shows customers exactly how their chosen colours will look on their wall in real time. Download it today.



To find out more about colour, visit duluxtradepaintexpert.co.uk/colours



Only the best get selected

Stand out from your competitors by joining our network of accredited trade professionals and enjoy the benefits of:

- Access to Dulux branded assets to promote your business
- Two year quality workmanship guarantee
- Exclusive rates on Dulux Academy courses
- Monthly updates
- Access to a members only forum
- Opportunity to enter awards & gain recognition
- Regular product discounts
- Social and networking events
- Access to Trustmark scheme



This scheme is for you if you have worked as a professional painter and decorator for 3 years and have run a successful business for at least a year. Accreditation includes a workmanship assessment and annual membership fee.

Find out more at duluxselectdecorators.co.uk
or call us on 0333 222 7022

THE PERFECT
MATCH FOR
PROFESSIONALS



The palette in your pocket.

With the NEW Dulux Trade Colour Sensor, scan a colour and get a Dulux colour match in seconds.

To find out more and get matching, please visit duluxtrade.co.uk/sensor



QUICK REFERENCE GUIDE

Product

Alkali Resisting Primer.....	74
All Purpose Primer.....	76
Aluminium Wood Primer.....	71
Anti-Graffiti Clearcoat.....	46
Anti-Graffiti Primer.....	46
Blockfiller Plus.....	47
Cellar Paint.....	44
Cladshield.....	49
Classic Select Woodstain.....	63
Colour Sampler.....	15
Danish Oil.....	60
Diamond Eggshell.....	11
Diamond Glaze Varnish.....	58
Diamond Matt.....	10
Diamond Satinwood.....	20
Drywall Primer Sealer.....	73
Durable Flat Matt.....	11
Eggshell.....	23
Evolve Matt.....	12
Fast Matt.....	15
Floorshield.....	48
High Gloss.....	48
High Performance Floor Paint.....	48
Line Marking Paint.....	49
Metalshield Gloss.....	51
Metalshield Quick Dry Metal Primer.....	72
Metalshield Satin.....	51
Metalshield Zinc Phosphate Primer.....	73
Mordant Solution.....	72
Mouldshield Fungicidal Eggshell.....	43
Mouldshield Fungicidal Matt.....	43
Polycell Extra Strong Paste.....	87
Polycell Ready-Mixed Adhesive.....	88
Polycell Stain Block.....	86
Polyfilla All Purpose.....	84
Polyfilla Decorators Caulk.....	86
Polyfilla Deep Hole.....	83
Polyfilla Easy Sand Interior Filler.....	84
Polyfilla Expanding Foam.....	87
Polyfilla Exterior Filler.....	85
Polyfilla Fine Surface.....	82
Polyfilla One Fill.....	83
Polyfilla Quick Drying Filler.....	82
Polyfilla Woodflex.....	85
Polyurethane Varnish.....	59

Protective Woodsheen Woodstain.....	59
Pyroshield Basecoat.....	44
Pyroshield Durable Eggshell.....	45
Pyroshield Durable Matt.....	45
Quick Dry Gloss.....	45
Quick Dry MDF Primer Undercoat.....	70
Quick Dry Opaque.....	61
Quick Dry Satinwood.....	20
Quick Dry Undercoat.....	21
Quick Dry Varnish.....	58
Quick Dry Woodstain.....	60
Quick Dry Wood Primer Undercoat.....	70
Satinwood.....	22
Stain Block Primer.....	74
Sterishield Diamond Eggshell.....	42
Sterishield Diamond Matt.....	42
Super Grip Primer.....	75
Supermatt.....	14
Ultimate Opaque.....	62
Ultimate Woodstain.....	62
Ultra Grip Primer.....	75
Ultra Matt.....	14
Undercoat.....	23
Vinyl Matt.....	12
Vinyl Silk.....	13
Vinyl Soft Sheen.....	13
Weathershield All Seasons Masonry Gloss.....	32
Weathershield All Seasons Smooth Masonry.....	31
Weathershield Exterior Flexible Filler.....	36
Weathershield Exterior Flexible Undercoat.....	35
Weathershield Exterior High Gloss.....	34
Weathershield Maximum Exposure Smooth Masonry.....	30
Weathershield Multi-Surface Fungicidal Wash.....	36
Weathershield Preservative Primer ^(BP)	35
Weathershield Quick Dry Exterior Gloss.....	33
Weathershield Quick Dry Exterior Satin.....	33
Weathershield Quick Dry Exterior Undercoat.....	34
Weathershield Smooth Masonry.....	30
Weathershield Stabilising Primer.....	32
Weathershield Textured Masonry.....	31
Wood Primer.....	71
Yacht Varnish.....	63

THE FUTURE RE-ENGINEERED

- PAINT MADE FROM 35% RECYCLED PRODUCT
- DELIVERS A HIGH-QUALITY MATT FINISH
- REDUCES LEFTOVER PAINT GOING TO LANDFILL



RECLAIMED > RECYCLED > RE-ENGINEERED

FIND OUT MORE AT

WWW.DULUXTRADE.CO.UK/EVOLVE

AkzoNobel and Dulux Trade are registered trademarks of the AkzoNobel Group of Companies or its affiliates. ©AkzoNobel 2019



Contact Us

To receive more information on **Dulux Trade** products register online at **duluxtrade.co.uk**

You can also request information, technical advice and help with product specification by calling **0333 222 7070**
Email: **duluxtrade.advice@akzonobel.com**

Or write to: **Trade Technical Advice Centre, AkzoNobel, Wexham Road, Slough SL2 5DS**

Interact with **Dulux Trade**



*This figure is based on theoretical calculations on pairs of bare rooms of dimensions 4x3x2.4m where the light incident on all surfaces is averaged. The rooms all have the same mid-grey floor colour (LRV 50). They have a white ceiling and a colour on the walls. In one of each pair, the colour used is from the **Light & Space** range. In the other, the colour used is from conventional products. The **Light & Space** and conventional colours have similar hue (colour family) and chroma (intensity of colour). The energy savings will not always equate to 22%. They will vary depending on the contents, dimensions and floor colour of the room and will differ if lighting in particular areas needs to be controlled. The calculated figure varies from 14% to 28% depending on the wall colour chosen. The actual light energy savings achieved in practice may differ from the calculations.

****Dulux Trade Mouldshield** Fungicidal Eggshell and **Dulux Trade Mouldshield** Fungicidal Matt contain 3-iodo-2-propynyl-n-butylcarbanate.

†Dulux Trade Weathershield Preservative Primer^(EP) contain propiconazole and IPBC.
USE BIOCIDES SAFELY. ALWAYS READ THE LABEL AND PRODUCT INFORMATION BEFORE USE.

AkzoNobel, the AkzoNobel logo, the flourish logo, Dulux, Dulux Trade, Dulux Select Decorators, Weathershield, Weathershield All Seasons, Aquatech, Polycell, Polycell Trade, Polyfilla, Woodflex Polyfilla, Metalshield, Sterishield, Mouldshield, Dulux Dry Fall, Cladshield, Pyroshield, Floorshield, Diamond Glaze, Light & Space, Lumitec and Dulux Trade Colour Palette are trade marks of the AkzoNobel group. © AkzoNobel 2019.

