### **DOOR POSITIONS & HANDINGS**

1405X2480MM

PLATFORM

TYPICAL INCOMING POWER SUPPLY

OTHERS1

LOCATION [SUPPLIED AND FITTED BY

В

D

2680 PIT AND SHAFT LENGTH

## **ALTERNATIVE PLATFORM SIZES**

# Cibes Lift Group

#### CIBES LIFT UK LTD

HEAD OFFICE CHAPEL HOUSE LEICESTER ROAD, LOUGHBOROUGH LE11 2AF TELEPHONE: 01509 436 022

CENTRE OF EXCELLENCE
UNITS 2 & 3 ENTERPRISE HOUSE, THOMLINSON
ROAD, HARTLEPOOL,
TS96 1AN



	FOOTPRINT	PLATFORM SIZE	
	1630 WIDE X 2380 LONG	1105 WIDE X 2180 LONG	
	1930 WIDE X 2180 LONG	1405 WIDE X 1980 LONG	
*	1930 WIDE X 2680 LONG	1405 WIDE X 2480 LONG	

<sup>\*</sup>SIZE SHOWN ON THIS DRAWING

DOOR OPENING WIDTH 1300mm

# LIFTING EYE OR BEAM TO BE SUPPLIED BY OTHERS [SWL 500KG] APPROX 250MM ABOVE A30 STEEL GLAZED DOOR WITH MID BAR RAL 9016 FINISH FI EVATION B FI FVATION A 2400 MINIMUM HEADROOM REQUIRED **RAL 9016 FINISH** STEEL SHAFT PANEL TOTAL LIFT TRAVEL [FLOOR TO FLOOR + 2400MM] RAL 9016 FINISH STEEL SHAFT PANEL TO FIRST FLOOR 2300 MINIMUM HEADROOM DOOR AND FRAME CLEARANCE RAI 9016 FINISH STEEL SHAFT PANEL


1930

PIT AND SHAFT WIDTH

ACCESS REQUIRED FOR ELECTRICAL

COMPARTMENT AND EMERGENCY

**BATTERY LOWERING** 

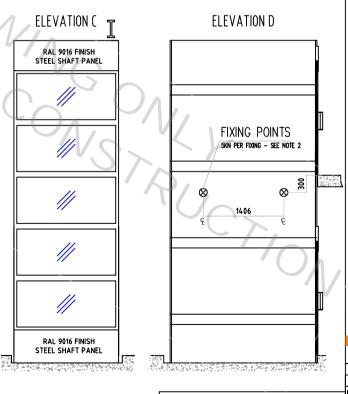

**A8000** 

DO NOT SCALE - IF IN DOUBT ASK

Α	24/11/2016	INITIAL DRAWING	DRAWN BY:	CT
SSUE	DATE	DESCRIPTION	CHECKED BY:	CD

DRAWING TITLE: A8000 OPEN FRONT 1405 WIDE X 2480 LONG PLATFORM

A8 TD 05

NOTE: GLASS SHAFT PANELS ARE SHOWN FOR ILLUSTRATION PURPOSES ONLY.

WHITE STEEL SHAFT PANELS ARE PROVIDED AS STANDARD. REFER TO QUOTATION FOR DETAILS

DIMENSIONS IN MM

#### **GENERAL NOTES**

1) A 130MM DEEP PIT IS REQUIRED ON SITE FOR THE LÍFT TO SIT INTO TO GIVE LEVEL ACCESS AT THE LOWER FLOOR (130MM PIT +6MM/-0MM)

2) IT WILL BE NECESSARY FOR THE BUILDER TO PROVIDE SUPPORT FOR THE LIFT ON SIDE D

3) THE SUPPORT WALL MUST BE PLUMB TO ±5MM. THE RELATIONSHIP BETWEEN THE LIFT BASE AND THE WALL / FIXING LOCATION IS TO BE PLUMB AND SQUARE -0/+10MM

4) THE FLOOR TO CEILING HEIGHT REQUIRED IS A MINIMUM OF 2300 (WITH PIT - 2430 NO PIT). A CLEAR HEADROOM OF 2400MM WOULD BE REQUIRED ABOVE THE UPPER FLOOR LEVEL IN ORDER TO FIT A STANDARD UNIT.

5) THE STANDARD COLOUR OF THE PLATFORM LIFT SHAFT PANELS IS WHITE RAL 9016 FINISH, OTHER COLOURS ARE AVAILABLE ON REQUEST.

6) THE UNIT IS RATED AT 1000KG AS STANDARD

7) OTHER LIFT SIZES ARE AVAILABLE. PLEASE CONTACT THE OFFICE FOR OTHER OPTIONS.

#### **ELECTRICS**

THREE PHASE SUPPLY:

A PERMANENT 415V 3 PHASE 50HZ SUPPLY IS REQUIRED (4 WIRE - NEUTRAL & EARTH) PROTECTED BY A 20 AMP FUSED AND LOCKABLE ISOLATO ISOLATOR TO BE POSITIONED EXTERNALLY OF THE LIFT ENCLOSURE. SUPPLIED AND FITTED BY OTHERS WITHIN 500MM OF THE ELECTRICAL COMPARTMENT.

<sup>\*1200</sup>mm if fire doors installed