HUWS & GRAY

A Solution for Every Problem • A Solution for Every Problem • A Solution for Every Problem • A Solution for Every Problem

A Solution for Every Problem • A Solution for Every Problem • A Solution for Every Problem • A Solution for Every Problem

A Solution for Every Problem • A Solution for Every Problem

CONTENTS

Category	Pages
Damp-proofing 'How-To'	3 - 4
Ultracure Damp-proofing Cream	5 - 8
Replastering Specifications	9 - 12
Floors and Walls	13 - 14
Anti-Condensation and Mould Control	15 - 16
External Surface Treatments	17 - 18
Wykamol Eco Range	19 - 20
Waterproofing Membrane Kits	21 - 22
Tanking Systems Guide	23 - 24
NO MORE ROT	
Microtech Ready To Use Treatments	25
Wykabor Timber Treatments	26
Lignum Pro Concentrates	27
NO MORE CRACKS	
No More Cracks Range	29
Crack Stitching Bars	30 - 32
Crack Sealer Plus Kits	33 - 34

Category	Pages
WATERPROOFING	
Wykamol Cavity Drain Membranes	35
Quadproof Ground Gas Membranes	36
Wykamol Membranes and Ancillaries	37 - 39
Contractor Training Courses CGS Contractor's Insurance Backed Guarantee Scheme	41 42



DAMP-PROOFING 'HOW-TO'

DAMP-PROOFING SYSTEM A

- 1. KNOCK EXISTING PLASTER OFF THE WALL TO A MINIMUM HEIGHT OF 1 METRE, OR AT LEAST 300 MM ABOVE ANY SIGNS OF DAMPNESS
- 2. UI TRACURE INSTALLATION
- 3. FINISH WITH AN APPLICATION OF RENDER WITH NO MORE DAMP RENDERPROOF ADDITIVE
- 4. APPLY PLASTER FINISH

DAMP-PROOFING SYSTEM B

- 1. KNOCK EXISTING PLASTER OFF THE WALL TO A MINIMUM HEIGHT OF 1 METRE, OR AT LEAST 300 MM ABOVE ANY SIGNS OF DAMPNESS
- 2. UI TRACURE INSTALLATION
- 3. RE-PLASTER USING SALT-INHIBITING AND DAMP RESISTANT NO MORE DAMP RENOVATION PLASTER
- 4. APPLY PLASTER FINISH

DAMP-PROOFING SYSTEM C

- 1. KNOCK EXISTING PLASTER OFF THE WALL TO A MINIMUM HEIGHT OF 1 METRE, OR AT LEAST 300 MM ABOVE ANY SIGNS OF DAMPNESS
- 2. ULTRACURE INSTALLATION
- 3. LEVEL THE WALL WITH AN APPLICATION OF NO MORE DAMP UNIVERSAL MORTAR
- 4. APPLY A WATERPROOF COATING OF NO MORE DAMP TANKING SI URRY
- 5. FINISH WITH AN APPLICATION OF SALT INHIBITING AND DAMP RESISTANT NO MORE DAMP RENOVATION PLASTER
- 6. APPLY PLASTER FINISH

DAMP-PROOFING SYSTEM D

- 1. KNOCK EXISTING PLASTER OFF THE WALL TO A MINIMUM HEIGHT OF 1 METRE, OR AT LEAST 300 MM ABOVE ANY SIGNS OF DAMPNESS
- 2. ULTRACURE INSTALLATION
- 3. APPLY WYKAMOL DAMP STOP MESH MEMBRANE USING PLUGS AND TAPES PROVIDED IN KIT
- 4. RE-PLASTER WITH NO MORE DAMP RENOVATION PLASTER
- 5. APPLY PLASTER FINISH









ULTRACURE® DAMP PROOF CREAM



ultracure

THE ULTIMATE CURE FOR RISING DAMP

Ultracure© is one of the leading products on the market for the control of rising damp. The unique silicone emulsion cream is injected into the masonry wall to form a barrier, protecting your walls against harmful salts and damp. Ultracure© can be used in conjunction with No More Damp Mesh Membrane Kit and Renderproof or Renovation Plaster.

ADVANTAGES



EFFECTIVE FOR AT LEAST 20 YEARS



BBA APPROVED



NO HIGH PRESSURE
INJECTION PUMP NEEDED



NO PUMP CLEANING BETWEEN



CAN BE USED IN CONJUNCTION WITH DAMPSTOP MESH MEMBRANE KIT



FINISH WITH NO MORE DAMP RENDERPROOF OR NO MORE DAMP RENOVATION PLASTER



EASY, FAST AND CLEAN INSTALLATION



VIRTUALLY ODOURLESS



CAN BE USED IN ALL
TYPES OF MASONRY



PRECISE DOSING



LOW HAZARD



Rising damp is a common problem in older properties.
In the majority of cases a remedial damp
proof course is a cost effective way of resolving your rising damp
problem with minimal disturbance.

NEED ADVICE?

Use the diagram below to help with your Ultracure© application. Always refer to the Technical Datasheet available on our website or scan the barcode to watch our installation video!





DEPTH OF HOLE = 90% OF WALL THICKNESS *Internal walls = first available mortar joint

ULTRACURE® 380 ML KIT

KIT INCLUDES:

- 8 x 380ml of Ultracure©
- Heavy duty Applicator Gun
- 1 x 12mm x 250mm SDS drill bit
- 1 x 12mm x 160mm SDS drill bit
- 1 x disposable gloves
- 1 x Extended Nozzle
- User Guide



This kit contains everything you need to complete a highly effective damp proof course. Some items are also sold seperately.

Product Description	Code	Pack Size	Typical Coverage
Ultracure Complete Kit	GB280040	KIT	1 x 380 ml covers: 115 mm brick thickness = 3.4
Ultracure Individual Cartridge	GB280050	380 ml	linear metres 230 mm brick thickness = 1.75 linear metres

RISING DAMP SOLUTIONS

ULTRACURE® 1 LITRE

The Ultracure© 1 Litre comes in a robust tube to prevent damage and is ideal for larger projects.

All the accessories for application can be purchased separately.







A heavy-duty Applicator Gun and Brass Nozzle for use with the Ultracure© 1 Litre cartridge. The spring and trigger mechanism makes application easy and mess free. 1 Litre tubes sold separately.

Product Description	Code	Pack Size	Typical Coverage
Ultracure 1 Litre Individual Cartridge	GB280045		1 x 1 Litre Ultracure covers: 115 mm brick thickness =
Ultracure 1 Litre Gun and Brass Nozzle in a Box	GB280125		10 linear metres 230 mm brick thickness = 5 linear metres

INJECTION PLUGS

These plastic plugs seal injection holes after the application of an Ultracure© DPC. The injection plugs create a colour matched seal removing the need to cover holes with sand and cement.



Product Description	Code	Pack Size
Brown Injection Plugs	GB280285-A	100
Grey Injection Plugs	GB280285-B	100
Rustic Red Injection Plugs	GB280285-C	100

For in depth technical advice speak to your Area Technical Manager. Ask in branch for their contact information or call the Wykamol Group Head Office on 0845 400 6666.

ULTRACURE® 600ML FOIL





The Ultracure© 600 ml foil sausage is easy to transport and perfect for smaller volume projects. Ultracure© 600 ml Applicator Gun and Nozzle Kit is needed for application.

600ML APPLICATOR GUN

A heavy-duty Applicator Gun and Nozzle for use with the Ultracure© 600 ml foil sausage. This Applicator Gun is made for precision and helps to reduce wastage. 600 ml foil sausage sold separately.

Product Description	Code	Pack Size	Typical Coverage
Ultracure 600 ml Foil Sausage	GB280047	1	1 x 600 ml covers: 115 mm brick thickness = 6 linear metres
Ultracure 600 ml Gun and Nozzle	GB280051	KIT	230 mm brick thickness = 3 linear metres

EXTENDED PLASTIC NOZZLE

Ultracure© extended plastic nozzles are available to fit both the Ultracure 380 ml and the Ultracure© 1 Litre cartridges.



EASY TO CLEAN OUT



ALLOWS FOR PRECISE APPLICATION



HELPS PREVENT WASTAGE



Product Description	Code	Pack Size
380 ml Extended Plastic Nozzle (12 mm diameter)	GB280140	1
1 Litre Extended Plastic Nozzle (12 mm diameter)	GB280120	1

REPLASTERING SPECIFICATIONS

RENDERPROOF PLASTER ADDITIVE



Renderproof is an additive designed for use in external and internal render coats to prevent the passage of water and residual salts, usually following the insertion of a DPC.



CAN BE USED ON ALL TYPES OF MASONRY



REDUCES PORE SIZE IN RENDER



PREVENTS PASSAGE OF RESIDUAL GROUND SALTS AND WATER



HIGHLY CONCENTRATED - 1 PART RENDERPROOF FOR 24 PARTS WATER

Product Description	Code	Pack Size	Typical Coverage
Renderproof, Pink	GB280440	1 Litre	
Renderproof, Pink	GB280450	5 Litre	0.5 Litres per 25 Kg bag of cement
Renderproof, Pink	GB280455	25 Litre	

SALT NEUTRALISING TREATMENT



Salt Neutraliser is a surface treatment used to neutralise the harmful effects of salt to your plaster finish. In cases where replastering can be avoided, salt neutraliser is used on the interior walls to prevent residual salts in the masonry from causing future damage to plaster finishes.



CAN BE USED ON ALL TYPES OF MASONRY



CAN BE USED IN A CONCENTRATED OR DILUTED FORM



CAN BE USED BEFORE REPLASTERING AFTER A DPC



CAN BE APPLIED TO PRESERVE INTERIOR PLASTER FINISH

Product Description	Code	Pack Size	Typical Coverage
Salt Neutraliser, Clear	GB280460	5 Litre	Approx. 5m² to 10m², dependent on substrate porosity

Replastering is often essential after a DPC, as residual salts can damage the plaster finish. Wykamol offer a range of replastering options with waterproofing and salt inhibiting properties.

RENOVATION PLASTER







Renovation Plaster is a fibre reinforced, lightweight, cementitious plaster to be used as part of a replastering specification after the application of a DPC. It is designed to have similar

properties to a 1:1:6 cement:lime:sand plastering mortar, but perlite replaces some of the sand to improve thermal resistance and reduce condensation. Renovation Plaster can be used in conjunction with basement waterproofing systems such as No More Damp Tanking Slurry and is part of our Wykamol Eco Product Range due to it's energy saying properties.

- CONTAINS PERLITE FOR IMPROVED THERMAL PERFORMANCE
- **✓** PREVENTS FORMATION OF BLACK MOULD
- REDUCES RISK OF CONDENSATION
- PREVENTS DAMP AND SALT MIGRATION
- ✓ EASY TO USE VERY LIGHT WEIGHT AND PREMIXED FOR QUALITY CONTROL
- FIBRE REINFORCED ELIMINATES CRACKING
- INHIBITS RUSTING OF ANGLE BEADS, CONDUITS ETC.
- **20 KG BAG FOR SAFE MANUAL HANDLING**

Product Description	Code	Pack Size	Typical Coverage
Renovation Plaster, Grey	GB280130	20 Kg	3 m²/ 20 Kg bag at 10 mm
Renovation Plaster, Grey, Pallet Rate	GB280130	50 X 20 Kg	thickness

REPLASTERING SPECIFICATIONS

SBR LATEX CEMENT ADDITIVE

A specially modified liquid latex to be added to cement based mixes for internal and external use, such as renders, screeds and patching mixes to improve resistance against water and chemicals.





CAN BE USED IN AREAS OF CONTINUOUS OR INTERMITTENT WATER CONTACT



IMPROVES FLEXIBILITY AND REDUCES CRACKING



IMPROVES RESISTANCE TO CHEMICALS AND ABRASION



IMPROVES ADHESION



IMPROVES WORKABILITY OF MIX



ALLOWS THINNER SCREED TO BE LAID



IMPARTS HIGH WATER/ SALT RESISTANCE WHEN ADDED TO MIX

Product Description	Code	Pack Size	Typical Coverage
SBR Latex, White	GB280090	5 Litre	Please refer to the Technical Data Sheet or Contact the Wykamol
SBR Latex, White	GB280095	25 Litre	Technical Deparment



DAMPSTOP MESH MEMBRANE KIT



KIT INCLUDES:

- 1M X 10M of CM3 Mesh Membrane
- 100 fixing plugs
- Fibre Tape

Dampstop Mesh Membrane Kit is a 3mm studded damp proofing membrane which is applied, studs facing the wall, using the fixing plugs and tape provided. The slimline 3 mm thickness of the membrane allows for an even plaster finish across the wall.





FAST DRYING OUT PROCESS AFTER APPLICATION OF CHOSEN FINISH

ACCEPTS DIRECT RENDER FINISH AND DOT AND DAB PLASTER BOARD

RESISTANT TO HARMFUL SALTS

CAN BE APPLIED TO DAMP WALLS

EASILY CUT DOWN USING A SHARP BLADE

Product Description	Code	Pack Size	Typical Coverage
Dampstop Mesh Membrane Kit, Clear	GB280220	KIT	10 m²
CM3 Mesh Membrane ONLY, Clear	GB280510	1 m x 10 m	10 m²
CM3 Mesh Membrane ONLY, Clear	GB280200	1 m x 20 m	20 m²
CM3 Mesh Membrane ONLY, Clear	GB280210	2 m x 20 m	40 m²

NO MORE DAMP FOR FLOORS AND WALLS

EP40 EPOXY FLOOR COATING





EP40 Floor Coating is a water based coating available in grey and clear. EP40 comes in two components, a base and a hardener, which must be thoroughly mixed before application.



EASY TO APPLY



EXCELLENT ADHESION TO CONCRETE



PROVIDES ATTRACTIVE, DUST FREE FINISH



SUBSTANTIALLY MORE
RESISTANCE TO CHEMICALS,
FUELS AND LUBRICANTS



CAN BE USED INTERNALLY
AND EXTERNALLY



FLOOR BECOMES
EASIER TO CLEAN WITH
IMPERVIOUS FINISH



CAN BE APPLIED TO GREEN CONCRETE AFTER 7 DAYS

IDEAL FOR AREAS WITH HIGH FOOT TRAFFIC AND VEHICLES SUCH AS FORKLIFT TRUCKS





Product Description	Code	Pack Size	Typical Coverage
Epoxy Floor Coating, Grey	GB280320	2.5 Litre	
Epoxy Floor Coating, Grey	GB280330-A	5 Litre	1 Litre covers 6m ² - 8m ²
Epoxy Floor Coating, Clear	GB280330-B	5 Litre	

TECHNOSEAL DAMP-PROOF MEMBRANE PAINT





Technoseal is a SBR latex-based liquid applied membrane for waterproofing applications.

Available in black and white.

NON-TOXIC, NON-HAZARDOUS AND SOLVENT FREE IDEAL IN VERY WET AREAS -

CAN BE APPLIED TO DAMP WALLS AND FLOORS

IDEAL IN VERY WET AREAS FLOORS AND WALLS IN WET
ROOMS
EASY APPLICATION BY

CAN BE PLASTERED
AND BOARDED ON TOP

BRUSH, ROLLER OR HIGH PRESSURE SPRAY FOR INTERNAL USE ONLY
UNLESS RENDERED/
PROTECTED ON TOP

APPLY TO BLOCKWORK, STONE, BRICK, TIMBER AND CONCRETE

TWO COAT APPLICATION





Eange of







Product Description	Code	Pack Size	Typical Coverage	
Technoseal, Black	GB280065	5 Litre	Covers unto 5 m² in a 2 coat application	
Technoseal, White	GB280060	5 Litre	Covers upto 5 m² in a 2 coat applica	

ANTI-CONDENSATION AND MOULD CONTROL

MOULD ERADICATION KIT



KIT INCLUDES:

- MCS 1 Mould Clear Solution
- MCS 3 Fungicidal Additive x 2
 - Soft sponge
- Protective Gloves
 - Protective Eyewear
- User Guide

No More Mould Eradication Kit contains everything you need to remove and kill mould growth in your home and prevent it returning. MCS3 Fungicidal Additive also sold separately. Always refer to the Safety Datasheet, which is downloadable from our website, and use the personal protection equiptment provided.



SOLUTION CAN BE USED ON WALLS, CEILINGS, WINDOW REVEALS, FRAMES. DOORS ETC. REMOVES AND KILLS
MOULD FOR UP TO 5 YEARS
SOLUTION CLEANS AND
STERALISES THE SURFACE

NO MORE MOULD ADDITIVE



NO MORE MOULD Fungicidal Additive is also available as an individual product. Prevent mould growth before it even happens by including No More

Mould in the decoration process.



FUNGICIDAL ADDITIVE CAN BE ADDED TO EMULSION AND GLOSS PAINTS, WALLPAPER PASTE AND GROUTS



FUNGICIDAL ADDITIVE PREVENTS FURTHER GROWTH OF MOULD SPORES



THERMALDRY ANTI-CONDENSATION



No More Damp Thermaldry Anti-Condensation Coating is both thermally insulating and water repelling. It increases the wall temperature, thus reducing the 'dew point', or the temperature at which condensation occurs.



COATING IS WATERPROOF WHEN DRY
AND WALLS ARE WARM TO THE TOUCH



TAKES UP TO 60% LONGER FOR CONDENSATION TO OCCUR ON WALLS



CAN BE PAINTED OR WALL PAPERED OVER WITH ANY FINISH, WITHOUT REDUCING ITS EFFECTIVENESS



SUITABLE FOR ANY INTERIOR WALL - PARTICULARLY EXTERIOR FACING WALLS, BATHROOMS AND KITCHENS



PREVENTS FORMATION OF BLACK MOULD AND OTHER HARMFUL FUNGI



ECO-FRIENDLY AND ANTIBACTERIAL



REDUCES THE RISK OF CONDENSATION



INCREASES THE LIFE OF YOUR CHOSEN PAINT OR WALL PAPER FINISH



*Coverage is based on a 2 coat application and dependent on porosity of substrate.

Product Description	Code	Pack Size	Typical Coverage
Thermaldry Anti-Condensation Coating	GB280425	2.5 LITRE	5-6m²*
Thermaldry Anti-Condensation Coating	GB280430	5 LITRE	10-12.5m²*

EXTERNAL SURFACE TREATMENTS

DRYSEAL MASONRY CREAM



waterproofing cream for the protection of masonry surfaces against water, pollutants and frost/ salt damage. Always perform a small test application to ensure finish is as desired.

/

EASY APPLICATION BY BRUSH, ROLLER OR LOW PRESSURE SPRAY



PROTECTS AGAINST
EFFLORESCENT SALTS
WHICH DAMAGE PAINTWORK



BECOMES EFFECTIVE IMMEDIATELY AFTER DRYING (APPROX. 3 HOURS)




CAN BE APPLIED TO DAMP SURFACES


UP TO 25 YEARS PROTECTION AGAINST WATER PENETRATION GUARANTEED

IMPROVES INSULATION BY KEEPING SURFACES DRY

ALLOWS SURFACES TO BREATH

APPEARS WHITE WHEN WET FOR EASY APPLICATION DRIES COLOURLESS AND DOES NOT STAIN SURFACES





Product Description	Code	Pack Size	Typical Coverage
Dryseal, White (clear when dry)	GB280310		Upto 20 m ² in a 1 coat application dependent on substrate porosity

From damp-proofing and waterproofing, to providing an attractive and hardwearing finish: our surface treatments do it all

ENVIROSEAL WATER REPELLENT





Enviroseal is an effective, liquid based, solvent free, silicone water repellent which can be used on a wide range of materials. Always perform a small test application to ensure finish is as desired.



EASY APPLICATION BY BRUSH, ROLLER OR LOW PRESSURE SPRAY



BECOMES EFFECTIVE IMMEDIATELY AFTER DRYING (APPROX. 3 HOURS)



WILL SHED WATERBORN DIRT AND SURFACE CONTAMINATION



ALLOWS SURFACES TO BREATH







DRYSEAL AND ENVIROSEAL CAN BE APPLIED TO A WIDE RANGE OF SUBSTRATES



Product Description	Code	Pack Size	Typical Coverage
Enviroseal, White	GB280070	5 Litre	1 Litre covers 5 m² in a 2 coat application
Enviroseal, White	GB280080	25 Litre	dependent on substrate porosity


WYKAMOL ECO RANGE PRODUCTS





The Wykamol Eco Range improves the thermal efficiency of your property. By reducing condensation and damp and preventing the growth of black spot mould it can significantly improve internal environments and therefore protect your health. For optimum performance use these 3 products to achieve the ultimate Warmer Wall, even where wet cavity wall insulation is present.



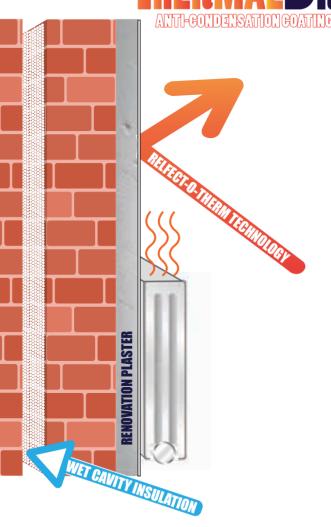



WATERPROOFING MEMBRANE KITS

BASELINE 8 MEMBRANE KIT (40M²)



KIT INCLUDES:

- 2M X 20M CM8 Membrane with 8MM Studs
- 200 Fixing plugs with Seals
- Tape

Baseline 8 Membrane Kit is a studded damp proofing and waterproofing membrane which is applied, studs facing the wall, using the fixing plugs and tape provided. Also sold separately:

- CM8 Membrane 2M X 20M
- Accessory Pack containing Plugs and Tape



CAN BE USED BELOW
GROUND AS PART OF A
WATERPROOFING SYSTEM

IDEAL FOR WALLS WHERE A CHEMICAL DPC IS NOT POSSIBLE E.G. RUBBLE FILLED WALLS

CREATES A WARMER
WALL TO HELP PREVENT
CONDENSATION AND
BLACK MOULD

, IDEAL FOR BATTENED DRY WALL SYSTEMS

RESISTANT TO HARMFUL SALTS

FULL WALL PROTECTION

AGAINST PENETRATING
AND RISING DAMP





ABOVE GROUND APPLICATION BELOW GROUND APPLICATION

For more individual membrane options please see Waterproofing Solutions (p 41)

, , , , , , , , , , , , , , , , , , ,			
Product Description	Code	Pack Size	Typical Coverage
Baseline 8 Membrane Kit, Clear	GB280020	KIT	40 m²
CM8 Membrane Only, Clear	GB280470	2 m x 20 m	40 m²
Accessory Pack, Plugs and Tape (No Membrane)	GB280025	KIT	Suitable for 40 m ² membrane

For above and below ground structures. No More Damp Membrane Kits are vapour proof and impervious to water, and should be used as part of a cavity drainage system when waterproofing basements.

DRY MESH MEMBRANE KIT (20M²)



KIT INCLUDES:

- 2M X 10M CM8 Mesh Membrane with 8MM Studs
- 200 fixing plugs with seals
- Tape

Dry Mesh Membrane Kit is a studded damp proofing membrane which is applied, studs facing the wall, using the plugs and tape provided. Also sold separately:

- CM8 Mesh Membrane 2M X 10M
- Accessory Pack containing Plugs and Tape



RESISTANT TO HARMFUL SALTS

CREATES A WARMER WALL TO HELP PREVENT CONDENSATION AND

BLACK MOULD CAN BE USED BELOW GROUND AS PART OF A WATERPROOFING



FULL WALL PROTECTION AGAINST PENETRATING AND RISING DAMP

ACCEPTS DIRECT RENDER FINISH AND DOT AND DAR PLASTER BOARD

IDEAL FOR WALLS WHERE A CHEMICAL DPC IS NOT POSSIBLE E.G. RUBBLE **FILLED WALLS**





ABOVE GROUND APPLICATION


BELOW GROUND APPLICATION

For more individual membrane options please see Waterproofing Solutions (p 41)

Product Description	Code	Pack Size	Typical Coverage
Dry Mesh Membrane Kit, Clear	GB280010	KIT	20 m²
Dry Mesh Membrane Only, Clear	GB280500	2 x 20 m	20 m²
Accessory Pack, Plugs and Tape (No Membrane)	GB280015	KIT	Suitable for 20 m ² membrane

NO MORE DAMP TANKING SYSTEM

Wykamol's No More Damp Tanking System contains an entire range of products, which when used in conjunction with each other, provide a waterproof finish for concrete and masonry. Suitable for both earth retaining walls and below ground structures as part of a BS8102: 2009 compliant system.





Product Description	Code	Pack Size	Typical Coverage
NMD Waterstop, Grey	GB280170	5KG	Please Refer to DataSheet
NMD Universal Mortar and Fillet Seal	GB280156	25KG	1.4 m ² at 10 mm thickness
NMD Tanking Slurry Bag in Bucket, Grey	GB280155	20KG	
NMD Tanking Slurry Bag, Grey	GB280160	20KG	20 Kg bag covers 7 m²
NMD Tanking Slurry Bag in Bucket, Grey Pallet Rate	GB280155	20KG x 50	20 Kg bag covers / III
NMD Tanking Slurry Bag, Greg Pallet Rate	GB280160	20KG x 50	

For in depth technical advice speak to your Area Technical Manager. Ask in branch for their contact information or call the Wykamol Group Head Office on 0845 400 6666.

NO MORE DAMP UNIVERSAL MORTAR AND FILLET SEAL

NO MORE DAMP Universal Mortar is a fibre reinforced, cementitious mortar which can be used for waterproofing, levelling and profiling and as a fillet at wall to floor and wall to wall junctions. JUST ADD WATER!



WIDE RANGE OF APPLICATIONS



AN INTEGRAL PART OF THE NO MORE DAMP TANKING SLURRY WATERPROOFING SYSTEM



HIGH BOND STRENGTH WHICH ENSURES MONOLITHIC PERFORMANCE



FIBRE REINFORCED TO GIVE IMPROVED TENSILE AND IMPACT STRENGTH



SUITABLE FOR HORIZONTAL, VERTICAL AND OVERHEAD APPLICATIONS



FACTORY BATCHED TO PROVIDE A MORE CONSISTENT QUALITY THAN 3:1 SAND:CEMENT MIX

NO MORE DAMP TANKING SLURRY







Inivers

Aortai

NO MORE DAMP Tanking
Slurry is a cementitious
waterproofing system.
Containing crystaline
technology, it is designed to
form a permanent waterproof
coating to concrete and
masonry in basements, cellars,
foundations, swimming pools,
renders, brickwork, blockwork
and many other applications.



SUPERIOR BOND STRENGTH - BECOMES PART OF THE STRUCTURE



PERMANENT WATERPROOFING FOR CONCRETE AND MASONRY



SUITABLE FOR USE
INTERNALLY AND EXTERNALLY



SUITABLE FOR USE ABOVE AND BELOW GROUND



JUST ADD WATER

SAFE TO USE IN CONTACT WITH POTABLE WATER

EASY TO APPLY USING BRUSH, ROLLER OR SPRAY



NO MORE ROT

MICROTECH WOODWORM KILLER

Wykamol's NO MORE ROT Woodworm Killer is a ready-to-use insecticidal treatment which is effective against a wide range of wood boring insects, such as woodworm, killing the infestation and preventing future infestations. Always refer to the safety datasheet prior to application, which is downloadable from our website.





PROTECTION IS LONG LASTING



KILLS ACTIVE INFESTATIONS AND PREVENTS FUTURE INFESTATIONS



MICROEMULSION TECHNOLOGY FOR DEEP PENETRATION OF TIMBER

CAN BE APPLIED BY BRUSH AND LOW PRESSURE SPRAY



QUICK DRYING. NON-FLAMMABLE AND VIRTUALLY

MICROTECH DUAL PURPOSE

ODOURI ESS

Lignum Wood Preserver is a ready-to-use fungicidal and insecticidal treatment which is effective against a wide range of wood rotting fungi (wet rot and dry rot) and wood boring insects. Always refer to the safety datasheet prior to application, which is downloadable from our website.





PROTECTION IS LONG LASTING



KILLS ACTIVE INFESTATIONS AND PREVENTS FUTURE INFESTATIONS



MICROEMULSION TECHNOLOGY FOR DEEP PENETRATION OF TIMBER



SUITABLE FOR INTERIOR AND EXTERIOR USE



QUICK DRYING, NON-FLAMMABLE AND VIRTUALLY ODOURLESS



CAN BE APPLIED BY BRUSH AND LOW PRESSURE SPRAY

Product Description	Code	Pack Size	Typical Coverage
Microtech Woodworm Killer		5 Litre	Up to 50 m²
Microtech Dual Purpose		5 Litre	Curative = Up to 16.5 m ² Preventative = 25 m ²



WYKABOR 10.1

Wykabor 10.1 is an aqueous wood preservative for the eradication of common furniture beetles and other wood boring insects, and the prevention of fungal decay in sound timbers. Always refer to the safety datasheet prior to application, which is downloadable from our website.





MULTI-PURPOSE PRESERVATIVE



HIGHLY PENETRATING



VERY LOW ODOUR



NON-FLAMMABLE



SUITABLE FOR USE ON THE COMMON FURNITURE BEETLE AND OTHER WOOD BORING INSECTS

WYKABOR 20.1

Wykabor 20.1 is a brushable and injectable gel for use on timbers at high risk of damage by wood boring insects, dry rot and wet rot. It is ideal for joist ends, purling, wall plates, cut ends and rafters. Always refer to the safety datasheet prior to application, which is downloadable from our website.





HIGHLY PENETRATING

PERMANENT PROTECTION



KILLS ACTIVE INFESTATIONS AND PREVENTS FUTURE INFESTATIONS



3 IN 1 TREATMENT - DRY ROT, WET ROT AND WOOD BORING INSECTS



CAN BE APPLIED BY BRUSH OR INJECTED INTO PRE-DRILLED HOLES



ODOURLESS. NON-STAINING AND EASY TO HANDLE




LOW ENVIRONMENTAL HAZARD

Product Description	Code	Pack Size	Typical Coverage
Wykabor 10.1	GB280421	5 Litre	Approx. 20 m²
Wykabo 10.1	GB280422	25 Litre	Approx. 100 m²
Wykabo 20.1 Gel	GB280423	5 Litre	Approx. 10 - 12.5 m²

NO MORE RO

LIGNUM PRO D156 CONCENTRATE

Lignum PRO D156 is a concentrated treatment for the eradiction and prevention of wood boring insects and wood destroying and discolouring fungi. It is diluted with water and applied by brush or low pressure spray.










LIGNUM PRO 162.5 CONCENTRATE

Lignum PRO I62.5 is a concentrated treatment for the eradication and prevention of wood boring insects. It is diluted with water and applied by brush or low pressure spray.



PROTECTION IS LONG LASTING

KILLS ACTIVE INFESTATIONS AND PREVENTS FUTURE INFESTATIONS







PREVENTS FUNGAL DECAY AND BLUE STAIN

Product Description	Code	Pack Size	Typical Coverage Once Diluted
Lignum PRO D156	GB280410	1 Litre	82.5 m² - 250 m²
Lignum PRO I62.5	GB280420	1 Litre	82.5 m² - 125 m²



162.1

WAR EXIGIN



NO MORE CRACKS

Buildings constructed primarily out of masonry are susceptible to types of movement which will resuly in structural defects.

For the typical structural issues that arise in properties across the UK, Wykamol's NO MORE CRACKS range offer a solution.

Retrofit of cavity wall ties, cavity wall tie replacements and remedial crack stitching are just 3 issues which can be rectified by the easy-to-use NO MORE CRACKS Kits.



HELICAL CRACK STITCHING BARS

Helical reinforcement bars are ideal for stitching cracks in brickwork, reconnecting walls either side of the fracture and dissipating load along the length of the helix. The twisted Thor Helical Remedial bars can also be used as bed joint reinforcement to form deep masonry beams that carry and transfer imposed loads.



NOMOREGRACIOS

NO MORE CRACKS CRACK STITCHING KIT




KIT INCLUDES:

- 10 x 1 M Thor Helical Crack Stitching Bars in Grade 304 Stainless Steel
 - 1 x 10 Ka tub containing 2 x 5 Kg of W60 Flexi Grout (vield = 3 L)
- 1 x Grout-Master Applicator with Hi-Flo Nozzle
- 1 x Mixer paddle
- 1 x Finger Trowel

Product Description	Code	Pack Size
NMC Crack Stitching Kit	GB280300	KIT
Crack Stitching Bar 6 mm x 1000 mm	GB280290	1
Grout-Master Applicator with Hi-Flo Nozzle (yellow)	GB280400	1
W60 Flexi Grout, 2 x 5 Kg in a Bucket	GB280295	10 Kg/ 3 L Yield

WHERE DO I PLACE CRACKSTITCHING **BARS?**



Depth of			
Masonry	Slot	Grout	Rod
102 mm	30 mm	20 mm	20 mm
215 mm	45 mm	30 mm	30 mm

Tolerances = + 5 mm / - 0 mm

HOW TO USE CRACK STITCHING BARS

HOW DO I INSTALL CRACK STITCHING BARS?









- Chase horizontal slots at 300 mm intervals that extend 500 mm on each side of the crack.
- Clear loose debris from slots and flush thoroughly with water.
- Pump bead of WHO60 cement grout to rear of slot, filling it evenly to approximately two thirds full.
- Push helical crack stitching bar into grout, to approximately two thirds of the slot depth. Trowel displaced grout to firmly encapsulate the bar.
- Make good the wall chase to disguise the slot. Repair cracks between the helically reinforced masonry with Crack Sealer Plus.

回路計画 所提集 回接集

WATCH OUR INSTALLATION VIDEO

NOMORECRACKS

CRACK SEALER PLUS



KIT INCLUDES:

- 1 x Crack Sealer Base
- 1 x Crack Sealer Hardener
 - 1 x Plunger Plate
- 1 x Piston
- 1 x 400 cc Cartridge
- 1 v Nozzla Sat

No More Cracks Crack Sealer Plus is a 2 part epoxy adhesive specifically formulated for repairing fine cracks in brick, block, stone, concrete and masonry.



PROVIDES A WATERPROOF SEAL



QUICK AND EASY TO USE



SUITABLE FOR BRICKS, BLOCKS. RENDER AND CONCRETE



FILLS CRACKS FROM 2 MM - 12 MM WIDE WITHOUT INJECTION PORTS



FLEXIBLE 2 MM AND 4 MM INJECTION NOZZLES FOR ULTRA-FINE CRACKS



GEL RAPIDLY AND CURES

WITHIN 12 HOURS





Before After During



Before During After

Product Description	Code	Pack Size
Crack Sealer Kit for Brick	GB280370-A	300 ml
Crack Sealer Kit for Renders	GB280370-B	300 ml

HOW TO USE CRACK SEALER PLUS

- Add the content of the smaller container (hardener) to the content of the larger container (base).
- Mix the two pastes thoroughly, ideally with a mixing knife.
- Place the follower-plate onto the surface of the mixed material, ensuring it sits parallel to the edges of the tub, with the lip pointing upwards
- Place the back end of the cartridge centrally over the hole in the follower plate. Press the cartridge firmly and continuously down until the follower plate bottoms on the mixing tub base.
- Carefully remove and invert the now full cartridge
- Assemble the nozzle adaptor and nozzle and attach to the cartridge. Insert the rear end plunger.







WATERPROOFING SOLUTIONS



The Wykamol Group are the only UK based manufacturers of waterproofing materials who offer to Design, Advise and Supply all your waterproofing projects.

Ask in branch to contact your local Technical Expert.

We will visit site, design your waterproofing specification, provide your local branch with a list of the products you need and deliver them directly to site.

Our Structural Waterproofing specialists can aid you in obtaining a 10 Year Insurance Backed Guarantee, supply products for waterproofing systems Type A, B and C and specify at every stage of a project.

WYKAMOL CM CAVITY DRAIN MEMBRANES

Wykamol are the only UK manufacturers of HDPE Cavity Drain Membranes and our extensive range offers varying stud heights, for different drainage capacities and membranes with or without mesh, suitable for a range of finishes. For product codes on Cavity Drain Membranes and Ancillaries please see overleaf.





WATCH OUR BASEMENT WATERPROOFING VIDEO





QUICK TO INSTALL - MINIMAL PREPARATION NEEDED TO WALL SURFACES

A EASY TO FOLD AROUND WINDOWS AND DOORS

★ EASILY CUT DOWN USING A SHARP BLADE


PART OF A TYPE C CAVITY DRAIN MEMBRANE SYSTEM IN LINE WITH BS8102:2009


CLEAR FOR EASY APPLICATION AND FIXING OF WYKAMOL
CM BRICK AND CM PLASTER PLUGS

TYPE C GROUND GAS AND WATERPROOFING MEMBRANES

QUADPROOF MEMBRANES

The Wykamol Quadproof membrane is a polyethylene membrane available with bonded textile for pre-applied applications or with an all weather adhesive backing for post-applied applications. Quadproof protects against Methane, Carbon Dioxide, Radon, Ground Gases, VOCs, Hydrocarbons, air and moisture.





FULL SURFACE CONTACT BETWEEN THE MEMBRANE AND CONCRETE

MANUFACTURED TO MEET THE MOST UP-TO-DATE BRITISH STANDARDS BS8485:2015 AND BS8102:2009

A EXCEPTIONAL CHEMICAL RESISTANCE

LONG TERM DURABILITY (PERFORMANCE GUARANTEED FOR LIFETIME OF THE BUILDING)

QUICK AND EASY INSTALLATION

WATERPROOFING BARRIER TYPE A AND GROUND GASES
BARRIER IN ONE

SUPER BONDING SELF-ADHESIVE BITUMEN (POST-APPLIED)

Product Description	Code	Pack Size
Quadproof Bond (Pre-applied)	QPBOND	25 m²
Quadproof Tank (Post-applied)	QPTANK	20 m²
Quadproof Loose Lay	QUADPROOF	50 m²
Quadproof Liquid Gas Barrier	QPLGB	15 Kg
Quadproof Primer	QPPRIMER25	25 Litre
Quadproof Reinforcement Flex Tape	QPRFTAPE	1.2 m x 5 m
Quadproof Detailing Strip	QPDSTRIP	1 m x 25 m
Quadproof Tape	QPTAPE	1 m x 15 m
Quadprood Extension Tape	QPEXTAPE	0.3 m x 20 m
Quadproof External Corner Unit	QPEXTCORNER	1
Quadproof Internal Corner Unit	QPINTCORNER	1

WYKAMOL STRUCTURAL

PRODUCT	CODE	DESCRIPTION	PACK SIZE
	GB280560	CM3 MEMBRANE 2M X 20M, BLACK	40M²
1	GB280470	CM8 MEMBRANE 2M X 20M, CLEAR	40M²
3	GB280480	CM8 MEMBRANE 2.4M X 20M, CLEAR	48M²
	GB280500	CM8 MESH MEMBRANE 2M X 10M, CLEAR	20M²
	GB280400	CM8 MESH MEMBRANE 2 M X 20 M, CLEAR	40M²
	GB280540	CM20 MEMBRANE 2M X 10M, BLACK	20M²
	GB280550	CM20 MEMBRANE 2M X 20M, BLACK	40M²
	GB280590	SUREPROOF MEMBRANE PRIMER	5 L
-	GB280580	SUREPROOF EXTERNAL MEMBRANE 1M X 20M	20M²
9	GB280600	SUREPROOF TAPE 300MM X 20M	1
	GB280770	MICROSEALER	25 L
· Market	GB280250	BRICK PLUGS WITH SEALS	200
と	GB280230	WYKAMOL PLASTER PLUG (NO SEALS)	200

WATERPROOFING ANCILLARIES

PRODUCT	CODE	DESCRIPTION	PACK SIZE
1	GB280235	WYKAMOL PLASTER PLUG WITH SEALS	200
	GB280630	WYKAMOL CORNER STRIP 150MM X 20M	1
1	GB280640	WYKAMOL OVERSEAL TAPE 75MM X 22.5M	1
9	GB280260	FIBRE TAPE FOR MESH MEMBRANES 115MM X 25M	1
1	GB280620	WYKAMOL ROPE 10MM X 5M	1
31	GB280610	WYKAMOL TAPE 28M X 22M	1
2	PUMPONLY3	WYKAMOL PUMP 6.8	1
2	PUMPONLY4	WYKAMOL PUMP 12.4	1
G.	GB280660	SINGLE PUMP SUMP KIT (6.8), TWIN OUTLET + METAL LID	1
200	GB280670	DOUBLE PUMP SUMP KIT (2 X 12.5) TWIN OUTLET + METAL LID	1
Sales of the sales	GB280680	PUMP SUMP KIT (2 X 6.8), BATTERY BACKUP, TWIN OUTLET + METAL LID	1
Book !	GB280690	PUMP SUMP KIT (2 X 12.5), BATTERY BACKUP, TWIN OUTLET + METAL LID	1
	GB280700	AQUASAFE ALARM WITH BATTERY BACKUP AND BUILT IN SERVICE ALARM	1

PRODUCT	CODE	DESCRIPTION	PACK SIZE
+	GB280710	UNIVERSAL CHANNEL OUTLET	1
10	GB280720	WATERGUARD CHANNEL 2M	1
-	GB280730	WATERGUARD JETTING EYE EXTENSION	1
1	GB280740	WATERGUARD DRAINEND LEFT	1
8	GB280750	WATERGUARD DRAINEND RIGHT	1
S.	GB280760	WATERGUARD DRAINOUTLET 34MM	1
	GB280770	WATERGUARD CORNER INTERNAL	1
*	GB280780	WATERGUARD CORNER EXTERNAL	1
5	GB280790	HEAT RECOVERY VENTILATOR UNIT KHRV150	1
8	GB280790-B	HEAT RECOVERY VENTILATION EXTENSION KIT	1
-	GB280170	WATERSTOP FAST-SETTING, PLUGGING WATERPROOF MORTAR	5KG
	GB280150	HYDRADRY TANKING SLURRY	20KG BAG



WYKAMOL CONTRACTORS TRAINING COURSES

TAP INTO SOME OF THE BEST TECHNICAL ADVICE IN THE COUNTRY

The Wykamol Group like to ensure that contractors are installing our products to the highest possible standard and to achieve this, we arrange regular and well attended Contractor's Training Courses throughout the country. Please ask in branch or contact Head Office for information on course availability in your area.

TRAINING COURSE CONTENT







Wykamol Contractor's Training Courses are suitable for start-up contractors and established contractors who would like to become a Wykamol Registered Installer* and apply to become a member of CGS - Construction Guarantee Solutions.

*Becoming a Wykamol Registered Installer is a process which begins with attending a Contractor's Training Course and includes inspection of at least 3 on-site projects. Contractors are then entered into our database against their chosen Merchant Partner and Branch. The awarding of Registered Installer status is at the discretion of the Wykamol Group's Technical Department. The Wykamol Group Limited are not responsible for any work completed by a Registered Installer.

CGS LIMITED INSURANCE BACKED GUARANTEES



WHAT IS CGSP

CGS or Construction Guarantee Solutions issue insurance backed guarantees to homeowners when a member of CGS completes a project on their home.

Homeowners are insisting on insurance backed guarantees more and more, as the guarantee is valid in every eventually, even if the contractor is no longer trading. Considering that 70% of all companies go out of business within 20 years, why would you take the chance?

Sticking a pin into a phone book gives you a 20-1 chance of finding a contractor good enough to be backed by an insurance company authorised and regulated by the FSA.

When comparing, quotes ask competing contractors which of these they can offer (if any):

- Actual insurance period of 10 years (with the option of extending this period when it expires)
- 2. Independent checking for technical competence
- 3. Health and safety competence and financial stability
- 4. Underwriter that is authorised and regulated by the FCA
- 5. Access to the Financial Ombudsman Service
- 6. Insurance certificate for each property
- 7. Security of the Financial Services Compensation Scheme
- 8. NHBC and Zurich Approved
- Insurance Premium Tax (IPT) applied (as required by law for all genuine insurance)
- 10. Automatic free assignment on sale of property
- 11. Protection against contractor failure for any reason

For more information on becoming a member of CGS and issuing insurance backed guarantees, contact your Area Technical Manager.

Ask in Branch for a list of Contractors who can offer CGS Guarantees.

HUWS & GRAY

A Solution for Every Problem • A Solution for Every Problem • A Solution for Every Problem • A Solution for Every Problem

A Solution for Every Problem • A Solution for Every Problem • A Solution for Every Problem • A Solution for Every Problem

A Solution for Every Problem • A Solution for Every Problem