

# KNOCKONWOOD FREESTANDING DBE

## STYLISH AND POWERFUL

- Developed for the house of the future, "Living Tomorrow", in Vilvoorde-Belgium.
- Completely pre-assembled including DBE units, connection set and TRV head.
- Casing with curved wooden shell finished in high-grade veneer in 9 wood finishes.
- Hidden control with pre-mounted connection set and TRV head.
- Low-H<sub>2</sub>O technology with super conductive and ultra fast heat exchanger for low energy consumption and maximum heat emission.
- DBE (Dynamic Boost Effect) for compact dimensions at super-low water temperatures from 28 °C.
- Safe surface temperature.



Certification only for  
oak natural,  
beech natural,  
maple natural,  
oak bleached,  
beech bleached,  
oak wenge-colour

**LIVING  
TOMORROW™**  
Where visions meet



PRESENTING KNOCKONWOOD FREESTANDING DBE



CREATE  
EMOTION



## HEIGHT 210 - OUTPUT TABLES



KNUF. 021 LLL 15.XXX/DBE/...

L mm	Type	STANDBY*		COMFORT		
		Watts 75/65	Watts 55/45	Watts 75/65	Watts 55/45	Watts 35/30
1100	15	1178	575	1678	1007	420
1300	15	1414	690	2164	1298	541
1700	15	1885	920	2885	1731	721
2100	15	2356	1150	3606	2164	902

Completely pre-assembled including DBE units, connection set and TRV head

EN442 output at 20°C room temperature

\*Stand-by is the static output if the activators are not working. Transition from Stand-by to Comfort is effected automatically in accordance with the thermal need. Boost output see: [www.jaga.co.uk](http://www.jaga.co.uk)


### ORDERING CODE

code height length type wood  
**KNUF . 021 110 15 . XXX /DBE/...**  
 fill in type of wood  
 fill in sleeve coupling Eurocone  
 Precision metal tube 14/1 **114**  
 Precision metal tube 15/1 **115**  
 Precision metal tube 16/1 **116**  
 RPE/ALU tube 16/2 **316**  
 (other sleeve couplings:  
 see "Connection sets and Valves")

### DELIVERY

Product is made to order, please contact our customer service team on 01531 631 533 to discuss your requirements.

### DIMENSIONS (in mm)

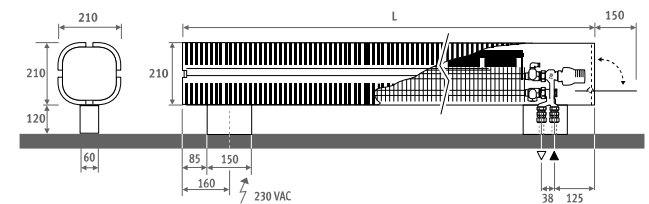

### WOOD FINISHES

The wooden casing is finished with a scratch-resistant polyurethane varnish, satin matt, gloss degree 40%. High UV resistance.

#### Category 1



#### Category 2

