

Forticrete masonry

an IBSTOCK plc company



Simple yet beautiful

Dense Concrete Masonry (DCM) Blocks





Front cover:

Product: Polished Florentine® Yorkstone
Project title: Etrop Court, Wythenshawe
Client: St. Modwyn Developments
Contractor: Allenbuild
Architects: AEW Architects Manchester

Product: Splitface Yorkstone &
Polished Florentine® Hamstone
Project title: Tesco Store, Ashley Gateway
Retail Park, Widnes
Client: Morbaine Developments
Contractor: Britannia Construction
Architects: Gordon White & Hood,
Leicester

Dense Concrete Masonry blocks
and the environment

pages
4-5



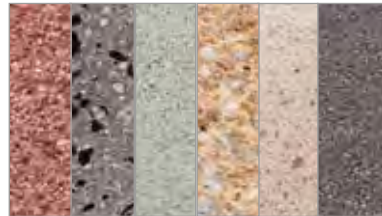
Finishes and profiles

pages
6-9



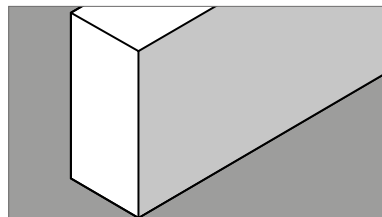
Colours

pages
10-19



Standard sizes and weights

pages
20-23



Bespoke specials

pages
24-25



Dense Concrete Masonry



Forticrete has always set the standards in dense concrete masonry innovation.

All Forticrete factories operate to the highest standards, whether it is the international Quality Standard BS EN ISO 9001, ISO 14001 for Environmental Management or BES6001 for Responsible Sourcing. This ensures a product of quality with dimensional accuracy and a variety of colour and finishes.

Innovative products that don't cost the earth

Together with our commitment to act as a socially responsible corporate citizen, Forticrete views the development of products to specifically benefit the environment as a significant opportunity.

This is key to our company strategy, and also forms an important part of Best Practice exchanges.

There is also increasing recognition of the environmental benefits of many of our established products which allow energy consumption to be reduced.

The benefits of using concrete products in new home building are recognised within the Code for Sustainable Homes and the Green Guide to Specification, where constructions that use both masonry and roof tiles are awarded an A or A+ rating.

 We introduced an 'ECO' branding scheme for product development some 10 years ago to enable our customers to instantly recognise that our products have high environmental credentials. These products have various benefits over traditional products.

As a consequence of our manufacturing facilities conforming to the quality standard BS EN ISO 9001, environmental management standard BS EN ISO 14001 and the responsible sourcing standard BES 6001, all of our products carry an 'ECO' mark.

 Where a product has additional benefits which are not recognised by The Green Guide to Specification or has recycled content of over 30%, then we have distinguished them with our 'ECO-PLUS' logo to allow their unique qualities to be acknowledged.



Secondary and Recycled content of Hess made products

Product Range	Colour	Secondary and Recycled Contents
DCM	Autumn	15
DCM	Bathstone	20
DCM	Bellini	20
DCM	Bronzino	0
DCM	Damson	15
DCM	Diamond	0
DCM	Flint	20
DCM	Hamstone	20
DCM	Ivory	10
DCM	Pewter	15
DCM	Romano	10
DCM	Sandstone	20
DCM	Spirito	2
DCM	Sports Green	20
DCM	Sports Blue	20
DCM	Spruce	15
DCM	Straw	20
DCM	Steel Grey	20
DCM	Terracotta	20
DCM	Yorkstone	20
Granito™	Natural and Dark	40
Novastone®	White and Yellow	40



Product: Splitface Diamond
Project title: Clapham One, South London
Client: Cathedral Group
Contractor: United House
Architects: Studio Egret West

Finishes



Example:
Fairfaced Yorkstone

Fairface finish

The original and still the leader in the field

Fairface masonry offers the benefits of a structural product and finish in one. Its quality finish, dimensional stability, range of subtle, natural colours and economy against competitive materials maintain its position as the leader in its field.



Example:
Shot-blasted
Sports Green®

Shot-blasted finish

Provides a weathered appeal

Shot-blast masonry adds a natural weathered appeal. With a broad selection of 'special' shapes and sizes as standard, Shot-blast offers an almost limitless variety of options.



Example:
Burnished Venezia™
Steel Grey

Burnished Venezia™ finish

The subtle beauty of burnished natural aggregates

A subtly burnished finish brings out all the deeply embedded beauty of the natural aggregates. For projects where reduced glare is a consideration this finish offers an understated beauty for internal or external walls.



Example:
Splitface Autumn

Splitface finish

Emulating the rugged appeal of natural hewn stone

Cost-effective and offering flexibility, Splitface adds a prestigious appearance to any building, whether creating complete, imposing structures or in combination with other Forticrete products, in feature panels and bands.



Example:
Trentino™ Hamstone

Trentino Finish

A new smooth tactile finish, creating an appearance of stone that has been naturally weathered by water erosion

A delicate brushed block creating an undulating glossy finish with standout black aggregate.




Example:
Florentine® Straw
Polished

Polished Florentine® finish

Affordable prestige inside or out

Use this to create broad expanses of reflective, decorative walling or in combination with other Forticrete Masonry products to provide impressive highlights.



Example:
Granito™ Dark

Granito™ fine etched finish

Combining the sparkle of a granite finish with environmental benefits

Manufactured with a high content of recycled material, Granito allows you to create a stunning façade or alternatively, combines perfectly with other products from the Forticrete masonry range.



Example:
Bellini®

Polished Medici

Combines rich blends of selected natural aggregates with a polished face in a range of elegant colour variations

The face finish replicates the rich texture of marble or granite.



Example:
Novastone®
White

Novastone® fine textured masonry finish

A fine textured masonry finish with time-weathered appeal

Novastone is a range of components which will give you that natural, weathered appeal from the day they are laid, enabling brand new buildings to blend into established surroundings with impressive ease.

Profiles



Standard Profile

The most popular profile

This versatile profile provides a multitude of design possibilities through the range of size and finish options available.

Example:
Sandstone Standard in Shot-blasted finish



Ribloc® Profile

Bold geometric planes create light and shade

Ribloc masonry, with its eight ribbed appeal, creates clean lines and a geometric uniformity which will give an imposing appearance to any building. Its ribs provide controlled weathering characteristics.

Example:
Sandstone Ribloc® in Shot-blasted finish



Twinbloc™ Profile

A 'stack-bonded' appearance with structural integrity

Twinbloc masonry is the fast, sure, economical way to create the impressive appeal of 'stack bonding'. Created to standard block proportions, Twinbloc incorporates a carefully gauged central groove to give the appearance of two half blocks when laid and yet, as it is laid stretcher-bond, it provides the inherent strength of any DCM wall removing the need for bed-joint reinforcement to stabilise the wall in the majority of situations.

Example:
Sandstone Twinbloc™ in Shot-blasted finish







Airbloc® Profile*

A discrete ventilation block

Innovations in the manufacturing process of our DCM allows us to offer a product that solves the issue of incorporating adequate ventilation into a cavity wall. The purpose made air block is available in all finishes allowing the same external façade to be maintained.

Example:
Sandstone Airbloc® in Shot-blasted finish

* Bespoke versions available

Finishes	Profiles	   			
		Standard	Ribloc®	Twinbloc™	Airbloc®
Fairface		✓	✓	✓	✓
Shot-blasted		✓	✓	✓	✓
Splitface		✓	✓	✗	✓
Burnished Venezia™		✓	✓	✓	✓
Polished Florentine®		✓	✓	✓	✓
Trentino™		✓	✓	✓	✓
Novastone®		✓	✗	✓	✓
Granito™		✓	✗	✓	✓
Medici®		✓	✗	✓	✓



Radius Profile

The machine made Radius Block at a set radius of 490mm.

Example:
Yorkstone Radius in Shot-blasted finish



Bullnose Profile

Standard 100mm thick block with a 50 x 50mm bullnose on one end.

Example:
Yorkstone Bullnose in Shot-blasted finish



Bullnose Quoin Profile

Standard 100mm thick Quoin with a 50 x 50mm radius bullnose.





Example:
Yorkstone Bullnose Quoin in Shot-blasted finish



Fluted Profile

A variation of Ribloc masonry with only four ribs.

Example:
Yorkstone Fluted in Splitface finish

Finishes	Profiles	   			
		Radius	Bullnose	Bullnose Quoin	Fluted
Fairface		✓	✓	✓	✗
Shot-blasted		✓	✓	✓	✗
Splitface		✗	✗	✗	✓
Burnished Venezia™		✓	✓	✓	✗
Polished Florentine®		✓	✓	✓	✗
Trentino™		✗	✗	✗	✗
Medici®		✓	✓	✓	✗

Colours

Pewter
Recycled Content: 15%



Fairface



Shot-blasted



Splitface



Burnished Venezia™



Polished Florentine®



Steel Grey
Recycled Content: 20%



Flint
Recycled Content: 20%



Ivory
Recycled Content: 10%



Diamond
Recycled Content: 0%



* Not recommended for large expanses of block work

Colours

Bathstone
Recycled Content: 20%
ECOBLOCK

Yorkstone
Recycled Content: 20%
ECOBLOCK

Hamstone
Recycled Content: 20%
ECOBLOCK

Straw
Recycled Content: 20%
ECOBLOCK

Sandstone
Recycled Content: 20%
ECOBLOCK

Terracotta
Recycled Content: 20%
ECOBLOCK

Fairface

Shot-blasted

Splitface

Burnished Venezia™

Polished Florentine®



Colours

Damson
Recycled Content: 15%



Fairface



Shot-blasted



Splitface



Burnished Venezia™



Polished Florentine®



Autumn
Recycled Content: 15%



Spruce
Recycled Content: 15%



Sports Green®
Recycled Content: 20%



Sports Blue®
Recycled Content: 20%



* Not recommended for large expanses of block work

Colours

Trentino™

Hamstone

 Recycled Content: 20%





Ivory

 Recycled Content: 10%





Pewter

 Recycled Content: 15%





Novastone®

White

 Recycled Content: 40%





Buff

 Recycled Content: 40%





Granito™

Natural

 Recycled Content: 40%





Dark

 Recycled Content: 40%





Polished Medici®

Bellini®

Recycled Content: 20%



Bronzino

Recycled Content: 0%



Romano

Recycled Content: 10%



Spirito

Recycled Content: 2%




























Products: Medici® Bellini®
Project title: The Library, New Bridge Street,
Newcastle-upon-Tyne
Client: Newcastle City Council
Contractor: Tolent Construction - Gateshead
Architect: Ryder Architecture - Newcastle

Library













Standard Sizes and Weights
Fairface™, Shot-blasted, Venezia™, Florentine® and Trentino™











400mm x 200mm Co-ordinating size - 390mm x 190mm actual face size

Nominal thickness (mm)	90mm	140mm
SOLID	K1  14.0	P1  21.8
HI-LIGHT		P2  16.7
HOLLOW	K3  11.1	P3  12.7
QUOIN	K16  17.6	P16  24.6
135° QUOIN SQUINT	K23  12.3	P23  18.0
CILL	K21  11.5	P21  17.7
SOLID	K11  6.8	P11  10.6

Nominal thickness (mm)	90mm	140mm
HALF HOLLOW	K10  5.4	P10  6.3
HALF QUOIN	K15  10.4	P15  13.4
CAVITY CLOSER	K17  17.6 * 190mm max cut to suit cavity width	P17  24.6 * 190mm max cut to suit cavity width
HALF CAVITY CLOSER	K18  10.4 * 190mm max cut to suit cavity width	P18  13.4 * 190mm max cut to suit cavity width
HALF CILL	K20  5.6	P20  8.6
QUOIN CILL	K21L  14.2	P21L  19.2

Novastone & Granito - Only available in D1 Standards and D16 Quoins
Trentino - Faced ends to Standard D1, H1 and H2 blocks are polished only
- Quoins D16 and H16 are cut & bonded
Medici - Available as standard in Solid G1, Half Blocks G11, Full Quoins G16, Half Quoins G15, Full Cill G21 and Half Cill G20

Nominal thickness (mm)	90mm	140mm
HALF QUOIN CILL	K20R  9.1	P20R  10.0
CILL KICKER	K25L  13.8	P25L  21.4
HALF CILL KICKER	K26  6.6	P26  10.3
INTERNAL CILL	K19  8.9 Internal Cills are available only as cut and bonded products.	P19  11.7 Internal Cills are available only as cut and bonded products.
135° INTERNAL CILL	K24  4.3 Internal Cills are available only as cut and bonded products.	P24  5.6 Internal Cills are available only as cut and bonded products.
JAMB	K30  12.8	P30  19.8

Nominal thickness (mm)	90mm	140mm
135° CILL	K23L  10.0	P23L  14.3
SINGLE PLINTH		P31  20.8
SINGLE PLINTH END		P31L  20.4
FULL LINTEL	K28  9.0* Lintels and Bond Beams are not available in polished finishes.	P28  11.6* Lintels and Bond Beams are not available in polished finishes.
HALF LINTEL	K14  4.4* Lintels and Bond Beams are not available in polished finishes.	P14  5.6* Lintels and Bond Beams are not available in polished finishes.
BOND BEAM	K22  11.1* Lintels and Bond Beams are not available in polished finishes.	P22  12.8* Lintels and Bond Beams are not available in polished finishes.

*Also available: Quoin: Hi-light® - Nominal thickness 100mm / D16HL / 19.1

Typical weight (kg)
Also available for Twinbloc®. Twinbloc® central groove is 10mm wide x 15mm deep to allow for mortar pointing.
Denotes units over 20kg
The hatched areas on the illustrations indicate factory cut faces, in Fairface™





20






Hi-Light®




The revolutionary Hi-Light® block has been designed to provide all the benefits associated with dense masonry, yet is up to 25% lighter than an equivalent solid masonry unit. With a cellular underside but a solid top surface to provide a full bed for mortar, Hi-Light® complies with Health and Safety recommendations and provides complete cover under CDM regulations.

Nominal thickness (mm)	90mm
SOLID	E51  13.0
	E55  19.3

Splitface finishes®

Nominal thickness (mm)	95mm
SOLID	S30  14.9
	S31  7.0
	S32  7.2

Ribloc® Splitface finishes® Fluted Splitface finish®

















Nominal thickness (mm)	95mm
SOLID	E54  14.3
	E56  10.8
SOLID	S34  15.4










Standard Sizes and Weights
Fairface™, Shot-blasted, Venezia™, Florentine® and Trentino™

*Also available: Quoin: Hi-light® - Nominal thickness 100mm / D16HL / 19.1










Typical weight (kg) Also available for Twinbloc®. Twinbloc® central groove is 10mm wide x 15mm deep to allow for mortar pointing.
Denotes units over 20kg The hatched areas on the illustrations indicate factory cut faces, in Fairface™












450mm x 225mm Co-ordinating size - 440mm x 215mm actual face size

Nominal thickness (mm)	90mm	100mm	140mm
SOLID	G1  17.9	D1  19.8	H1  28.0
HI-LIGHT		D2  15.6	H2  19.0
HOLLOW		D3  14.8	H3  18.5
BULLNOSE		D1BN  19.6	
BULLNOSE QUOIN		D16BN  25.0	
HI-LIGHT QUOIN		D16HL  19.1	
QUOIN	G16  23.0	D16  25.2	H16  32.5
135° QUOIN SQUINT	G23  17.4	D23  19.1	H23  25.7

Nominal thickness (mm)	90mm	100mm	140mm
CILL	G21  15.1	D21  17.1	H21  23.2
HALF SOLID	G11  8.7	D11  9.7	H11  13.6
HALF HALLOW		D10  6.8	H10  9.0
HALF QUOIN	G15  13.8	D15  15.0	H15  18.3
CAVITY CLOSER	G17  23.0	D17  25.2	H17  32.5
HALF CAVITY CLOSER	G18  13.8	D18  15.0	H18  18.3

Novastone & Granito - Only available in D1 Standards and D16 Quoins
Trentino - Faced ends to Standard D1, H1 and H2 blocks are polished only
- Quoins D16 and H16 are cut & bonded
Medici - Available as standard in Solid G1, Half Blocks G11, Full Quoins
G16, Half Quoins G15, Full Cill G21 and Half Cill G20

Nominal thickness (mm)	90mm	100mm	140mm
HALF CILL	G20  7.4	D20  8.4	H20  11.4
QUOIN CILL	G21R  19.1	D21R  21.1	H21R  14.0
HALF QUOIN CILL	G20R  11.4	D20R  12.4	H20R  15.5
CILL KICKER	G25R  17.7	D25R  19.7	H25R  27.5
HALF CILL KICKER	G26  8.5	D26  9.5	H26  13.2
INTERNAL CILL	G19  12.0	D19  13.2	H19  16.1
JAMB	G30  16.5	D30  18.6	H30  25.7





Nominal thickness (mm)	90mm	100mm	140mm
135° CILL	G23R  14.6	D23R  16.3	H23R  21.0
135° INTERNAL CILL	G24  6.1	D24  7.9	H24  9.9
SINGLE PLINTH			H31  27.0
SINGLE PLINTH END			H31R  26.8
FULL LINTEL	G28  11.2	D28  13.2*	H28  17.0*
HALF LINTEL	G14  5.5	D14  6.5*	H14  8.3*
BOND BEAM		D22  14.3*	H22  18.3*






Hi-Light®

The revolutionary Hi-Light® block has been designed to provide all the benefits associated with dense masonry, yet is up to 25% lighter than an equivalent solid masonry unit. With a cellular underside but a solid top surface to provide a full bed for mortar, Hi-Light® complies with Health and Safety recommendations and provides complete cover under CDM regulations.

All Splitface® finishes

Nominal thickness (mm)	95mm	95mm
SOLID	S2  9.2	S4  18.9
	S5  13.7	QUOIN S16  24.1

Ribloc® Splitface® finishes Ribloc®, Fairface™, Shot-blasted, Polished and Trentino™ finishes

107.5mm	100mm
E62  20.4	E63  15.5
E57  18.7	E58  23.7

Bespoke elements

Now you can build with total design freedom

Forticrete delivers an almost limitless capability in high quality detailing.

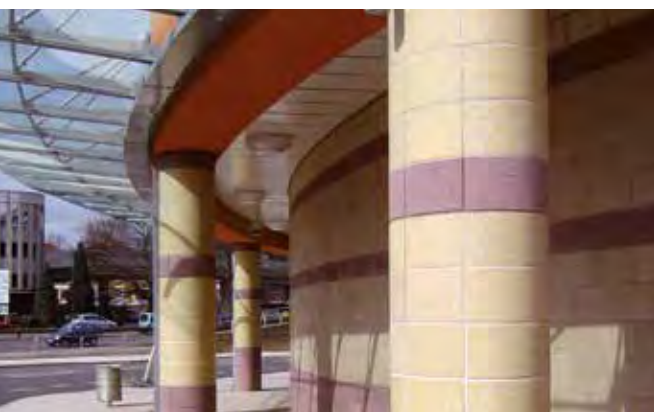
Forticrete's production of specialist Precast elements has developed into a service which offers a virtually limitless capability.

It's a facility which can produce bespoke detailing in a vast array of designs, either to blend into an Architectural Masonry structure or to create stunning highlights within large expanses of masonry or brickwork. Features such as thresholds, arches, circular columns, corbels, cills, lintels, radius details and unique window surrounds are all achievable.



Polished Precast at
Riverside, Hemel Hempstead.

Precast elements at
Clearwater Court, Reading.



High quality bespoke Precast concrete detailing

The use of Forticrete Precast elements can help to recreate the impression of past eras and provide finishing touches to any building, to make it stand out from the crowd.

A range of standard units is available, to fulfill the needs for the more commonplace copings and airbricks, but bespoke elements can be created, each hand moulded by experienced craftsmen to match your designs and to realise your ideals.

Forticrete Precast elements have a mean compressive strength of 35N/mm² and a density of 2300 kg/m³.

Forticrete Precast elements are available in colours that are blended to those of the Fairface and Shot-blast Masonry ranges. Additional variations can be created to specification requirements.

Fairfaced: Pewter, Steel Grey, Flint, Ivory, Bathstone, Yorkstone, Hamstone, Straw, Sandstone, Terracotta, Damson, Autumn, Spruce, Sports Green® and Sports Blue®.

Shot-blasted: Pewter, Steel Grey, Flint, Ivory, Diamond, Bathstone, Yorkstone, Hamstone, Straw, Sandstone, Terracotta, Damson, Autumn, Spruce, Sports Green® and Sports Blue®.

The quality is assured

Forticrete's manufacturing methods and strict adherence to a BSI approved Quality Assurance scheme to BS EN ISO 9001:2000 ensures consistent product quality, whether it's a bespoke, one-off element or multiple units. What's more, Forticrete's manufacturing facilities accommodate flowline production, ensuring that the elements you require are manufactured to the tightest lead times, all with the unmistakable hallmark of Forticrete quality.



Precast Polished Florentine® Autumn -
Da'wah Academy, Leicester.



Precast Bat Boxes
allow bats to create
a natural home habitat
within the block.
Ideal for new build &
conservation work.

The bespoke elements you need to deliver polished appeal

The ability to provide bespoke elements with a highly polished surface once again sets Forticrete apart in the industry. Whether it's detailing to complement the Burnished Venezia™ or Polished Florentine® ranges, or individual units to suit your specific designs, the Forticrete service is a unique capability in UK manufacturing.

Precast units can be created to blend with the Burnished Venezia™ and colour ranges, as follows:

Burnished Venezia™ Polished Florentine®: Pewter, Steel Grey, Flint, Ivory, Diamond, Bathstone, Yorkstone, Hamstone, Straw, Sandstone, Terracotta, Damson, Autumn, Spruce, Sports Green® and Sports Blue®.

Additionally, specialist aggregates or colour variations can be provided to meet specific requirements.



Elements:
All units are made to order.

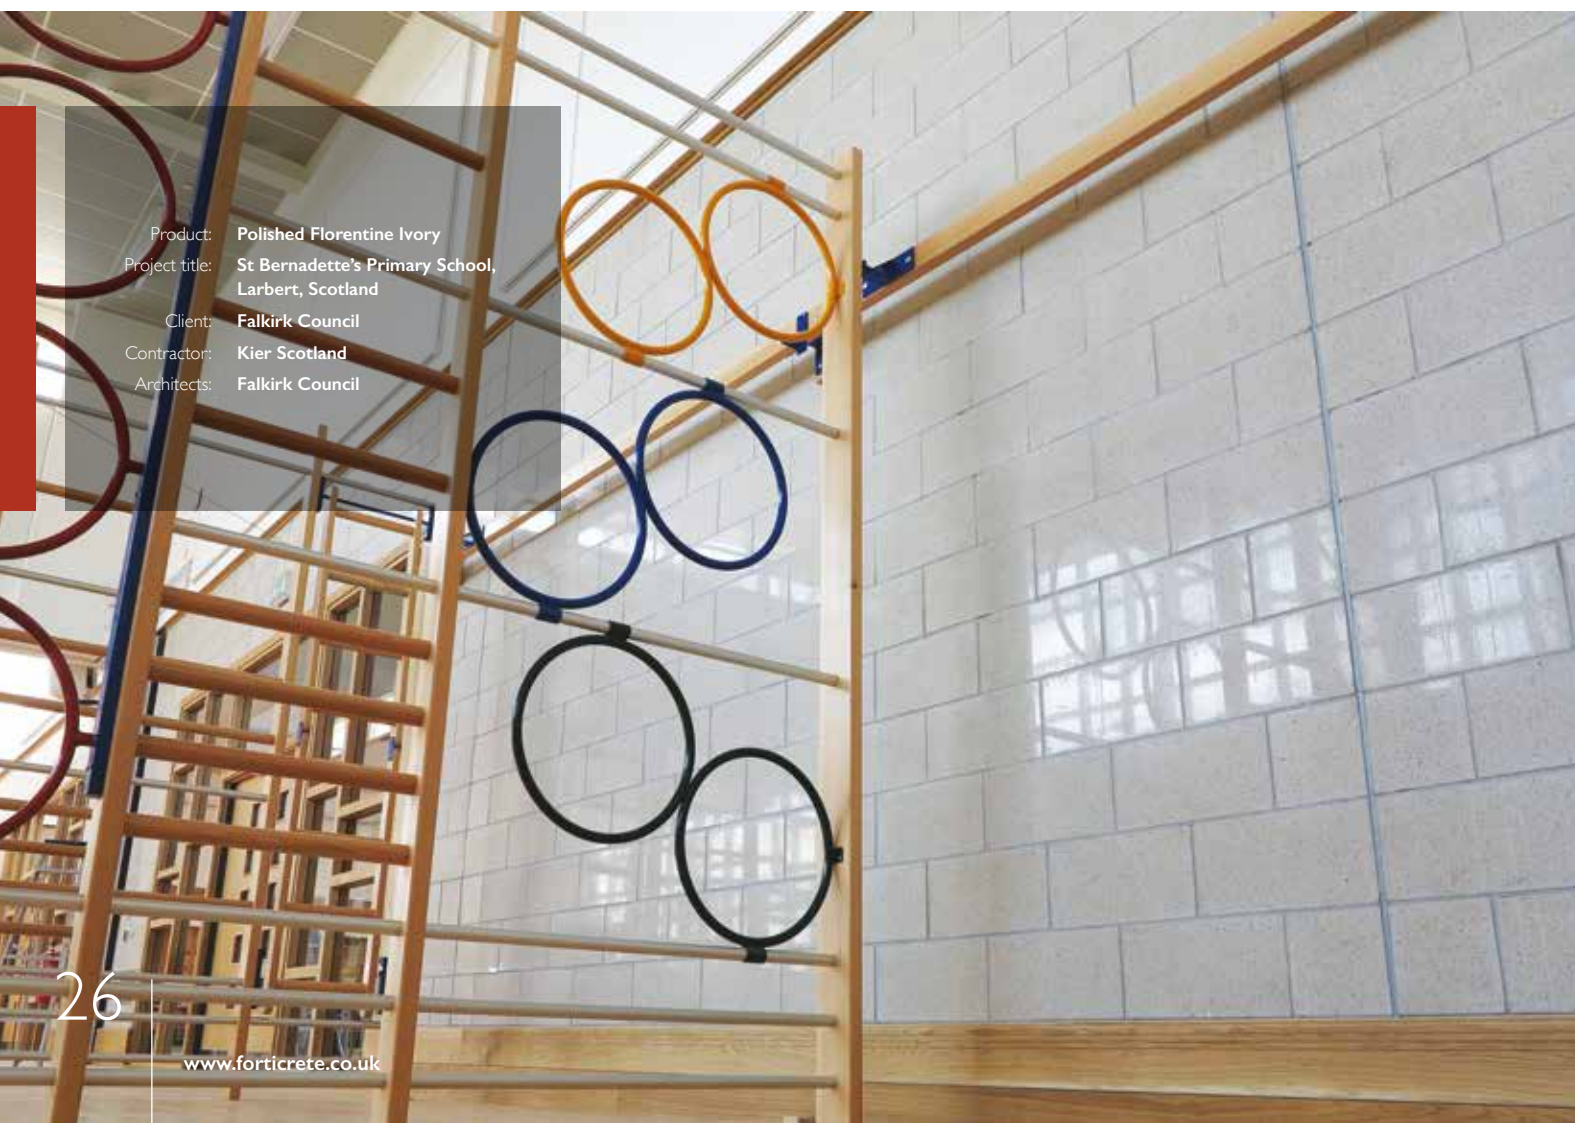
Reinforcement & fixing:
The only reinforcement that is incorporated into Forticrete Precast units is for handling within the factory manufacturing environment. Design for structural reinforcement and specialist fixings should be detailed by the structural engineer carrying out the design for the specific project. The lead times for Polished Precast elements will be reduced considerably if the above information is supplied with the order.



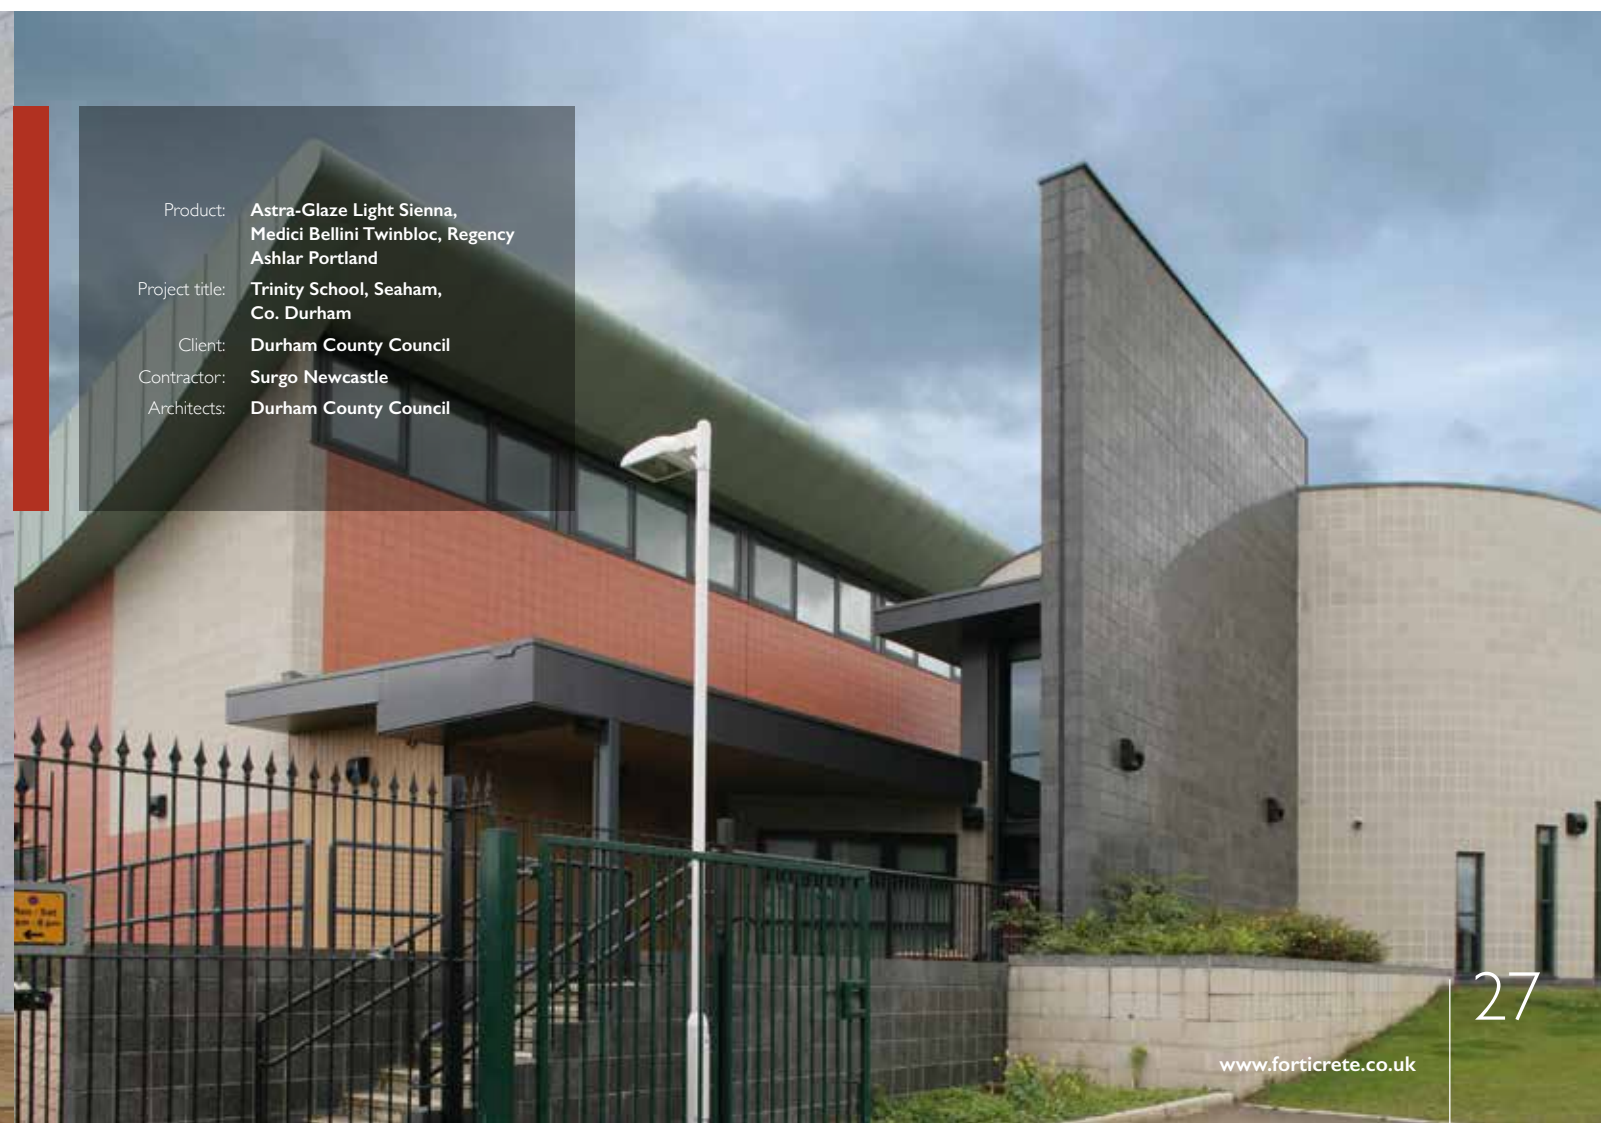
Product: Fairface Sports Green
 Project title: Trinity Catholic College, Middlesbrough
 Client: Middlesbrough Council
 Contractor: Willmott Dixon
 Architects: Aedas Architects



Product: Splitface Steel Grey and Polished Florentine® Steel Grey
 Project title: Sainsbury's, Newcastle-under-Lyme
 Client: J Sainsbury PLC
 Contractor: Bowmer & Kirkland
 Architects: Chetwood Architects



Product: Polished Florentine Ivory
 Project title: St Bernadette's Primary School, Larbert, Scotland
 Client: Falkirk Council
 Contractor: Kier Scotland
 Architects: Falkirk Council



Product: Astra-Glaze Light Sienna, Medici Bellini Twinbloc, Regency Ashlar Portland
 Project title: Trinity School, Seaham, Co. Durham
 Client: Durham County Council
 Contractor: Surgo Newcastle
 Architects: Durham County Council



Product samples

The colours reproduced within this brochure are as accurate as the photographic and printing processes will allow. Where colour matching is critical, you are advised to view actual product samples. Slips are available as samples, please specify when requesting.

These are available by calling **01909 775000**.

Masonry Sales enquiries:

Forticrete Limited,
Anstone, Kiveton Park Station,
Kiveton Park,
Sheffield
S26 6NP

Tel: 01909 775000 (Option 2)

Fax: 01909 775043

E-mail: masonry@forticrete.com



Forticrete, Florentine, Novastone, Ribloc, Hi-Light, Twinbloc, Airbloc, Sports Green, Sports Blue, Ecoblock, Medici, Ecoblock Plus and the E device are registered trademarks of Forticrete Ltd. Venezia, Granito, Quailstone and Trentino are trademarks of Forticrete Ltd.

All relevant Forticrete products are CE marked. Declarations of Performance are available at www.forticrete-ce.com

This document does not form part of any contract and Forticrete cannot accept liability for any errors or omissions.

In order to maintain its position as a market leader, Forticrete operates a policy of continuous product development and therefore reserves the right to alter specifications without notice.

Although the instructions contained in this publication and any other information published by Forticrete are believed to be accurate at the date of publication, they are strictly for guidance only and Forticrete accepts no liability in relation to their use or for any losses, howsoever caused. You are responsible for taking all reasonable steps to ensure your use of the goods/products conforms to all applicable health and safety requirements from time to time. If in doubt, please consult appropriately qualified persons. All products sold by Forticrete are sold subject to Forticrete's Terms and Conditions of Sale, a copy of which is available on request.

www.forticrete.co.uk

© Forticrete Ltd. 2016. All rights reserved.

