




Fixed Bollard 900mm Above Ground 48mm -101mm Diameter Galvanised

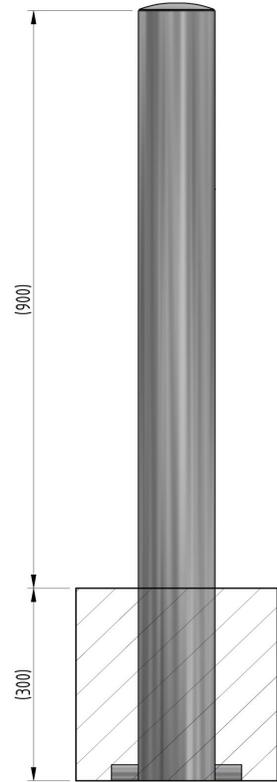

The galvanised mild steel range of 900mm tall fixed bollards are suitable for a range of applications and are ideal as a complement to the Autopa ranges of Parking Posts, RemovaPosts and RetractaPosts.

The round posts are available in 48mm - 193mm diameter tube and come finished with a welded steel cap.

The Fixed Post is available with extended legs for casting into concrete or a flange plate for bolting down.

Removable and colour coated versions also available

<u>Part Number</u>	<u>Diameter and Fixing Detail</u>
138 121 033	48mm (Concrete In)
138 121 038	48mm (Bolt Down)
138 121 113	60mm (Concrete In)
138 121 118	60mm (Bolt Down)
138 121 243	76mm (Concrete In)
138 121 242	76mm (Bolt Down)
138 121 293	90mm (Concrete In)
138 121 292	90mm (Bolt Down)
138 121 313	101mm (Concrete In)
138 121 311	101mm (Bolt Down)
138 100 994	M12 Expanding Bolt (3 required per post)

Product details

- 900mm tall
- Cast in posts 300mm below ground
- Reflective bands available
- Colour coated options available extra
- Larger diameter versions available

Installation & use

Bolt down Fixed Posts require bolting down to a suitable concrete surface (no less than 400mm³).

48mm- 114mm three M12 bolts, 139mm - 193mm four M16 bolts.

Concrete In Fixed Posts are supplied with welded fixing spikes to ensure firm ground anchorage.

Concrete In Fixed Posts require an excavated hole (no less than 300mm deep) for installation.

This product is guaranteed for 12 months (if installed and used correctly).

www.autopa.co.uk
+44 (0)1788 550556



AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

