

## Square Fixed Bollard 900mm Above Ground 50mm - 80mm Square **Galvanised**






The galvanised mild steel range of 900mm tall square fixed bollards are suitable for a range of applications and are ideal as a complement to the Autopa ranges of square Parking Posts, RemovaPosts and RetractaPosts.

The bollards are available in 50mm - 150mm square tube and come with a welded flat steel

The Fixed Post is available with extended legs for casting into concrete or a flange plate for bolting down.

Removable and colour coated versions also available.

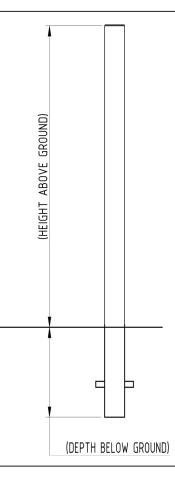

Part Number	Diameter and Fixing Detail
138 121 864	50 x 50mm (Concrete In)
138 121 864F	50 x 50mm (Bolt Down)
138 121 854	60 x 60mm (Concrete In)
138 121 854F	60 x 60mm (Bolt Down)
138 121 867	70 x 70mm (Concrete In)
138 121 867F	70 x 70mm (Bolt Down)
138 121 874	80 x 80mm (Concrete In)
138 121 874F	80 x 80mm (Bolt Down)
138 100 994	M12 Expanding Bolt (3 required per post)
138 100 993	M12 Foundation Bolt (3 required per post)
138 100 995	M12 Rawl Bolt (3 required per post)

## **Product details**

- 900mm tall
- Cast in posts 300mm below ground
- Reflective bands available

- Colour coated options available extra
- Larger diameter versions available

## Installation & use

Bolt Down Fixed Posts require bolting to a suitable concrete surface (no less then 300mm cube) by means of three M12 bolts. Concrete In Fixed Posts are supplied with welded fixing spikes to ensure firm ground anchorage. Concrete In Fixed Posts require an excavated hole (no less than 300mm deep) for installation. This product is guaranteed for 12 months (if installed and used correctly).





