




RAL 9006
White Aluminium

MARANOA

MARANOA has an attractive asymmetric design that uses blocks and spaces to create a distinctive appearance. The large flat tubes are both stylish and practical and, with left or right hand side mounting options, it offers flexibility in any project. MARANOA is available in selected RAL, metallic or special metallic finishes.

DIMENSIONS

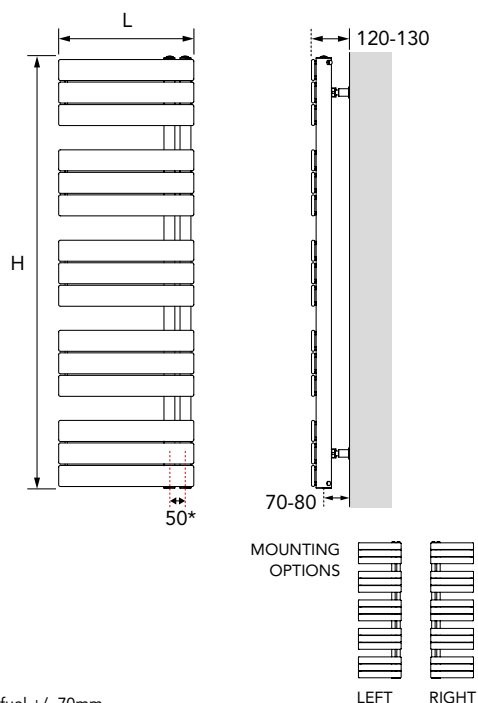

*For dual fuel +/- 70mm.

WEIGHTS, WATER CONTENTS & n-COEFFICIENTS

Model	Weight (kg)	Water Content (l)	n-Coefficient
CHO2	21.28	8.5	1.272

GENERAL SPECIFICATION



CERTIFICATION

Manufactured and tested to EN 442. Carries the BS Kitemark and CE Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.



GUARANTEE

10 year guarantee from date of purchase against manufacturing defects.



COLOUR

Finished in white (RAL 9016) or selected RAL, textured, metallic or shimmer metallic colours. Please see page 278.



MATERIAL

Manufactured from steel.



SYSTEM

2 pipe pumped indirect domestic and commercial heating applications.



CONNECTIONS

2 x 1/2" BSP as standard.



AIR VENTS

Integrated.



OPERATING PRESSURES

Tested to a pressure of 5.2 bar. Working pressure of up to 4 bar.



DUAL FUEL

ECO450 dual fuel heater kit available. Please see page 144.



DELIVERY

Non-stocked item: 6 - 8 weeks.



VALVES

Please see page 144.

For more general information, please see page 276.

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Dual Fuel Rating
			Watts	Btu/h	Watts	Btu/h	
CHO2	1430	600	855	2917	446	1522	450